




# Swivel Rope Socket

DESCRIPTION	WT (Lb)	PART NUMBER
Socket, Complete 1 3/8" (For 1/2" and 9/16" line)	3 3/4 (Lb)	556-578-310
Lower Half	2 (Lb)	
With 5/8" API Box		556-602-993
Upper Half		
1/2" and 9/16" line	1 3/4 (Lb)	556-601-956
Socket Complete 1 3/4" (For 1/2" and 9/16" line)	6 3/4 (Lb)	556-578-320
Socket Complete 1 3/4" (For 5/8" line)	6 3/4 (Lb)	556-578-320
Lower Half		
With 3/4" API Box	4 (Lb)	556-602-106
Upper Half		
1/2" and 9/16" line	2 3/4 (Lb)	556-601-856
5/8" line	2 3/4 (Lb)	556-601-862

The Trico Swivel Rope Socket is used to connect the wireline to the sinker bar for swabbing. The swivel permits free turning of the swab under the load.

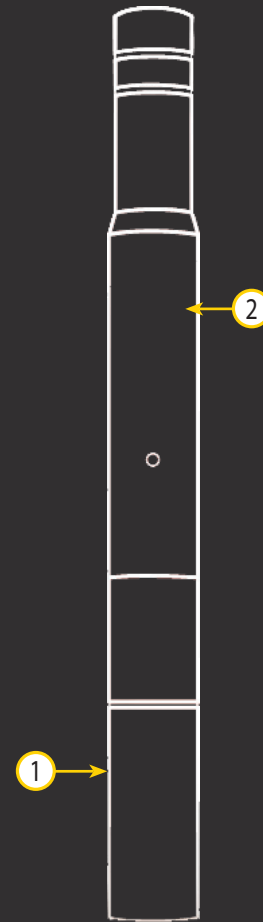

# Spin Wrench

The Trico Sucker Rod Spin Wrench is a one piece tool manufactured from high tensile strength alloy steel. The wrench opening fits the square on sucker rods and is accurately machined to reduce user fatigue. The Spin Wrench is available in two sizes: Part No. 555-559-500 is furnished for 5/8 inch API rods and Part No. 555-559-600 is used for 3/4 and 7/8 inch API rods.

