

[Click here to view bookmarks.](#)



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Air Preparation Units

Parker-Watts General Line FRL, Hi-Flow FRL
& Desiccant Dryers

Catalog 0730-2



Parker

ENGINEERING YOUR SUCCESS.

Warnings, Offer of Sale **CAUTION:**

Polycarbonate bowls, being transparent and tough, are ideal for use with Filters and Lubricators. They are suitable for use in normal industrial environments, but should not be located in areas where they could be subjected to direct sunlight, an impact blow, nor temperatures outside of the rated range. As with most plastics, some chemicals can cause damage. Polycarbonate bowls should not be exposed to chlorinated hydro-carbons, ketones, esters and certain alcohols. They should not be used in air systems where compressors are lubricated with fire-resistant fluids such as phosphate ester and di-ester types.

Metal bowls are recommended where ambient and/or media conditions are not compatible with polycarbonate bowls. Metal bowls resist the action of most such solvents, but should not be used where strong acids or bases are present or in salt laden atmospheres. Consult the factory for specific recommendations where these conditions exist.

TO CLEAN POLYCARBONATE BOWLS USE MILD SOAP AND WATER ONLY! DO NOT use cleansing agents such as acetone, benzene, carbon tetrachloride, gasoline, toluene, etc., which are damaging to this plastic.

Metal bowl guards are recommended for all applications.

 **CAUTION:**

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.

 **WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled "Offer of Sale".

Table of Contents

General Information - Particulate & Coalescing Filters.....	2-3
Particulate Filters	
Miniature Particulate Filters.....	4-7
Compact Particulate Filters	8-9
Standard Particulate Filters	10-11
Hi-Flow Particulate Filters	12-19
Coalescing Filters	
Miniature Coalescing Filters	20-23
Compact Coalescing Filters	24-25
Standard Coalescing Filters	26-27
Hi-Flow Coalescing Filters.....	28-31
Bulk Liquid Separators.....	32-35
Desiccant Dryers.....	36-37
General Information - Regulators.....	38-39
Regulators	
Miniature Regulators.....	40-49
Economy Regulators	50-51
Compact Regulators.....	52-53
Standard Regulators.....	54-57
Hi-Flow Regulators.....	58-61
Pilot Operated Regulators	62-67
General Information - Filter / Regulators	68-69
Filter / Regulators	
Miniature Filter / Regulators	70-75
Compact Filter / Regulators	76-77
Standard Filter / Regulators	78-79
General Information - Lubricators.....	80-81
Lubricators	
Miniature Mist Lubricators.....	82-85
Compact Micro-Mist Lubricators	86-87
Standard Micro-Mist Lubricators	88-89
Standard Mist Lubricators.....	90-93
Hi-Flow Mist Lubricators	94-95
Combinations	
Miniature Combinations.....	96-99
Compact & Standard Combinations	100-103
Safety Guide.....	106-107
Offer of Sale	108

Particulate and Coalescing Filters

Filtration

The average 10-hp compressor handles four million cubic inches of air per hour. This air can contain billions of contaminating particles.

At high concentration and high speed, these particles can be extremely harmful. They block orifices, erode components, and clog clearances between moving parts.

In addition, when ambient air is drawn into a compressor, it can, depending on weather conditions, have relative humidity up to 100 percent. As air is compressed and cooled, some water vapor¹ condenses out as free water, and even with a compressor aftercooler, some moisture is swept downstream into the air system. This may result in rusted pneumatic tools and components, contaminated lubricants, and frozen air lines during low temperature periods.

Other types of foreign matter in air lines include: impurities generated within the air line, such as wear particles, pipe scale and rust; construction and assembly debris; and contaminants introduced into the air system during maintenance or through leakage passages.

All these contaminants, which are of a size to cause air stream problems, should be removed by the filter.

¹ Water vapor, which is a gas, is not a contaminant in pneumatic systems until it condenses.

How to Select the Proper Filter

Filter element rating is the prime selection criterion. This rating must match the requirements of all downstream components. Next, the flow capacity and pressure rating of the filter should be considered. Finally, port size should match system piping to avoid unnecessary pressure drops through restricting adapters.

Bowl material and the type of drain for the application are other choices to be made.

The first step in choosing a filter is to determine the filtration requirements of the most critical components used in that system.

Contamination particle size is measured in micrometers. A micrometer is one millionth of a meter or 0.000039 inches. Frequently, micrometer is abbreviated as micron or symbolized by the Greek letter μ . Particle-removing filter elements are rated² according to the particle size they will trap. For most industrial applications, filter elements rated at 40 microns are adequate. When necessary, filtration as low as 5 microns or finer can be provided. Remember, however, that finer filtration increases the pressure drop through the element. As micron size rating varies, so does the size and type of filter.

Most oils entrained in a compressed air stream are in the form of tiny mist or aerosol droplets which can pass through a standard industrial filter element. If it is necessary to remove these aerosols, an oil-removal type coalescing filter can be used. The sub-micron oil particles which

escape an oil-removal filter should have no detrimental effect on industrial pneumatic components. But if these particles must be removed for applications such as spray painting, a coalescing type element should be used.

² The inexact nominal filter element rating indicates that most particles that size or larger will be trapped. The absolute rating indicates that all particles that size or larger will be trapped.

Filter Construction

Most pneumatic filters consist of two basic elements: a die-cast body, into which the inlet and outlet piping is connected, and a sealed removable bowl which contains collected contaminants.

The bowl is fitted with a drain mechanism to remove liquids before they rise to the baffle level. The drain system usually operates while the filter is under pressure, but the unit must be exhausted to remove the bowl for cleaning and element service. The piping need not be disturbed.

Generally a transparent bowl is the most convenient because it provides easy visual inspection of the sump level. However, hostile environment, higher pressure, or higher temperature may require a metal bowl for safety.

The most common plastic used for bowls is polycarbonate. This material performs satisfactorily for air pressures below 150 PSIG and temperatures between 40° and 120° F. Parker offers polyethylene bowl guards for added safety.

As the pressure or temperature requirement increases, you may have to specify a metal bowl with sight gauge. For extreme conditions, it is recommended that the sight gauge be eliminated. (Please refer to the individual model descriptions for specifications on bowls.)

Thus, the environment determines the choice of bowl. Polycarbonates offer great strength and visibility, but can be attacked by certain chemicals. Metal bowls offer the highest pressure and temperature rating, and provide superior protection when installed in an environment containing chemicals that are incompatible with polycarbonate.

Filter Operation


When pressurized air enters a typical filter body, the curved inlet and deflector direct the incoming air in a downward whirling pattern. Centrifugal force hurls the larger solid and liquid water particles outward where they collect on the inner surface of the filter bowl. The particles spiral down past a baffle into a quiet chamber. The baffle prevents turbulent air in the upper bowl from re-entraining liquid contaminants and carrying them downstream.

Then the dry, cleaner air follows a convoluted path through the filter element, where finer solid particles are filtered out. Finally, filtered air passes up the center of the element and out the discharge port.

Particulate and Coalescing Filters

⚠ Warning

The plastic material used to manufacture the plastic bowls, and the sight gauge on metal bowls, may be attacked by certain chemicals. Do not use this filter on systems with air supplied by a compressor lubricated with synthetic oils or oils containing phosphate esters or chlorinated hydrocarbons. These oils can carry over into the air lines and chemically attack and possibly rupture the bowl or sight gauge. Also, do not expose the bowl or sight gauge to materials such as carbon tetrachloride, trichloroethylene, acetone, paint thinner, cleaning fluids, or other harmful materials, for they too will cause the plastic to craze and/or rupture. For use in environments where these, or any, chemicals may be present, consult the factory for approval.

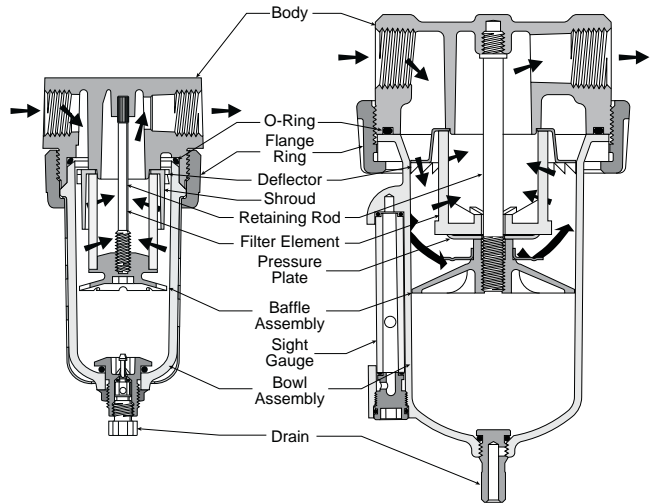

Particulate Filters

Coalescing Filters


These high-efficiency filters operate on a somewhat different principle than particulate air filters. The key difference is in the element, where a fiber network is narrowly spaced to trap smaller contaminants. The special fibers hold any liquid particle which contacts them.

Pre-filtered (A particulate filter must be used prior to a coalescing filter) air enters the cylindrical element at the center. As it flows through the element, particles are captured by three different mechanisms: direct interception as particles impinge on the fibers; inertial impaction as particles are thrown against fibers by the turbulent air stream; and diffusion as smaller particles vibrate with Brownian movement to collide with fibers and other particles. As a result, coalescing elements can capture particles smaller than the nominal size of the flow passages through the element.

Collected liquid migrates to the crossing points of the fibers where larger drops form or coalesce. Pressure differential through the element then forces these drops to the downstream surface of the element where they gravitate downward to the sump.


The filtered air then exits through the outlet port.

It is very important that the air be pre-filtered, as larger contaminants tend to block the passages between fibers, reducing the efficiency of the coalescing element.

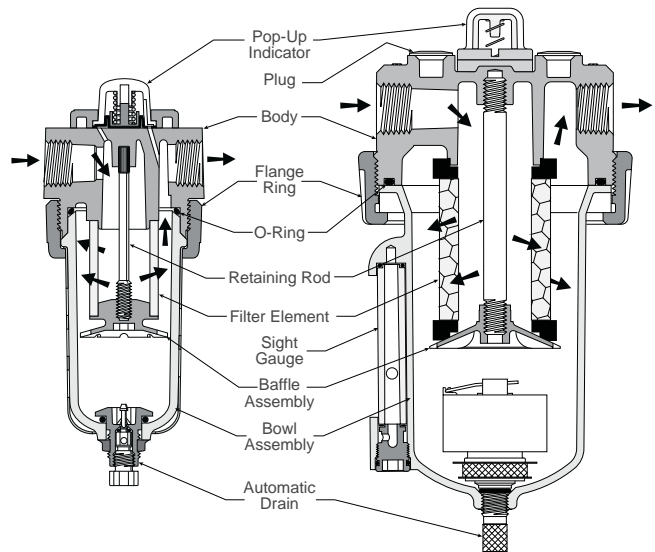

Coalescing Filters



14F Filters – Miniature



Features

- Excellent water removal efficiency
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Easily disassembled for servicing without the use of tools
- 5 Micron element standard
- Interchangeable twist and automatic pulse drains
- High flow: 1/8" – 22 SCFM[§]
1/4" – 24 SCFM[§]

Automatic Pulse Drain

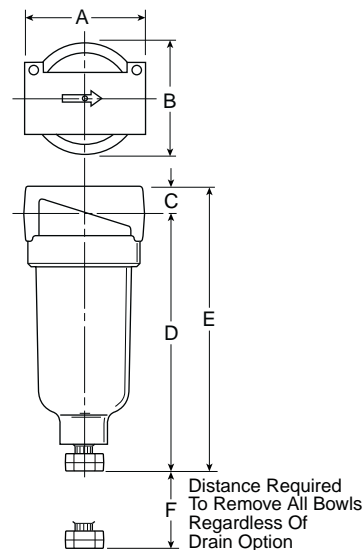


Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Poly Bowl †		
1/8"	14F01B*	14F05B*
1/4"	14F11B*	14F15B*
Metal Bowl without Sight Gauge		
1/8"	14F03B*	14F07B*
1/4"	14F13B*	14F17B*

14F Filter Dimensions		
A	B	C
1.69 (43)	1.53 (39)	.39 (10)
D	D†	E
3.82 (97)	3.87 (99)	4.21 (107)
E†	F	
4.26 (108)	1.60 (41)	

Standard part numbers shown bold.
 For other models refer to ordering information below.
 † For polycarbonate bowl see Caution on page inside cover.
 § SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Inches (mm)
 † With Automatic Pulse Drain.

Ordering Information



Port Size
0 1/8 Inch
1 1/4 Inch

Bowl Options
<u>Polycarbonate Bowl</u>
1 Twist Drain
5 Automatic Pulse Drain
<u>Metal Bowl</u>
3 Twist Drain
7 Automatic Pulse Drain



Elements
A 40 Micron
B 5 Micron
Z Adsorber

Engineering Level
* Will be Entered at Factory

Port Type
Blank NPT
1 BSPP
2 BSPT

BOLD ITEMS ARE MOST POPULAR.

Technical Information

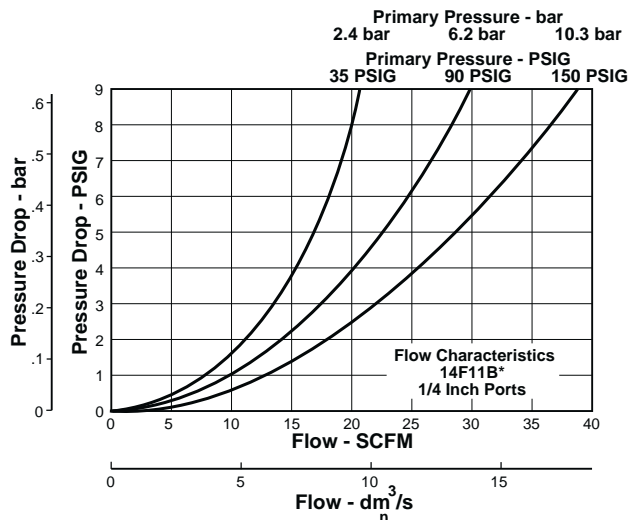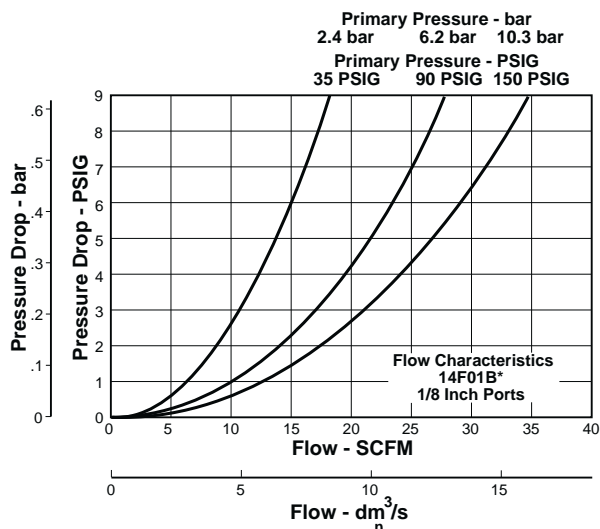

CAUTION:

Polycarbonate bowls and sight dome, being transparent and tough, are ideal for use with Filters and Lubricators. They are suitable for use in normal industrial environments, but should not be located in areas where they could be subjected to direct sunlight, an impact blow, nor temperatures outside of the rated range. As with most plastics, some chemicals can cause damage. Polycarbonate bowls and sight dome should not be exposed to chlorinated hydro-carbons, ketones, esters and certain alcohols. They should not be used in air systems where compressors are lubricated with fire-resistant fluids such as phosphate ester and di-ester types.

Metal bowls are recommended where ambient and/or media conditions are not compatible with polycarbonate bowls. Metal bowls resist the action of most such solvents, but should not be used where strong acids or bases are present or in salt laden atmospheres. Consult the factory for specific recommendations where these conditions exist.

TO CLEAN POLYCARBONATE BOWLS USE MILD SOAP AND WATER ONLY! DO NOT use cleansing agents such as acetone, benzene, carbon tetrachloride, gasoline, toluene, etc., which are damaging to this plastic.

Metal bowl guards are recommended for all applications.

14F Filter Kits & Accessories

Bowl Kits –

- Poly Bowl –
 - Automatic Pulse Drain PS408B
 - Twist Drain PS404
- Metal Bowl –
 - Automatic Pulse Drain PS451B
 - Twist Drain PS447B

Filter Element Kits –

- 40 Micron PS401
- 5 Micron PS403
- 5 Micron Cartridge Kit PS407
- Adsorber PS452

Mounting Bracket Kit PS417B

Specifications


- Automatic Pulse Drain Tube Barb** 1/8 Inch
- Bowl Capacity** 1 Ounce
- Port Threads** 1/8, 1/4 Inch
- Pressure & Temperature Ratings –**
 - Polycarbonate Bowl 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
 - Metal Bowl 0 to 250 PSIG (0 to 17.2 bar)
 32°F to 175°F (0°C to 80°C)
 - Automatic Pulse Drain 10 to 250 PSIG (0.7 to 17.2 bar)
 at 125°F (52°C) or less
- Weight** 0.41 lb. (0.18 kg)

Materials of Construction

- Body** Zinc
- Bowls** Transparent Polycarbonate
 Metal (Zinc) Bowl w/o Sight Gauge
- Deflector, Element Holder & Baffle** Plastic
- Drains –**
 - Twist Drain –
 - Body & Stem Plastic
 - Seals Nitrile
 - Automatic Pulse Drain –
 - Piston & Seals Nitrile
 - Stem, Seat, Adaptor & Washers Aluminum
- Filter Elements –**
 - 5 Micron (Standard) Plastic
 - 40 Micron (Optional) Plastic
 - Adsorber (Optional) Activated Charcoal
- Seals** Nitrile




F504 Filters – Miniature



Features

- Excellent water removal efficiency
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Easily disassembled for servicing without the use of tools
- Interchangeable twist and automatic pulse drains
- High flow: 22 SCFM[§]

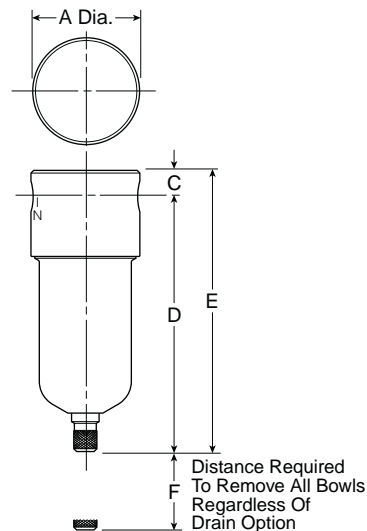


Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Polycarbonate Bowl [†]		
1/8"	F504-01AH	F504-01AHS
1/4"	F504-02AH	F504-02AHS
Metal Bowl without Sight Gauge		
1/8"	F504-01DH	F504-01DHS
1/4"	F504-02DH	F504-02DHS

F504 Filter Dimensions		
A 1.56 (39.7)	C 0.38 (9.5)	D 3.78 (96)
D[†] 3.62 (92)	E 4.16 (105.6)	E[†] 4.00 (101.6)
F .75 (77)	F[†] .75 (77)	

Standard part numbers shown bold.
 For other models refer to ordering information below.
[†] For polycarbonate bowl see Caution on page inside cover.
[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Inches (mm)
[†] With Metal Bowl

Ordering Information




Port Threads — NPT G BSPP	Port Size 01 1/8 Inch 02 1/4 Inch	Bowl A Polycarbonate D Metal	Elements G 5 Micron H 20 Micron	Drains and Options Blank Manual Twist Drain S Automatic Pulse Drain U Semi-Auto Drain X11 No Internal Parts X33* Polyurethane Bowl X64 Fluorocarbon Seals X67 With Mounting Bracket	Engineering Change Designator Will be entered at factory.
--	--	---	--	--	---

* Add .65" to overall length.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

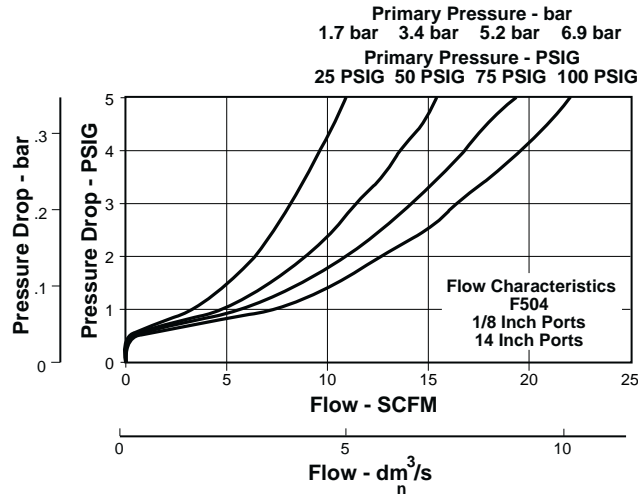

F504 Filter Kits & Accessories

- Bowl Kits –**
 Metal (D)BK505Y
 Metal (D) with Automatic Pulse Drain.....BK505SY
 Polycarbonate (A)BK504Y
 Polycarbonate (A) with Automatic Pulse Drain..... BK504SY
- Drain Kits –**
 Automatic Pulse Drain RK504SY
 Manual Twist Drain SA600Y7-1
 Semi-Automatic “Overnight” Drain SA602A7
 (Drains automatically under zero pressure)
- Filter Element Kits –**
 5 Micron (All)..... EK504VY
 20 Micron (All).....EK504Y
- Mounting Bracket Kit** Must be Ordered with Filter

Specifications

- Bowl Capacity** 1 Ounce
- Port Threads** 1/8, 1/4 Inch
- Pressure & Temperature Ratings –**
 Polycarbonate Bowl 0 to 150 PSIG (0 to 10.2 bar)
 40°F to 125°F (4.4°C to 52°C)
 Metal Bowl.....0 to 300 PSIG (0 to 20.4 bar)
 40°F to 180°F (4.4°C to 82.2°C)
 With Automatic Pulse Drain 175 PSIG Max. Press. (11.9 bar)
- Weight**
 Polycarbonate Bowl 0.3 lb. (0.14 kg) / Unit
 7 lb. (3.18 kg) / 24-Unit Master Pack
 Metal Bowl..... 0.5 lb. (0.23 kg) / Unit
 12 lb. (5.44 kg) / 24-Unit Master Pack


Materials of Construction

- Body** Aluminum
- Bowls** Polycarbonate
 Metal (Zinc)
- Drains** Brass
- Filter Elements** Polypropylene
- Seals** Nitrile

() = BOWL TYPE




F602 Filters – Compact



Features

- Excellent water removal efficiency
- Unique deflector plate and shroud creates a swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- Optional automatic float drain available
- Shown with recommended metal bowl guard
- High flow: 1/4" – 53 SCFM[§]
 3/8" – 80 SCFM[§]
 1/2" – 85 SCFM[§]

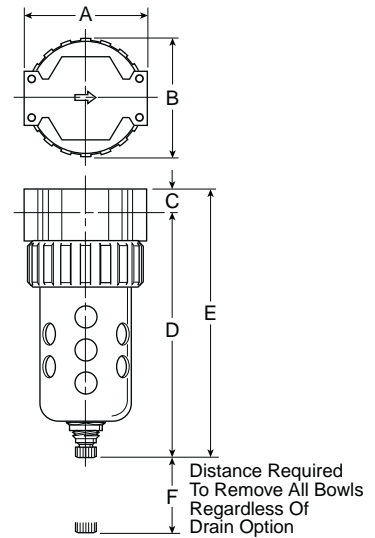

Port Size	NPT	
	Twist Drain	Automatic Float Drain
Poly Bowl [‡] / Metal Guard		
1/4"	F602-022A*	F602-026A*
3/8"	F602-032A*	F602-036A*
1/2"	F602-042A*	F602-046A*
Metal Bowl / Sight Gauge		
1/4"	F602-024A*	F602-028A*
3/8"	F602-034A*	F602-038A*
1/2"	F602-044A*	F602-048A*

F602 Filter Dimensions			
A	B	C	D
2.81 (71)	2.74 (70)	.53 (13)	5.69 (145)
D [†]	E	E [†]	F
5.74 (146)	6.22 (158)	6.27 (159)	2.25 (57)

Inches (mm)

[†] With Automatic Float Drain


Standard part numbers shown bold.

For other models refer to ordering information below.

[‡] For polycarbonate bowl see Caution on inside cover.

[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information



Port Threads
— NPT
G* BSPP

* 1/4 & 3/8 inch meet ISO 1179-1 Standard.

Port Size
02 1/4 Inch
03 3/8 Inch
04 1/2 Inch

Bowl Options	
<u>Polycarbonate Bowl</u>	<u>Metal Bowl</u>
2 Metal Bowl Guard / Twist Drain	3 Twist Drain
6 Metal Bowl Guard / Auto Float Drain	4 Sight Gauge / Twist Drain
	7 Auto Float Drain
	8 Sight Gauge / Auto Float Drain




Element
A 40 Micron

Engineering Level
* Will be Entered at Factory.

Options
Blank None

BOLD ITEMS ARE MOST POPULAR.

Technical Information

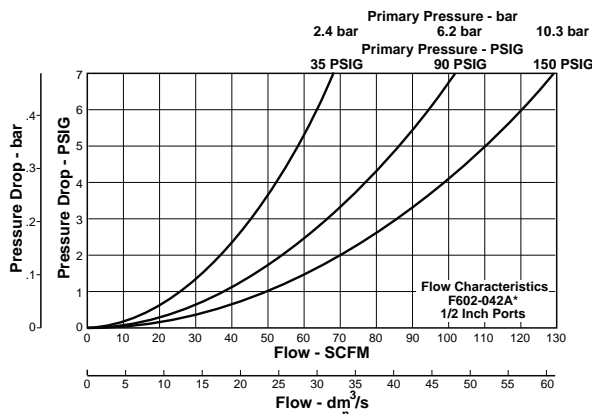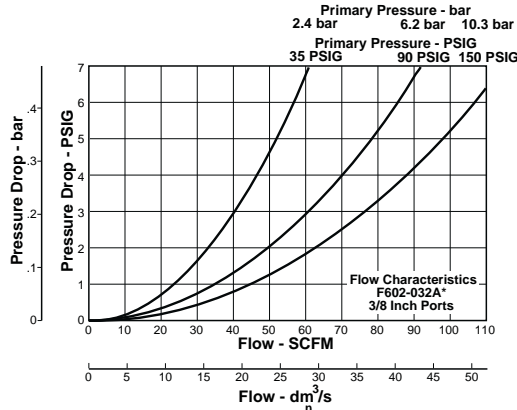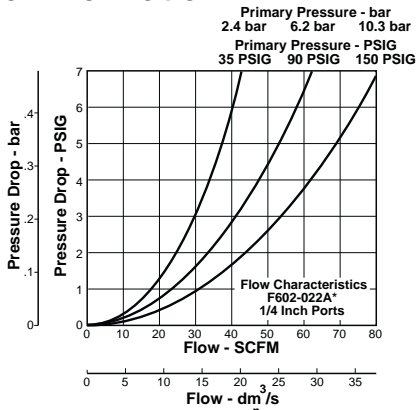

F602 Filter Kits & Accessories

- Bowl Guard KitPS705
 - Bowl Kits –
 - Poly Bowl –
 - Automatic Float DrainPS722
 - Twist Drain.....PS732
 - Polycarbonate (B) (Old F602).....BK602Y
 - Metal Bowl –
 - Automatic Float Drain.....PS726
 - Twist Drain.....PS734
 - Sight Gauge / Automatic Float DrainPS723
 - Sight Gauge / Twist Drain.....PS735
 - Metal with Sight Gauge (W) (Old F602)BK605WY
 - DPI Replacement KitPS781
 - Drain Kits –
 - Automatic Float Drain.....PS506
 - Twist Drain.....PS512
 - Internal Auto (All) (Old F602).....SA602MD
 - Manual Twist (All) (Old F602)SA600Y7-1
 - Filter Element Kits –
 - 40 MicronPS701
 - 5 Micron (B,W) (Old F602).....EK602VY
 - 40 Micron (B,W) (Old F602).....EK602Y
 - Mounting Bracket KitPS743
 - Mounting Bracket Kit (Old F602).....(All) SAF602-0571
 - Sight Gauge Kit.....PS914
- Specifications**
- Bowl Capacity 4.4 Ounces
 - Sump Capacity 1.75 Ounces
 - Port Threads 1/4, 3/8, 1/2 Inch

Pressure & Temperature Ratings –

- Without Differential Pressure Indicator:
 - Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
32°F to 125°F (0°C to 52°C)
 - Metal Bowl – 0 to 250 PSIG (0 to 17.2 bar)
32°F to 175°F (0°C to 80°C)
- With Differential Pressure Indicator: 0 to 150 PSIG (0 to 10.3 bar)
32°F to 125°F (0°C to 52°C)
- Automatic Float Drain – 15 to 250 PSIG (1.0 to 17.2 bar)


Weight..... 1.4 lb. (0.6 kg)

Materials of Construction

- Body..... Zinc
- Bowls..... Transparent Polycarbonate or
Metal (Zinc) With or Without Sight Gauge
- Bowl Guards Steel
- Collar Plastic
- Deflector, Shroud & Baffle Plastic
- Drains –
 - Twist Drain – Body & Nut.....Plastic
 - Automatic Float Drain – Housing, Float.....Plastic
 - Seals..... Nitrile
 - Springs, Push Rod Stainless Steel
- Filter Elements –
 - 40 Micron (Standard)Plastic
 - Adsorber (Optional) Activated Charcoal
- Seals Nitrile
- Sight Gauge Nylon




F602 Filters – Standard



Features

- Excellent water removal efficiency
- Unique deflector plate and shroud creates a swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- Optional automatic float drain available
- Shown with recommended metal bowl guard
- High flow: 3/4" – 145 SCFM[§]

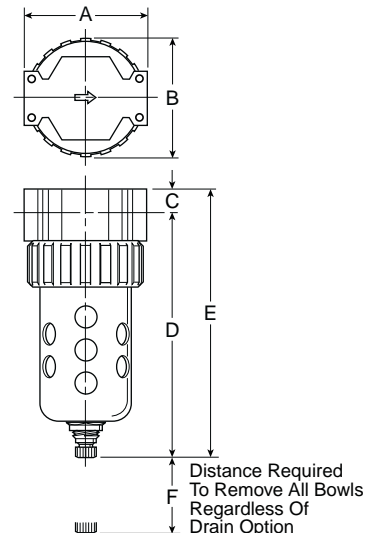


Port Size	NPT	
	Twist Drain	Automatic Float Drain
Poly Bowl [‡] / Metal Guard		
3/4"	F602-062A*	F602-066A*
Metal Bowl / Sight Gauge		
3/4"	F602-064A*	F602-068A*

F602 Filter Dimensions			
A	B	C	D
3.24 (82)	3.25 (83)	.70 (18)	6.97 (177)
D [†]	E	E [†]	F
7.00 (178)	7.67 (195)	7.70 (196)	2.75 (70)

Inches (mm)
[†] With Automatic Float Drain


Standard part numbers shown bold.
 For other models refer to ordering information below.
[‡] For polycarbonate bowl see Caution on inside cover.
[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

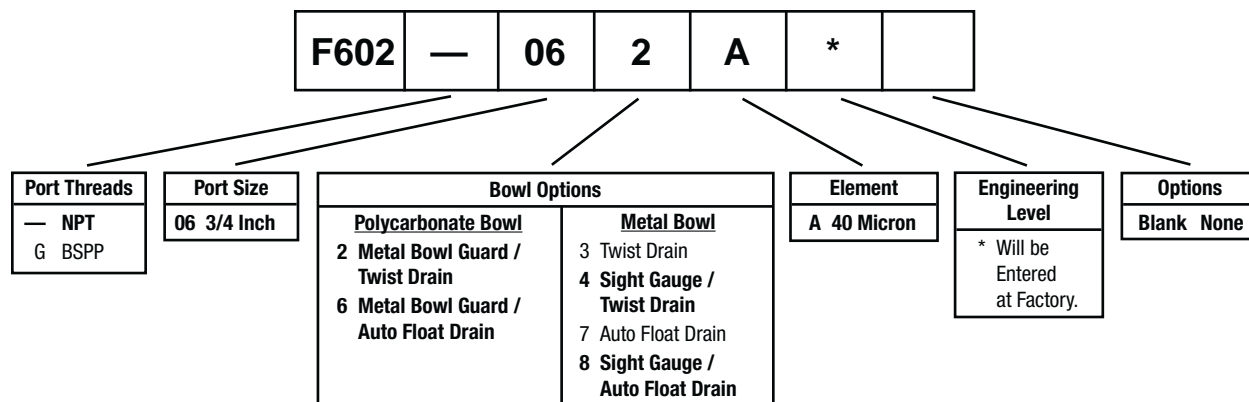

BOLD ITEMS ARE MOST POPULAR.

Technical Information

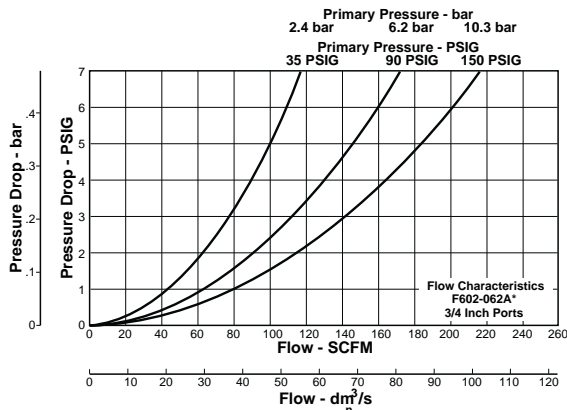

F602 Filter Kits & Accessories

- Bowl Guard Kit**PS805
- Bowl Kits –**
- Poly Bowl –
- Automatic Float Drain..... PS822
- Twist Drain PS832
- Polycarbonate with Plastic Bowl Guard (B) (Old F602)BK602A
- Metal Bowl –
- Automatic Float Drain..... PS826
- Twist Drain PS834
- Sight Gauge / Automatic Drain PS823
- Sight Gauge / Twist Drain..... PS835
- Aluminum (E) (Old F602).....BK603A
- Metal with Sight Gauge (W) (Old F602) BK605WA
- DPI Replacement Kit** PS781
- Drain Kits –**
- Automatic Float Drain..... PS506
- Twist Drain..... PS512
- External Auto (B,W) (Old F602).....SA602D
- External Auto (E) (Old F602).....SA603D
- Internal Auto (All) (Old F602)..... SA602MD
- Manual Twist (All) (Old F602) SA600Y7-1
- Filter Element Kits –**
- 40 Micron PS801
- 5 Micron (B,W) (Old F602)EK602VA
- 40 Micron (B,W) (Old F602)EK602A
- Mounting Bracket Kit**PS843
- Mounting Bracket Kit (Old F602)** (All) SAF602-0572
- Sight Gauge Kit**PS914
- Specifications**
- Bowl Capacity** 7.2 Ounces
- Sump Capacity** 2.8 Ounces
- Port Threads** 1/2, 3/4 Inch

Pressure & Temperature Ratings –


- Without Differential Pressure Indicator:
- Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
- Metal Bowl – 0 to 250 PSIG (0 to 17.2 bar)
 32°F to 175°F (0°C to 80°C)
- With Differential Pressure Indicator: 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
- Automatic Float Drain – 15 to 250 PSIG (1.0 to 17.2 bar)

Weight2.2 lb. (1.0 kg)

Materials of Construction


- Body**.....Zinc
- Bowls**..... Transparent Polycarbonate
- Metal (Zinc) With or Without Sight Gauge
- Bowl Guards** Steel
- Collar**Plastic or Metal
- Deflector, Shroud & Baffle** Plastic
- Drains –**
- Twist Drain – Body & Nut..... Plastic
- Automatic Float Drain –
- Housing, Float Plastic
- Seals.....Nitrile
- Springs, Push Rod Stainless Steel
- Filter Elements –**
- 40 Micron (Standard)..... Plastic
- Adsorber (Optional) Activated Charcoal
- Seals** Nitrile
- Sight Gauge** Nylon

F602 Filters – Hi-Flow



Features

- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard, 5 micron available
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- Large bowl capacity
- Optional high capacity bowl(s) available
- High flow: 3/4" – 270 SCFM[§]
 1" – 300 SCFM[§]

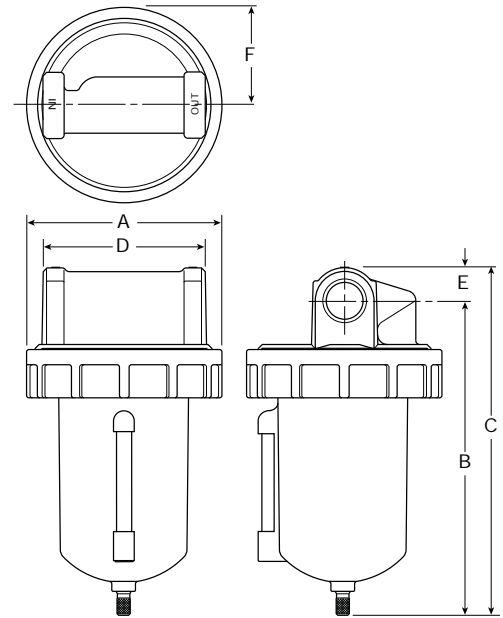

Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Metal Bowl / Sight Gauge - 16 oz.		
3/4"	F602-06WJ	F602-06WJR
1"	F602-08WJ	F602-08WJR
Metal Bowl without Sight Gauge - 32 oz.		
3/4"	F602-06EJ	F602-06EJR
1"	F602-08EJ	F602-08EJR

F602 Filter Dimensions					
A	B	C	D	E	F
F602-06W, F602-08W					
4.90 (124)	7.88 (200)	8.72 (221)	4.06 (103)	.84 (21)	2.45 (62)
F602-06E, F602-08E					
4.90 (124)	11.10 (282)	11.94 (303)	4.06 (103)	.84 (21)	2.45 (62)


inches (mm)

Standard part numbers shown bold.

For other models refer to ordering information below.

§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information



Port Threads
— NPT
G BSPP

Port Size
06 3/4 Inch
08 1 Inch

Bowl
E 32 oz. Large Capacity Metal without Sight Gauge
W 16 oz. Metal with Sight Gauge

Element
G 5 Micron
J 40 Micron



Drains and Options
Blank Manual Twist Drain
Q External Heavy Duty Auto Drain
R Internal Auto Drain

Engineering Level
* Will be Entered at Factory.

BOLD ITEMS ARE MOST POPULAR.




Technical Information

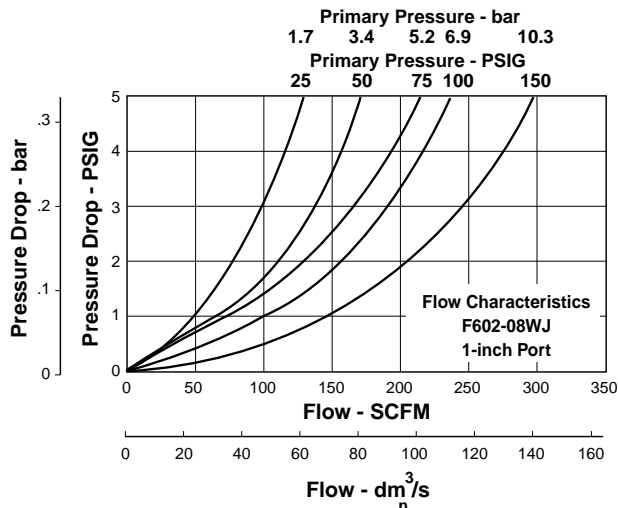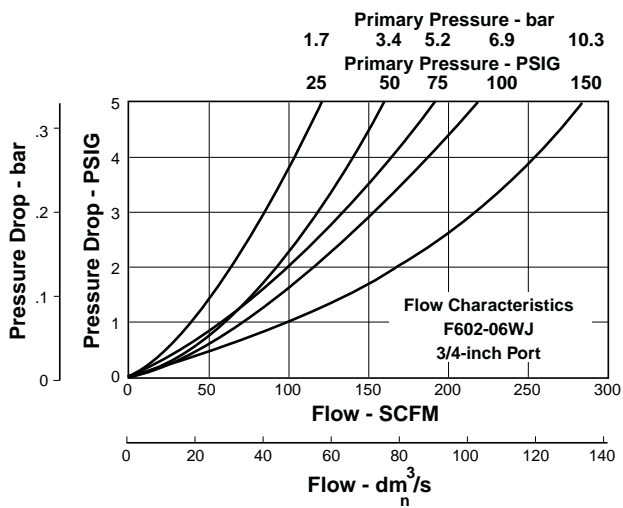

“Q” Option External Heavy Duty Auto Drain
SA602D / SA603D

For heavy duty applications where the filter is being used to remove large volumes of liquid and/or particulate matter from the airstream, the external automatic drain (“Q” option) should be used.



F602 Filter Kits & Accessories

Bowl Kits –

- Aluminum (E) BK603B
- Zinc with Sight Gauge (W)BK605WB

Drain Kits –

- External Auto (E) SA603D
- External Auto (W) SA602D
- Internal Auto (All) SA602MD
- Manual (All) SA600Y7-1
- Semi-Automatic “Overnight” DrainSA602A7
(Drains automatically under zero pressure)

Filter Element Kits –

- 40 Micron (All)EK602B
- 5 Micron (All) EK602VB

Mounting Bracket Kit

(Pair or 2 Kits Pipe Mounted Brackets needed) –

- (3/4" Unit) SA200AW57
- (1" Unit) SA200CW57

Repair Kits –

- Deflector, Baffle Assembly, and Retaining Rod (E,W) RK602B
- External Auto Drain (All) RK602D
- Internal Auto Drain (All) RK602MD
- Metal Bowl Sight Gauge (W) RKB605WB

Specifications

Bowl Capacity –

- Aluminum Bowl (E) 32 Ounces
- Zinc Bowl (W) 16 Ounces

Port Threads 3/4, 1 Inch

() = Bowl Type

Pressure & Temperature Ratings –

- Aluminum Bowl (E) 0 to 300 PSIG (0 to 20.4 bar)
40°F to 150°F (4.4°C to 65.6°C)
- Zinc (W) 0 to 250 PSIG (0 to 17.2 bar)
40°F to 150°F (4.4°C to 65.6°C)
- With Internal Auto Drain (R) 20 to 175 PSIG (1.4 to 11.9 bar)
40°F to 125°F (4.4°C to 52°C)
- With External Auto Drain (Q) 30 to 250 PSIG (0 to 17.2 bar)
40°F to 150°F (4.4°C to 65.6°C)

Weight –

- Aluminum Bowl (E) 7 lb. (3.18 kg) / Unit
28 lb. (12.70 kg) / 4-Unit Master Pack
- Zinc Bowl (W) 6.3 lb. (2.86 kg) / Unit
25 lb. (11.34 kg) / 4-Unit Master Pack

Materials of Construction

BodyZinc

Bowls –

- (E) Aluminum without Sight Gauge
- (W) Zinc with Sight Gauge

Drain –

- Manual Twist & OvernightBrass
- Housing “R”Acetal
- Housing “Q” Bronze

Filter Elements –


- 40 Micron (Standard)Polypropylene
- 5 Micron (Optional)Polypropylene

SealsNitrile

Sight GaugeNylon




F602 Filters – Hi-Flow



Features

- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard, 5 micron available
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- Large bowl capacity
- Optional high capacity bowl(s) available
- High flow: 1-1/4" – 390 SCFM[§]
 1-1/2" – 450 SCFM[§]

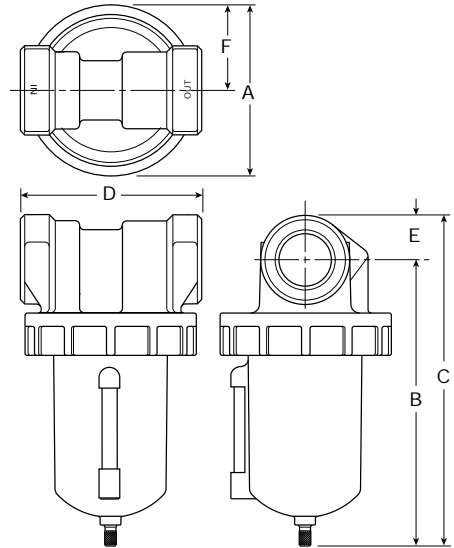


Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Metal Bowl / Sight Gauge - 16 oz.		
1-1/4"	F602-10WJ	F602-10WJR
1-1/2"	F602-12WJ	F602-12WJR
Metal Bowl without Sight Gauge - 32 oz.		
1-1/4"	F602-10EJ	F602-10EJR
1-1/2"	F602-12EJ	F602-12EJR

F602 Filter Dimensions					
A	B	C	D	E	F
F602-10W, F602-12W					
4.90 (124)	8.18 (208)	9.46 (240)	5.19 (132)	1.28 (32.4)	2.45 (62.2)
F602-10E, F602-12E					
4.90 (124)	11.41 (290)	12.69 (322)	5.19 (132)	1.28 (32.4)	2.45 (62.2)

inches (mm)



Standard part numbers shown bold.
 For other models refer to ordering information below.
[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

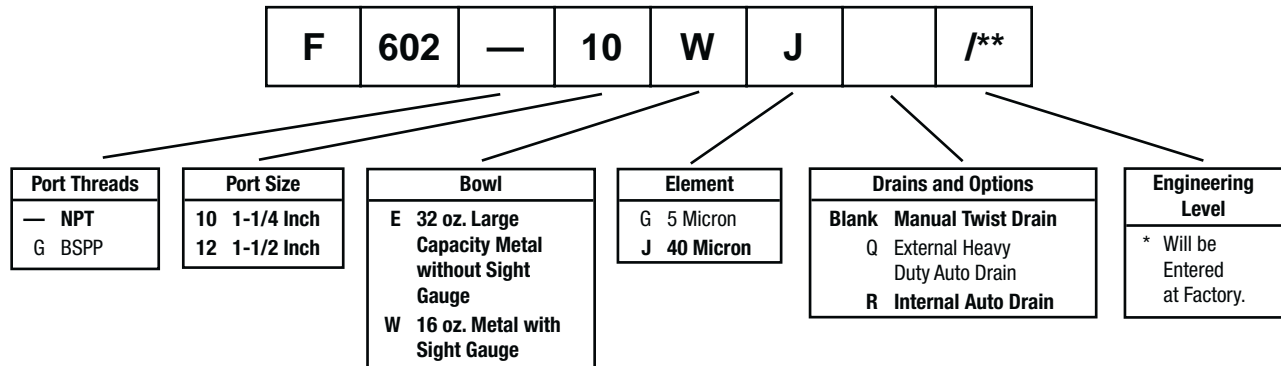


BOLD ITEMS ARE MOST POPULAR.

Technical Information

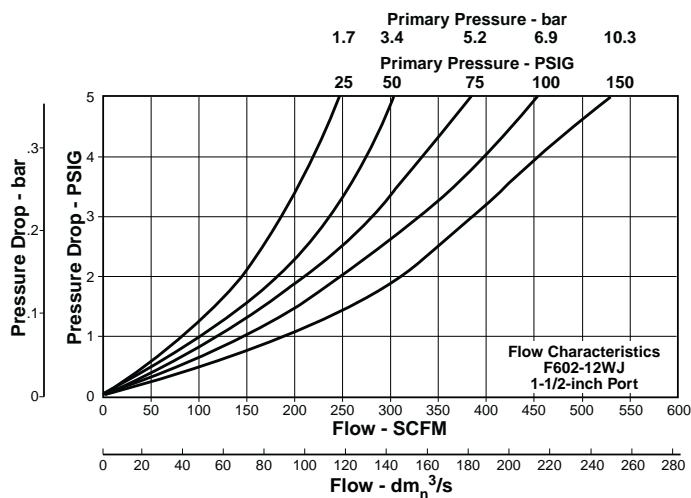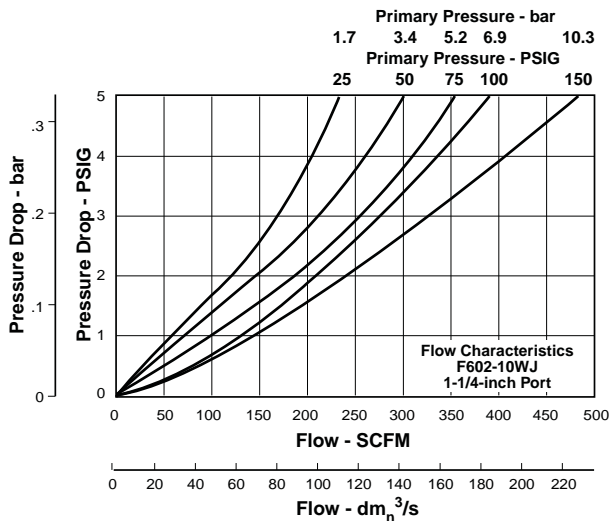

“Q” Option External Heavy Duty Auto Drain
SA602D / SA603D

For heavy duty applications where the filter is being used to remove large volumes of liquid and/or particulate matter from the airstream, the external automatic drain (“Q” option) should be used.



F602 Filter Kits & Accessories

Bowl Kits –

- Aluminum (E) BK603B
- Zinc with Sight Gauge (W) BK605WB

Drain Kits –

- External Auto (E)SA603D
- External Auto (W)SA602D
- Internal Auto (All) SA602MD
- Manual (All) SA600Y7-1
- Semi-Automatic “Overnight” DrainSA602A7
(Drains automatically under zero pressure)

Filter Element Kits –

- 40 Micron (All)EK602B
- 5 Micron (All)EK602VB

Repair Kits –

- Deflector, Baffle Assembly, and Retaining Rod (All) RK602C
- External Auto Drain (All) RK602D
- Internal Auto Drain (All) RK602MD
- Metal Bowl Sight Gauge (W)RKB605WB

Specifications

Bowl Capacity –

- Aluminum (E) 32 Ounces
- Zinc (W) 16 Ounces

Port Threads 1-1/4, 1-1/2 Inch

() = Bowl Type

Pressure & Temperature Ratings –

- Aluminum Bowl (E) 0 to 300 PSIG (0 to 20.4 bar)
40°F to 150°F (4.4°C to 65.6°C)
- Zinc (W) 0 to 250 PSIG (0 to 17.2 bar)
40°F to 150°F (4.4°C to 65.6°C)
- With Internal Auto Drain (R) 20 to 175 PSIG (1.4 to 11.9 bar)
40°F to 125°F (4.4°C to 52°C)
- With External Auto Drain (Q) 30 to 250 PSIG (0 to 17.2 bar)
40°F to 150°F (4.4°C to 65.6°C)

Weight –


- Aluminum Bowl (E) 7.7 lb. (3.49 kg) / Unit
31 lb. (14.06 kg) / 4-Unit Master Pack
- Zinc Bowl (W) 7 lb. (3.18 kg) / Unit
28 lb. (12.70 kg) / 4-Unit Master Pack

Materials of Construction

- BodyZinc
- Bowls –
 - (E) Aluminum without Sight Gauge
 - (W) Zinc with Sight Gauge
- Drain –
 - Manual Twist & Overnight Brass
 - Housing “R” Acetal
 - Housing “Q” Bronze
- Filter Elements –
 - 40 Micron (Standard) Polypropylene
 - 5 Micron (Optional) Polypropylene
- Seals Nitrile
- Sight Gauge Nylon




F602 Filters – Hi-Flow



Features

- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- Large bowl capacity
- Optional high capacity bowl(s) available
- High flow: 2 & 2-1/2" – 1200 SCFM[§]

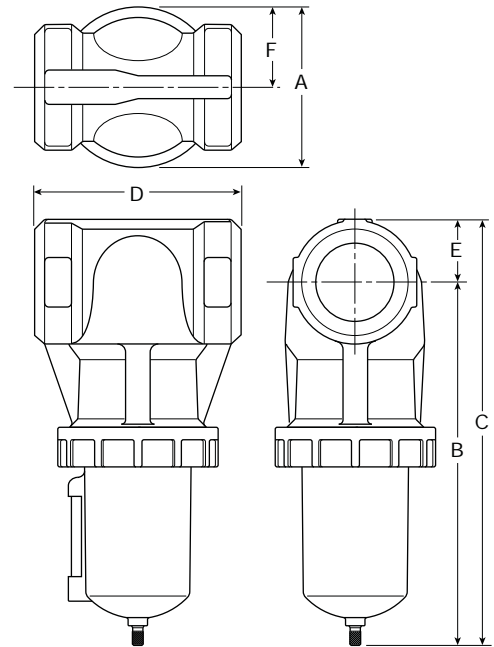

Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Metal Bowl / Sight Gauge - 16 oz.		
2"	F602-16WJ	F602-16WJR
2-1/2"	F602-20WJ	F602-20WJR
Metal Bowl without Sight Gauge - 32 oz.		
2"	F602-16EJ	F602-16EJR
2-1/2"	F602-20EJ	F602-20EJR

F602 Filter Dimensions					
A	B	C	D	E	F
F602-16W, F602-20W					
4.90 (124)	11.08 (281)	13.00 (330)	6.30 (160)	1.92 (48.7)	2.45 (62.2)
F602-16E, F602-20E					
4.90 (124)	14.31 (364)	16.23 (412)	6.30 (160)	1.92 (48.7)	2.45 (62.2)


inches (mm)

Standard part numbers shown bold.

For other models refer to ordering information below.


[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

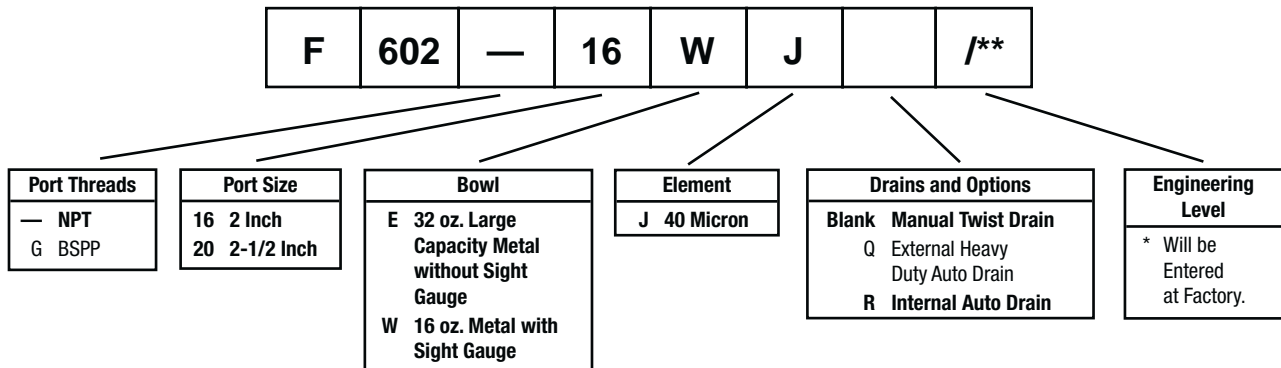


BOLD ITEMS ARE MOST POPULAR.

Technical Information

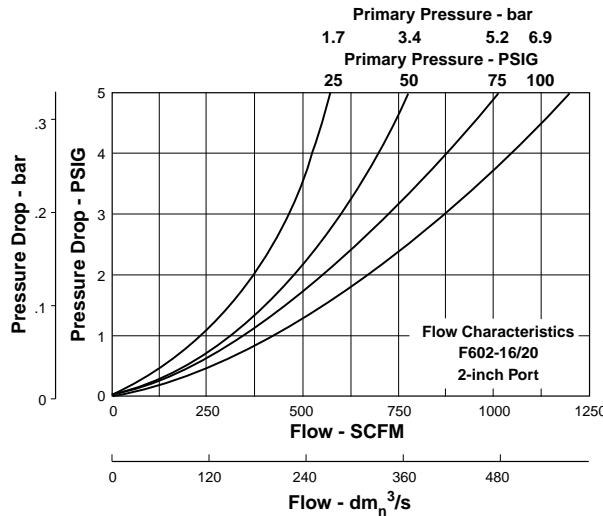

“Q” Option External Heavy Duty Auto Drain SA602D / SA603D

For heavy duty applications where the filter is being used to remove large volumes of liquid and/or particulate matter from the airstream, the external automatic drain (“Q” option) should be used.



F602 Filter Kits & Accessories

Bowl Kits –

- Aluminum (E) BK603B
- Zinc with Sight Gauge (W) BK605WB

Drain Kits –

- External Auto (E) SA603D
- External Auto (W) SA602D
- Internal Auto (All) SA602MD
- Manual (All) SA600Y7-1
- Semi-Automatic “Overnight” Drain SA602A7
 (Drains automatically under zero pressure)

Filter Element Kits –

- 40 Micron (All) EK602B

Repair Kits –

- Deflector, Baffle Assembly, and Retaining Rod (All) RK602C
- External Auto Drain (All) RK602D
- Internal Auto Drain (All) RK602MD
- Metal Bowl Sight Gauge (W) RKB605WB

Specifications

Bowl Capacity –

- Aluminum (E) 32 Ounces
- Zinc (W) 16 Ounces

Port Threads 2, 2-1/2 Inch

() = Bowl Type

Pressure & Temperature Ratings –

- Aluminum Bowl (E) 0 to 300 PSIG (0 to 20.4 bar)
 40°F to 150°F (4.4°C to 65.6°C)
- Zinc (W) 0 to 250 PSIG (0 to 17.2 bar)
 40°F to 150°F (4.4°C to 65.6°C)
- With Internal Auto Drain (R) 20 to 175 PSIG (1.4 to 11.9 bar)
 40°F to 125°F (4.4°C to 52°C)
- With External Auto Drain (Q) 30 to 250 PSIG (0 to 17.2 bar)
 40°F to 150°F (4.4°C to 65.6°C)


Weight –

- Aluminum Bowl (E) 10.3 lb. (4.67 kg) / Unit
 11 lb. (4.99 kg) / 1-Unit Master Pack
- Zinc Bowl (W) 9.8 lb. (4.45 kg) / Unit
 39 lb. (17.69 kg) / 4-Unit Master Pack

Materials of Construction

- Bowl** Aluminum
- Bowls –**
- (E) Aluminum without Sight Gauge
- (W) Zinc with Sight Gauge
- Drain –**
- Manual Twist & Overnight Brass
- Housing “R” Acetal
- Housing “Q” Bronze
- Filter Elements –**
- 40 Micron (Standard) Polypropylene
- Seals** Buna N
- Sight Gauge** Nylon

35F, 43F Filters – Hi-Flow




Auto Drain



Features

- Heavy-duty cast aluminum housings to withstand operating pressures up to 250 PSIG*
- Differential pressure indicator to eliminate the guesswork of element replacement
- Differential pressure gauge available, order separately, Kit DP3-01-000
- Unique drain mounting plate design offers a trouble-free method for interchanging and installing external drains
- High flow: 1-1/2" – 1280 SCFM[§]
 2" – 1400 SCFM[§]
 3" – 2900 SCFM[§]

* Without Differential Pressure Indicator –
 Max. supply pressure is 250 PSIG (20.7 bar).

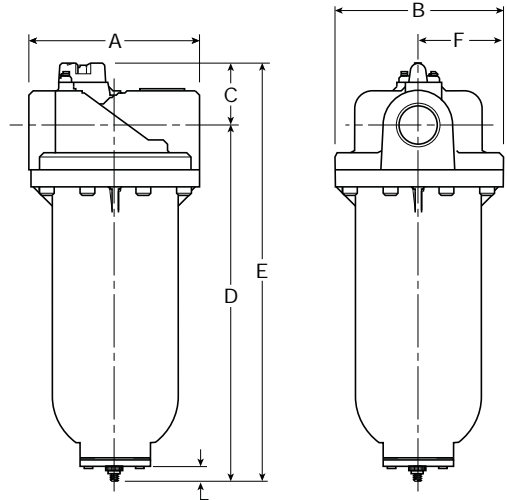


Series	Port Size	Element Type	Part Number (NPT)
			Automatic Drain
35F	1-1/2	5 micron	35F77BAP
	2	5 micron	35F87BAP
43F	3	5 micron	43F7BAP

35F Filter Dimensions						
A	B	C	D	E	F	G
7.80 (198)	7.75 (197)	2.81 (71)	16.24 (412.5)	19.07 (484)	3.88 (98.6)	.55 (14)
43F Filter Dimensions						
A	B	C	D	E	F	G
8.94 (227)	8.88 (225.5)	3.48 (88)	25.96 (659.4)	29.44 (748)	4.44 (112.8)	.55 (14)

Standard part numbers shown bold.
 For other models refer to ordering information below.
[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

inches (mm)

Ordering Information



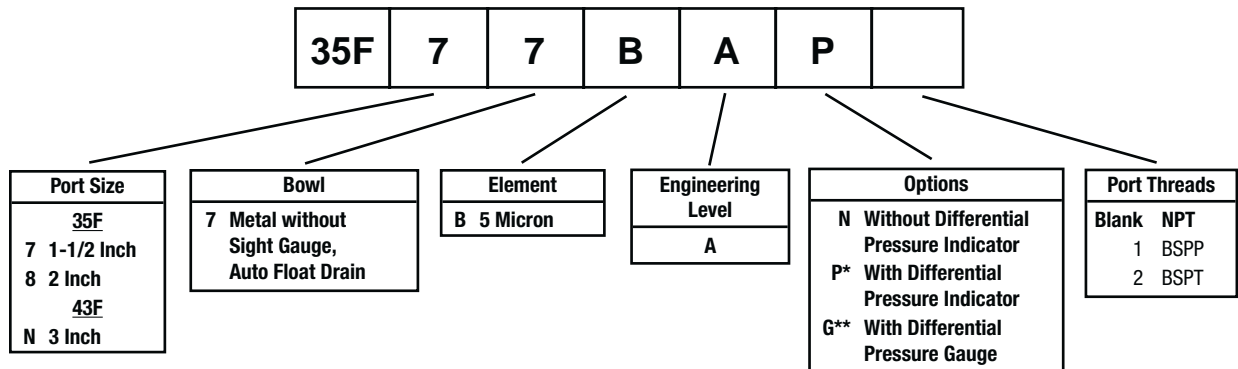


* Max. pressure rating 150 PSIG.
 ** Gauge ships loose.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

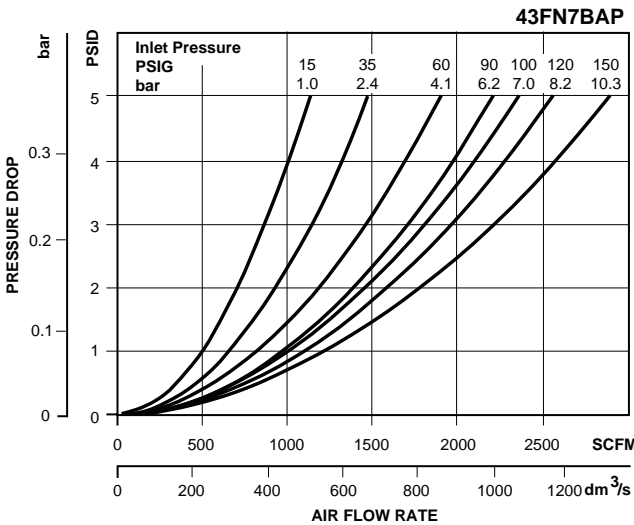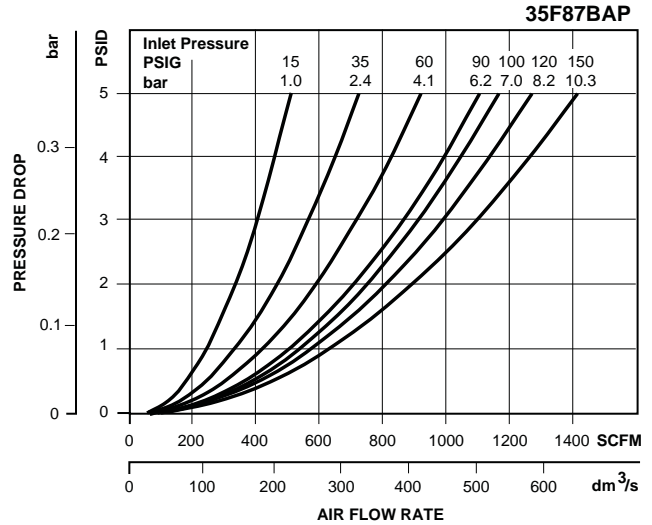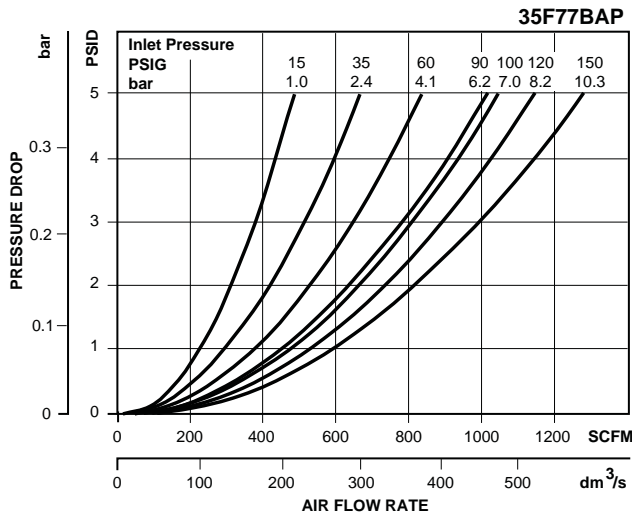

35F & 43F Filter Kits & Accessories

- Differential Pressure Indicator Cap –**
 For pressures over 150 PSIG GRP-95-022
- Differential Pressure Gauge** DP3-01-000
- Differential Pressure Indicator** DP2-02-001
- Drain, Automatic, Internal, Fluorocarbon –**
 1/8 NPT GRP-95-981
- Drain Plate Kit –**
 1/2 NPT Tapped Drain Port GRP-95-393
- Element –**
 35F, 5 Micron FRP-95-505
 43F, 5 Micron FRP-95-508
- Manual Drain Kit**
 with 1/2" Drain Plate GRP-95-392

Specifications

- Maximum Supply Pressure –**
 without DPI and with Pressure Gauge 250 PSIG (17.2 bar)*
 with DPI 150 PSIG (10.3 bar)
- Operating Temperature** 32° to 150°F (0° to 65.5°C)


- Port Size –**
 35F 1-1/2, 2 Inch
 43F 3 Inch
 - Standard Filtration** 5 Micron
 - Weight –**
 35F 19.3 lb. (8.7 kg)
 43F 32.8 lb. (14.9 kg)
- * Without pressure indicator

Materials of Construction

- Baffle** Plated Steel
- Body** Aluminum
- Bowls** Aluminum
- Deflector** Plated Steel
- Element Retainer** Plated Steel
- Filter Element** Polyethylene
- Seals** Fluorocarbon
- Stud** Plated Steel




10F Coalescing Filters – Miniature



Features

- Removes liquid aerosols and sub-micron particles
- Liquids gravitate to the bottom of the element and will not re-enter the airstream
- Oil free air for critical applications, such as air gauging and pneumatic instrumentation and controls
- Interchangeable twist and automatic pulse drains
- Grade 6 element, 99.97% DOP efficiency
- High flow:
 - grade 6 element
 - 1/8" – 17 SCFM[§]
 - 1/4" – 20 SCFM[§]
 - Grade 10 element
 - 1/8" – 19 SCFM[§]
 - 1/4" – 24 SCFM[§]

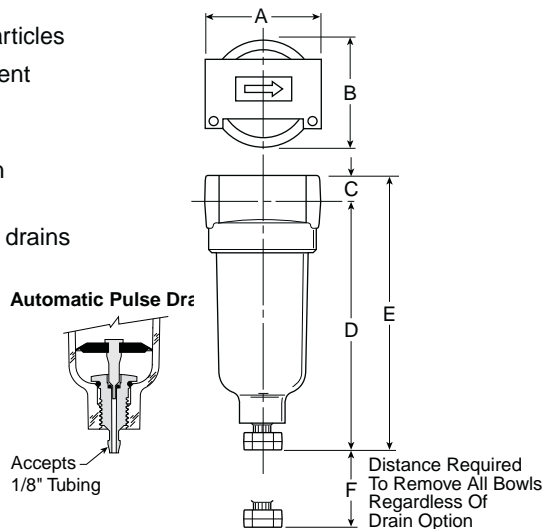

Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Poly Bowl †		
1/8"	10F01E*	10F05E*
1/4"	10F11E*	10F15E*
Metal Bowl without Sight Gauge		
1/8"	10F03E*	10F07E*
1/4"	10F13E*	10F17E*


10F Coalescing Filter Dimensions		
A 1.69 (43)	B 1.56 (39,6)	C .39 (10)
D 3.82 (97)	D† 3.67 (93)	E 4.21 (107)
E† 4.06 (103)	F 1.60 (41)	

Standard part numbers shown bold, with Grade 6 Elements (for Grade 10 Elements, replace "E" with "H" in the 6th position). For other models refer to ordering information below.

† For polycarbonate bowl see Caution on page inside cover.
 § SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Inches (mm)
 † With Automatic Pulse Drain.



Ordering Information

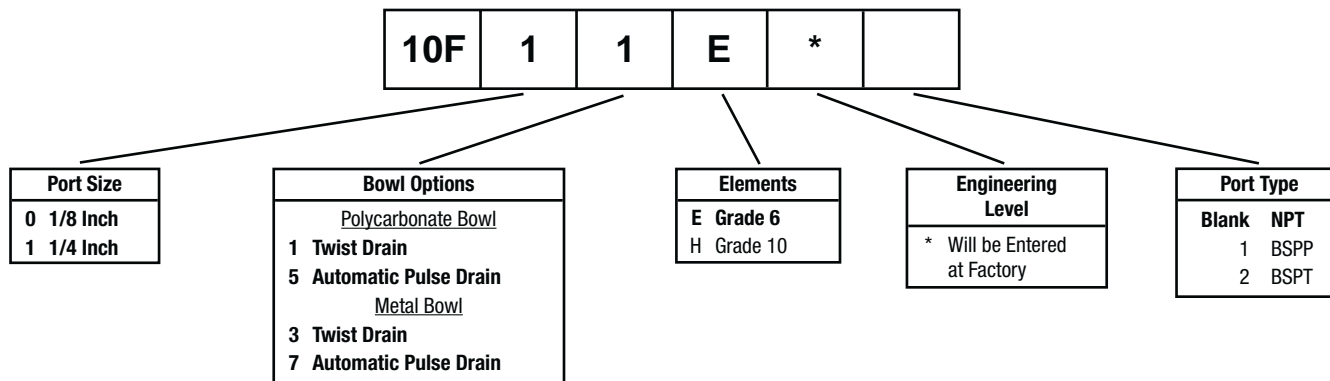



BOLD ITEMS ARE MOST POPULAR.

Technical Information

Grade 6

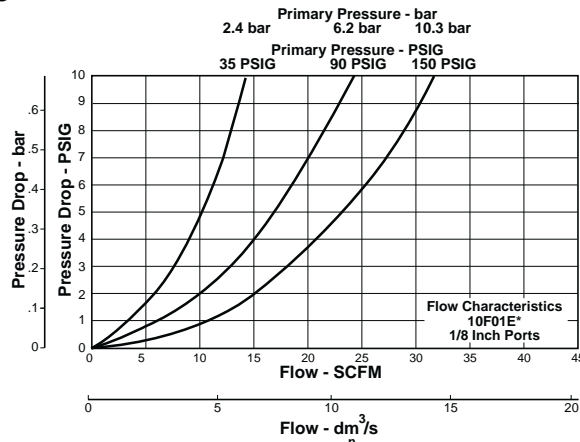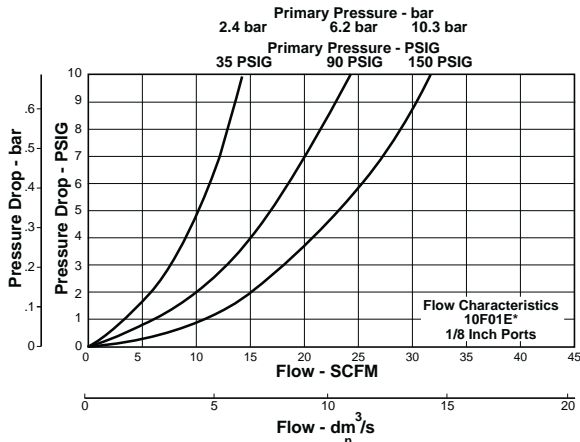

Grade 10

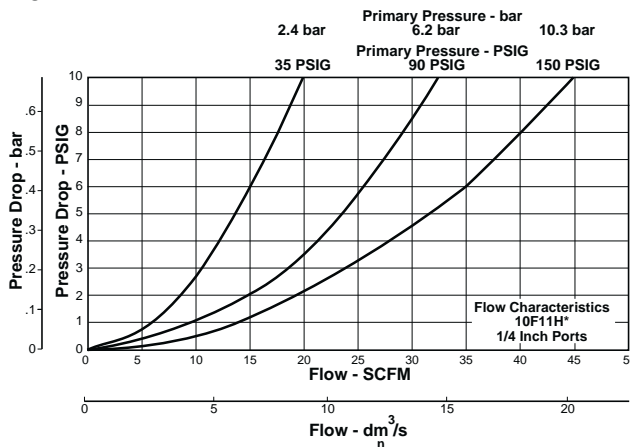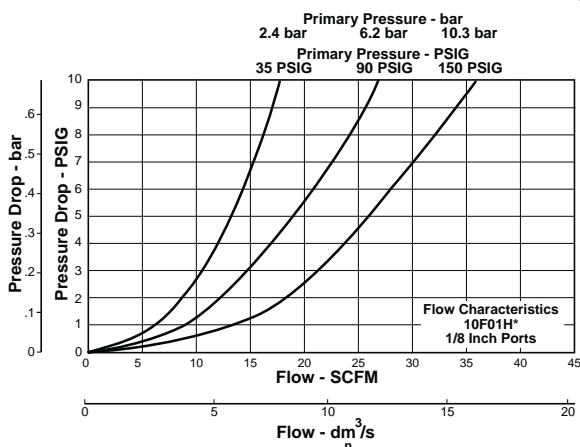

10F Coalescing Filter Kits & Accessories

- Bowl Kits –**
 - Poly Bowl –
 - Automatic Pulse Drain..... PS408B
 - Twist Drain.....PS404
 - Metal Bowl –
 - Automatic Pulse Drain..... PS451B
 - Twist Drain PS447B
- Filter Element Kits –**
 - Grade 6 (Standard).....PS446
 - Grade 10 (Optional).....PS456
- Mounting Bracket Kit** PS417B

Specifications

- Automatic Pulse Drain Tube Barb** 1/8 Inch
- Bowl Capacity**1 Ounce
- Operation –**
 - Normal Operating Pressure Drop2 PSIG
 - Maximum Recommended Pressure Drop..... 10 PSIG
(Element should be replaced)
- Port Threads**..... 1/8, 1/4 Inch
- Pressure & Temperature Ratings –**
 - Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
32°F to 125°F (0°C to 52°C)
 - Metal Bowl –..... 0 to 250 PSIG (0 to 17.2 bar)
32°F to 175°F (0°C to 80°C)
- Weight**..... 0.41 lb. (0.18 kg)

Materials of Construction

- Body** Zinc
- Bowls –**
 - Transparent..... Polycarbonate
 - Metal.....Zinc Without Sight Gauge
- Drains –**
 - Twist Drain –
 - Body & StemPlastic
 - Seals..... Nitrile
 - Automatic Pulse Drain –
 - Piston & Seals Nitrile
 - Stem, Seat, Adaptor & Washers..... Aluminum
- Element Holder**Plastic
- Filter Element**...Borosilicate & felt glass fibers 99.97% DOP efficiency
 - Largest Aerosol Particle Passed (Grade 6)..... 0.75 Micron
 - Largest Solid Particle Passed (Grade 6)..... 0.30 Micron
- Seals** Nitrile


Media Specifications

Grade	D.O.P. Coalescing Efficiency 0.3 to 0.6 Micron Particles	Maximum Oil Carryover ¹ PPM w/w	Pressure Drop (PSID) ² @ Rated Flow		Particulate Micron Rating
			Media Dry	Media Wet With 10-20 wt. oil	
6	99.97%	0.008	1.0	2-3	0.01
10	95%	0.85	0.5	0.5	0.7

¹ Tested per BCAS 860900 at 40 ppm inlet.
² Add dry + wet for total pressure drop.
 D.O.P. = Dioctylphthalate




F501, F507 Coalescing Filters – Miniature



Features

- Removes liquid aerosols and sub-micron particles
- Liquids gravitate to the bottom of the element and will not re-enter the airstream
- Oil free air for critical applications, such as air gauging and pneumatic instrumentation and controls
- Interchangeable twist and automatic pulse drains
- Grade 6 element, 99.97% DOP efficiency
- High flow: Grade 6 element – 8 SCFM[§]
Grade 10 element – 10 SCFM[§]

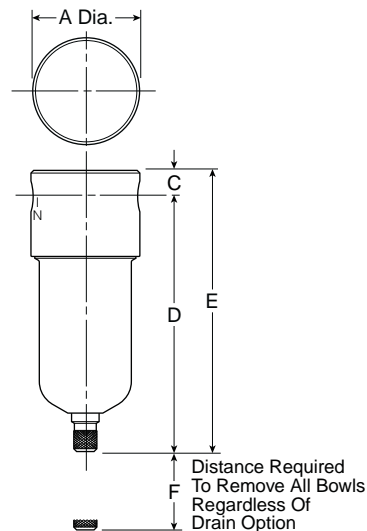

Port Size	NPT	
	Grade 6	Grade 10
Polycarbonate Bowl, Manual Twist Drain †		
1/8"	F501-01AH	F507-01AO
1/4"	F501-02AH	F507-02AO
Metal Bowl without Sight Gauge, Manual Twist Drain		
1/8"	F501-01DH	F507-01DO
1/4"	F501-02DH	F507-02DO

F501 / F507 Coalescing Filter Dimensions		
A 1.56 (39.7)	B .038 (9.5)	D 3.78 (96)
D† 3.62 (92)	E 4.16 (105.6)	E† 4.00 (101.6)
F .75 (77)	F† .75 (77)	

Bold Items are Most Popular.

For other models refer to ordering information below.


† For polycarbonate bowl see Caution on page inside cover.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet and 1.0 PSIG Grade 6, .5 PSIG Grade 10 pressure drop.

Inches (mm)

† With Metal Bowl

Ordering Information



Port Threads
— NPT
G BSPP

Port Size
01 1/8 Inch
02 1/4 Inch

Bowl
A Polycarbonate
D Metal

Elements
F501
H Grade 6
F507
O Grade 10

Drains and Options	
Blank	Manual Twist Drain
S	Automatic Pulse Drain
U	Semi-Auto Drain
X33*	Polyurethane Bowl
X64	Fluorocarbon Seals
X67	With Mounting Bracket

Engineering Change Designer
Will be entered at factory.

* Add .65" to overall length.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

Coalescing Filter Flow Ratings in SCFM

F501 Flow measured at 100 PSIG inlet pressure and 1.0 PSIG pressure drop.

F507 Flow measured at 100 PSIG inlet pressure and 0.5 PSIG pressure drop.

For Inlet Pressures other than 100 PSIG

Inlet Pressure	F501-H	F507-O	Inlet Pressure	F501H	F507-O
10	1.7	2.2	160	12.2	15.2
20	2.4	3.0	170	12.9	16.1
30	3.1	3.9	180	13.6	17.0
40	3.8	4.8	190	14.3	17.8
50	4.5	5.6	200	15.0	18.7
60	5.2	6.5	210	15.7	19.6
70	5.9	7.4	220	16.4	20.5
80	6.6	8.3	230	17.1	21.3
90	7.3	9.1	240	17.8	22.2
100	8.0	10.0	250	18.5	23.1
110	8.7	10.9	260	19.2	23.9
120	9.4	11.7	270	19.9	24.8
130	10.1	12.6	280	20.6	25.7
140	10.8	13.5	290	21.3	26.6
150	11.5	14.4	300	21.9	27.4
Polycarbonate Bowl Limit 150 PSIG			Mini Zinc Bowl Only Limit 300 PSIG		

F501, F507 Filter Kits & Accessories

Bowl Kits –

- Polycarbonate (A) BK504Y
- Metal (D) BK505Y
- Polycarbonate (A) with Automatic Pulse Drain BK504SY
- Metal (D) with Automatic Pulse Drain BK505SY

Drain Kits –

- Manual Twist Drain SA600Y7-1
- Automatic Pulse Drain RK504SY
- Semi-Automatic “Overnight” Drain SA602A7
(Drains automatically under zero pressure)

Filter Element Kits –

- Grade 6 EKF501H
- Grade 10 EKF507

Mounting Bracket Kit Must be Ordered with Filter

Specifications

Bowl Capacity 1 Ounce

Port Threads 1/8, 1/4 Inch

Pressure & Temperature Ratings –

- Polycarbonate Bowl 0 to 150 PSIG (0 to 10.2 bar)
40°F to 125°F (4.4°C to 52°C)
- Metal Bowl 0 to 300 PSIG (0 to 20.4 bar)
40°F to 180°F (4.4°C to 82.2°C)
- With Automatic Pulse Drain 175 PSIG Max. Press. (11.9 bar)

() = BOWL TYPE

Weight

- Polycarbonate Bowl 0.3 lb. (0.14 kg) / Unit
7 lb. (3.18 kg) / 24-Unit Master Pack
- Metal Bowl 0.5 lb. (0.23 kg) / Unit
12 lb. (5.44 kg) / 24-Unit Master Pack

Materials of Construction

- Body** Aluminum
- Bowls** Polycarbonate
Metal (Zinc)
- Drains** Brass
- Filter Elements** Borosilicate Fibers & Felt
- End Caps** Urethane
- Seals** Nitrile

Media Specifications

Grade	D.O.P. Coalescing Efficiency 0.3 to 0.6 Micron Particles	Maximum Oil Carryover ¹ PPM w/w	Pressure Drop (PSID) ² @ Rated Flow		Particulate Micron Rating
			Media Dry	Media Wet With 10-20 wt. oil	
6	99.97%	0.008	1.0	2-3	0.01
10	95%	0.85	0.5	0.5	0.7

¹ Tested per BCAS 860900 at 40 ppm inlet.

² Add dry + wet for total pressure drop.

D.O.P. = Dioctylphthalate




F701 Coalescing Filters – Compact



Features

- Removes liquid aerosols and sub-micron particles
- Liquids gravitate to the bottom of the element and will not re-enter the airstream
- Oil free air for critical applications, such as air gauging and pneumatic instrumentation and controls
- Interchangeable twist and automatic float drains
- Differential pressure indicator standard
- Shown with recommended metal bowl guard
- High flow:

Grade 6 element	Grade 10 element
1/4" – 45 SCFM [§]	1/4" – 60 SCFM [§]
3/8" – 48 SCFM [§]	3/8" – 72 SCFM [§]
1/2" – 65 SCFM [§]	1/2" – 95 SCFM [§]

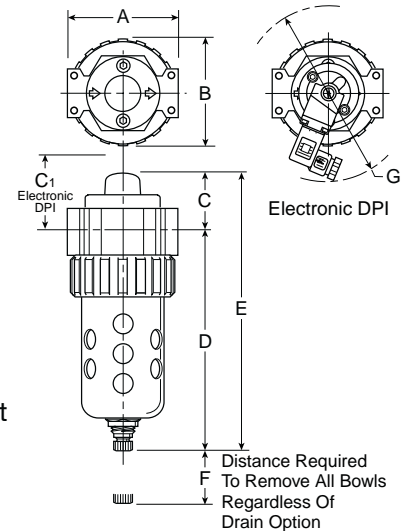

Port Size	NPT	
	Twist Drain	Automatic Float Drain
Poly Bowl † / Metal Guard		
1/4"	F701-022E*	F701-026E*
3/8"	F701-032E*	F701-036E*
1/2"	F701-042E*	F701-046E*
Metal Bowl / Sight Gauge		
1/4"	F701-024E*	F701-028E*
3/8"	F701-034E*	F701-038E*
1/2"	F701-044E*	F701-048E*

F701 Coalescing Filter Dimensions			
A	B	C	C1
2.81 (71)	2.74 (70)	1.46 (37)	1.81 (46)
D	D†	E	E†
5.69 (145)	5.74 (146)	7.15 (182)	7.20 (183)
F	G Dia.		
2.25 (57)	4.50 (114)		

Inches (mm)


† With Automatic Float Drain

Standard part numbers shown bold, with Grade 6 Elements (for Grade 10 Elements, replace "E" with "H" in the 6th position). For other models refer to ordering information below.

† For polycarbonate bowl see Caution on inside cover.

§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information






Port Threads — NPT G* BSPP <small>* 1/4 & 3/8 inch meet ISO 1179-1 Standard.</small>	Port Size 02 1/4 Inch 03 3/8 Inch 04 1/2 Inch	Bowl Options <table border="0"> <tr> <td><u>Polycarbonate Bowl</u></td> <td><u>Metal Bowl</u></td> </tr> <tr> <td>2 Metal Bowl Guard / Twist Drain</td> <td>3 Twist Drain</td> </tr> <tr> <td>6 Metal Bowl Guard / Auto Float Drain</td> <td>4 Sight Gauge / Twist Drain</td> </tr> <tr> <td></td> <td>7 Auto Float Drain</td> </tr> <tr> <td></td> <td>8 Sight Gauge / Auto Float Drain</td> </tr> </table>	<u>Polycarbonate Bowl</u>	<u>Metal Bowl</u>	2 Metal Bowl Guard / Twist Drain	3 Twist Drain	6 Metal Bowl Guard / Auto Float Drain	4 Sight Gauge / Twist Drain		7 Auto Float Drain		8 Sight Gauge / Auto Float Drain	Element E Grade 6 (.01 Micron) H Grade 10 (1.0 Micron)	Engineering Level * Will be Entered at Factory.	Options Blank With Differential Pressure Indicator N Without Differential Pressure Indicator
<u>Polycarbonate Bowl</u>	<u>Metal Bowl</u>														
2 Metal Bowl Guard / Twist Drain	3 Twist Drain														
6 Metal Bowl Guard / Auto Float Drain	4 Sight Gauge / Twist Drain														
	7 Auto Float Drain														
	8 Sight Gauge / Auto Float Drain														

BOLD ITEMS ARE MOST POPULAR.






Technical Information

Grade 6

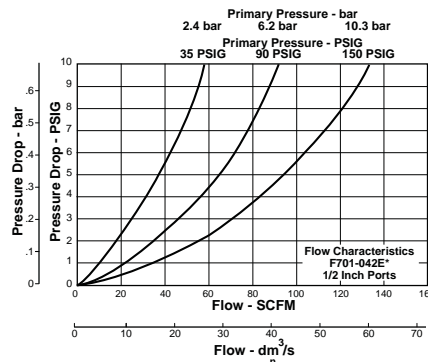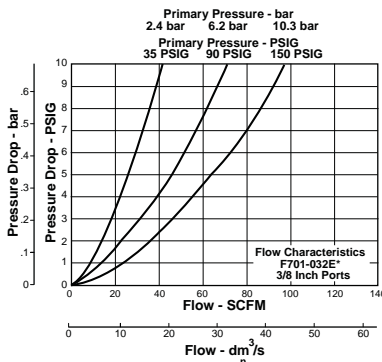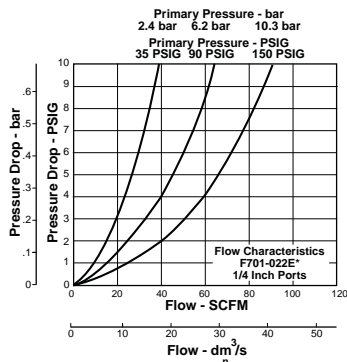

Grade 10

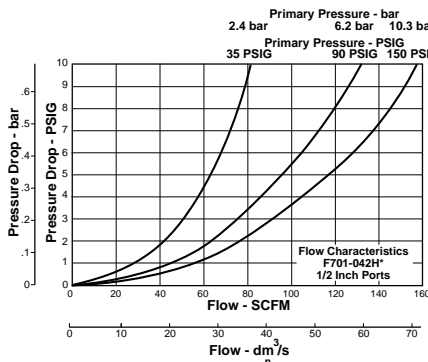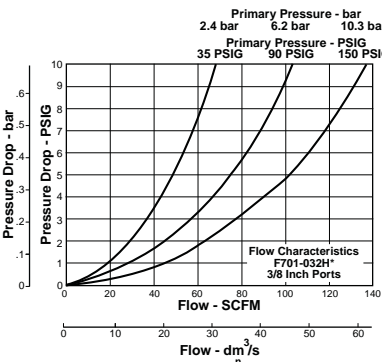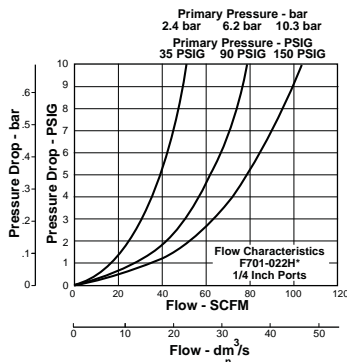

F701 Coalescing Filter Kits & Accessories

- Bowl Guard Kit** PS705
- Bowl Kits –**
- Poly Bowl – Automatic Float Drain PS722
- Twist Drain PS732
- Metal Bowl – Automatic Float Drain PS726
- Twist Drain PS734
- Sight Gauge / Automatic Float Drain PS723
- Sight Gauge / Twist Drain PS735
- 1/4, 3/8, 1/2 Inch (W) (Old F701) BK605WA
- 1/4, 3/8, 1/2 Inch (E) (Old F701) BK603A
- DPI Replacement Kit** PS781
- Differential Pressure Pop Up Indicator Repair Kit** RK701P
 (only works with originally equipped 701 units)
- Differential Pressure Gauge** DP276-P
 (only works on units without pop-up indicator)
- Drain Kits –**
- Automatic Float Drain PS506
- Twist Drain PS512
- Internal Automatic Drain - High Pressure (T) (Old F701) SA702MD
- Manual Twist Drain (Old F701) SA600Y7-1
- Filter Element Kits –**
- Grade 6 (Standard) PS724
- 1/4, 3/8, 1/2 Inch (W) (Old F701) F701-C3-0771
- 1/4, 3/8, 1/2 Inch (E) (Old F701) F701-C3-0772
- Grade 10 (Optional) PS730
- 1/4, 3/8, 1/2 Inch (W) (Old F701) F701-C7-0771
- 1/4, 3/8, 1/2 Inch (E) (Old F701) F701-C7-0772
- Mounting Bracket Kit** PS743
- 1/4, 3/8, 1/2 (Mounts to Filter Head) (Old F701) SAF602-0572
- Sight Gauge Kit** PS914

- Sump Capacity** 1.75 Ounces
- Operation –**
- Normal Operating Pressure Drop 2 PSIG
- Maximum Recommended Pressure Drop 10 PSIG
 (Element should be replaced)
- Minimum Recommended Flow –
 20% Nominal Rating of Element

Port Threads 1/4, 3/8, 1/2 Inch

- Pressure & Temperature Ratings –**
- Without Differential Pressure Indicator:
- Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
- Metal Bowl – 0 to 250 PSIG (0 to 17.2 bar)
 32°F to 175°F (0°C to 80°C)
- With Differential Pressure Indicator: 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
- Automatic Float Drain – 15 to 250 PSIG (1.0 to 17.2 bar)

Weight 1.5 lb (0.7 kg)

Materials of Construction

- Body** Zinc
- Bowls** Transparent Polycarbonate
 Metal (Zinc) With or Without Sight Gauge
- Bowl Guard** Steel
- Collar** Plastic
- Drains –** Twist Drain – Body & Nut Plastic
- Automatic Float Drain – Housing, Float Plastic
 Seals Nitrile
 Springs, Push Rod Stainless Steel

- Filter Element –**
- Borosilicate & Felt Glass Fibers 99.97% DOP Efficiency
- Largest Aerosol Particle Passed (Grade 6) 0.01 Micron
- Largest Solid Particle Passed (Grade 6) 0.30 Micron
- Seals** Nitrile
- Sight Gauge** Nylon

Specifications

Bowl Capacity 4.4 Ounces




F701 Coalescing Filters – Standard



Features

- Removes liquid aerosols and sub-micron particles
- Liquids gravitate to the bottom of the element and will not re-enter the airstream
- Oil free air for critical applications, such as air gauging and pneumatic instrumentation and controls
- Interchangeable twist and automatic float drains
- Differential pressure indicator standard
- Shown with recommended metal bowl guard
- High flow: Grade 6 element Grade 10 element
 3/4" – 80 SCFM[§] 3/4" – 160 SCFM[§]

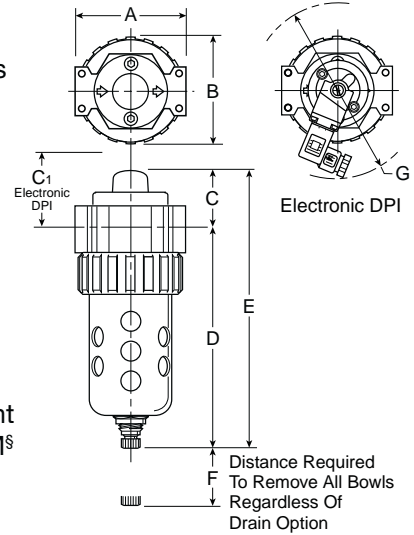

Port Size	NPT	
	Twist Drain	Automatic Float Drain
Poly Bowl ‡ / Metal Guard		
3/4"	F701-062E*	F701-066E*
Metal Bowl / Sight Gauge		
3/4"	F701-064E*	F701-068E*

F701 Coalescing Filter Dimensions			
A 3.24 (82)	B 3.25 (83)	C 1.63 (41)	C1 2.00 (51)
D 6.97 (177)	D† 7.00 (178)	E 8.60 (218)	E† 8.63 (219)
F 2.75 (70)	G Dia. 4.50 (114)		

Standard part numbers shown bold, with Grade 6 Elements (for Grade 10 Elements, replace "E" with "H" in the 6th position). For other models refer to ordering information below.


‡ For polycarbonate bowl see Caution on inside cover.

§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Inches (mm)

† With Automatic Float Drain


Ordering Information

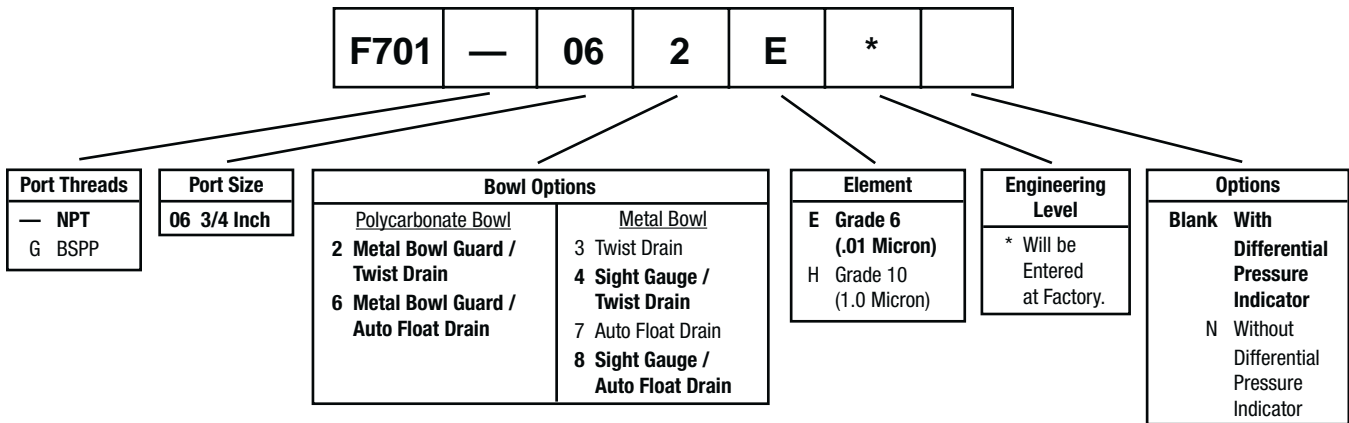


BOLD ITEMS ARE MOST POPULAR.

Technical Information

Grade 6

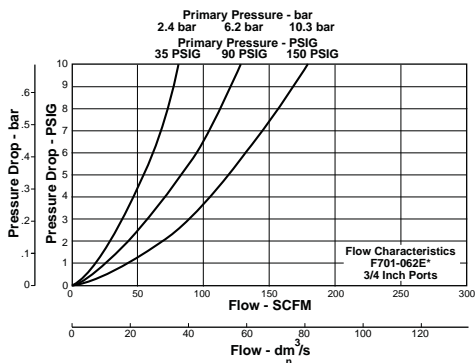

Grade 10

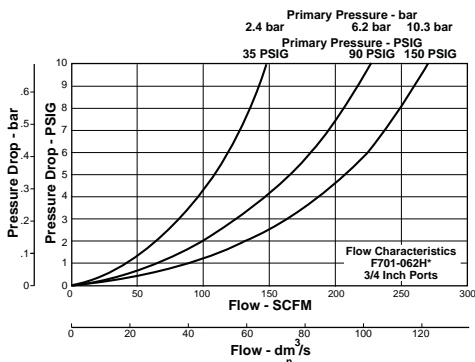

F701 Coalescing Filter Kits & Accessories

- Bowl Guard Kit PS805
- Bowl Kits –
 - Poly Bowl – Automatic Float Drain..... PS822
 - Twist Drain PS832
 - Metal Bowl – Automatic Float Drain..... PS826
 - Twist Drain PS834
 - Sight Gauge / Automatic Float Drain..... PS823
 - Sight Gauge / Twist Drain..... PS835
- DPI Replacement Kit PS781
- Drain Kits –
 - Automatic Float Drain..... PS506
 - Twist Drain..... PS512
 - Manual Twist Drain SA600Y7-1
- Filter Element Kits –
 - Grade 6 (Standard) PS824
 - Grade 10 (Optional) PS830
- Mounting Bracket Kit PS843
- Sight Gauge Kit PS914
- Specifications
- Bowl Capacity 7.2 Ounces
- Sump Capacity 2.8 Ounces
- Operation – Normal Operating Pressure Drop 2 PSIG
- Maximum Recommended Pressure Drop 10 PSIG (Element should be replaced)
- Minimum Recommended Flow – 20% Nominal Rating of Element
- Port Threads 1/2 & 3/4 Inch

Pressure & Temperature Ratings –

Without Differential Pressure Indicator:

Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
32°F to 125°F (0°C to 52°C)

Metal Bowl – 0 to 250 PSIG (0 to 17.2 bar)
32°F to 175°F (0°C to 80°C)

With Differential Pressure Indicator: 0 to 150 PSIG (0 to 10.3 bar)
32°F to 125°F (0°C to 52°C)

Automatic Float Drain – 15 to 250 PSIG (1.0 to 17.2 bar)

Weight 2.4 lb. (1.1 kg)

Materials of Construction

- Body Zinc
- Bowls Transparent Polycarbonate
- Metal (Zinc) With or Without Sight Gauge
- Bowl Guard Steel
- Collar Plastic or Metal
- Drains – Twist Drain – Body & Nut..... Plastic
- Automatic Float Drain – Housing, Float Plastic
- Seals Nitrile
- Springs, Push Rod Stainless Steel

Filter Element –


- Borosilicate & Felt Glass Fibers 99.97% DOP Efficiency
- Largest Aerosol Particle Passed (Grade 6) 0.01 Micron
- Largest Solid Particle Passed (Grade 6) 0.30 Micron

Seals Nitrile

Sight Gauge Nylon




F701 Coalescing Filters – Hi-Flow



Features

- Removes liquid aerosols and sub-micron particles
- Protects pneumatic systems from contamination that standard particulate filters will not catch
- Two different grade elements available
- Differential pressure pop-up indicator standard
- Differential pressure gauge optional
- High flow design

Note: All coalescing filters should be protected by a particulate filter (i.e., F602, or other) installed upstream.

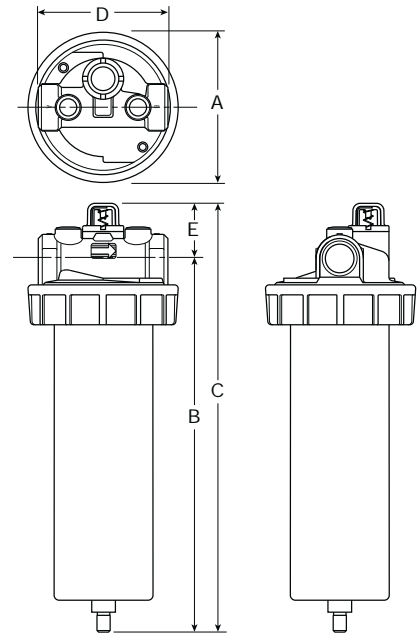

Port Size	Grade 6		Grade 10	
	Flow (SCFM)*	Part Number	Flow (SCFM)*	Part Number
3/4"	95	F701-06E3P	158	F701-06E7P
3/4"	170	F701-06L3P	285	F701-06L7P
1"	95	F701-08E3P	158	F701-08E7P
1"	170	F701-08L3P	285	F701-08L7P

F701 Coalescing Filter Dimensions						
Port Size	Bowl Capacity	A	B	C	D	E
3/4 & 1 Inch (E)	32 oz.	4.95 (126)	11.77 (299)	13 (330)	4.00 (101)	1.23 (31)
3/4 & 1 Inch (L)	100 oz.	4.95 (126)	21.39 (543)	22.63 (575)	4.00 (101)	1.23 (31)

* Dry media flow. For wet media info see table to right

"G" Differential Pressure Gauge add 2.00(50.8) to C & E.

"Q" External Auto Drain add 1.70 (43.1) to B & C.

inches (mm)

Ordering Information



Port Threads — NPT G BSPP	Port Size 06 3/4 Inch 08 1 Inch	Bowl E Metal without Sight Gauge L Metal without Sight Gauge 100 oz.	Element 3 Grade 6 7 Grade 10	Element Service Indicator Blank None P Pop-up Style G Differential Pressure Gauge	Bowl Drains Blank Manual Twist Drain T Internal Automatic Drain Q External Auto Drain	Engineering Level * Will be Entered at Factory
--	--	--	---	---	---	--

BOLD ITEMS ARE MOST POPULAR.



Element Selection

Element Grade	Applications
6	General air coalescing applications when total removal of liquid aerosols and suspended fines is required in all pressure ranges. Protection of air dryers, air gauging, air logic, modulating systems, critical air conveying, most breathing air systems, etc.
10	Precoalescer or prefilter for Grade 6 to remove gross amounts of water and oil, or tenacious aerosols which are difficult to remove. Upgrading existing particulate equipment to coalescing without increase in pressure drop.


Media Specifications

Grade	D.O.P. Coalescing Efficiency 0.3 to 0.6 Micron Particles	Maximum Oil Carryover ¹ PPM w/w	Pressure Drop (PSID) ² @ Rated Flow		Flow: SCFM @ 1 PSID Operating Pressure 100 PSIG
			Media Dry	Media Wet With 10-20 wt. oil	
6	99.97%	0.008	1.0	2-3	3.5 SCFM
10	95%	0.85	0.5	0.5	5.3 SCFM

¹ Tested per BCAS 860900 at 40 ppm inlet.

² Add dry + wet for total pressure drop.

D.O.P. = Dioctylphthalate

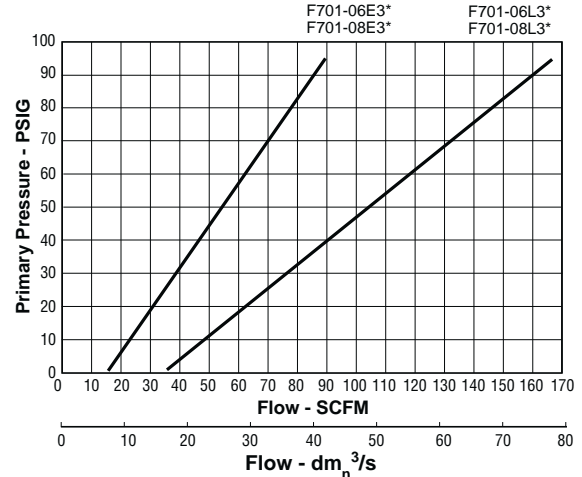

F701 Filter Kits & Accessories

Mounting Brackets –

Port Size

- 3/4 Inch (Pair of Pipe Mounted Brackets)SA200AW57
- 1 Inch (Pair of Pipe Mounted Brackets)..... SA200CW57

Bowl Kits –

Port Size

- 3/4, 1 Inch (E) BK603B
- 3/4, 1 Inch (L)..... BK603C

Differential Pressure Pop Up Indicator Repair KitRK701P
(only works with originally equipped units)

Differential Pressure Gauge DP276-P
(only works on units without pop-up indicator)

Drain Kits –

- Internal Automatic Drain - High Pressure (T)..... SA702MD
- Manual Twist Drain SA600Y7-1

Filter Element Kits –

Port Size - Grade 6

- 3/4, 1 Inch (E) F701-C3-0773
- 3/4, 1 Inch (L)..... F701-C3-0774

Port Size - Grade 10

- 3/4, 1 Inch (E) F701-C7-0773
- 3/4, 1 Inch (L)..... F701-C7-0774

Specifications

Operation –

- Maximum Recommended Pressure Drop 10 PSIG
(element should be replaced)
- Normal Operating Pressure Drop (Dry)..... 2 PSIG
- Normal Operating Pressure Drop (Wet)..... 5 PSIG

() = Bowl Type

Minimum Recommended Flow 20% of Rated Flow

Maximum Pressure (Manual Drains) 0 to 300 PSIG (0-20 bar)

Maximum Pressure Automatic Drains) –

- “R” Drain..... 175 PSIG (12 bar)
- “T” Drain 250 PSIG (17 bar)
- “Q” Drain 250 PSIG (17 bar)

Maximum Temperature 32°F to 150°F (0°C to 65°C)
Maximum temperature with “T”, “R”, or “Q” Drains ... 125°F (52°C)

Weight –

- 3/4 & 1 Inch (E) 32 oz. 5 lb.
- 3/4 & 1 Inch (L) 100 oz..... 8 lb.

Materials of Construction

Body & Flange Ring Zinc

Bowl –

Metal Bowl (E) (L)..... Aluminum

Drains –

- Automatic Float Drain –
- Housing “R”, “T” Acetal
- Housing “Q” Bronze
- Manual Twist Drain Brass

Seals & Float Buna N

Springs Stainless Steel


Elements (Media) Borosilicate Fibers & Felt

Element End Caps Urethane

Seals Buna N



35F, 43F Coalescing Filters – Hi-Flow




Auto Drain



Features

- Heavy-duty cast aluminum housings to withstand operating pressures up to 250 PSIG*
- Differential pressure indicator to eliminate the guesswork of element replacement
- Differential pressure gauge available, order separately, Kit DP3-01-000
- Unique drain mounting plate design offers a trouble-free method for interchanging and installing external drains
- High-flow filter elements: coalescing, 1 micron and 0.01 Micron
- High flow: 1-1/2" – 710 SCFM[§]
 2" – 710 SCFM[§]
 3" – 1770 SCFM[§]

* Without Differential Pressure Indicator –
 Max. supply pressure is 250 PSIG (20.7 bar).

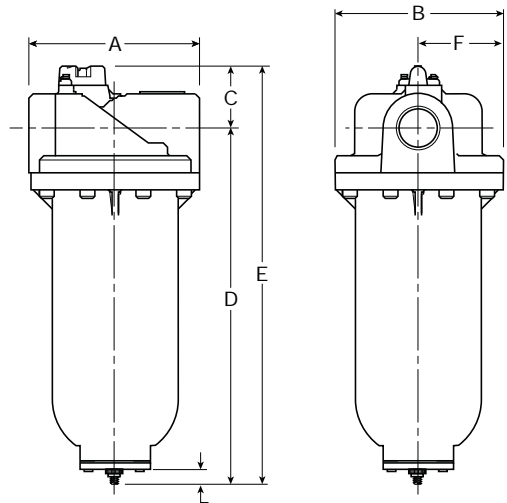

Series	Port size	Element type	Part number (NPT)
			Automatic drain
35F	1-1/2	0.01 micron	35F77EAP
	1-1/2	1.0 micron	35F77HAP
	1-1/2	Adsorber	35F77ZAP
	2	0.01 micron	35F87EAP
	2	1.0 micron	35F87HAP
	2	Adsorber	35F87ZAP
43F	3	0.01 micron	43FN7EAP
	3	1.0 micron	43FN7HAP
	3	Adsorber	43FN7ZAP

35F Coalescing Filter Dimensions						
A	B	C	D	E	F	G
7.80 (198)	7.76 (197)	2.83 (72)	16.24 (412.5)	19.07 (484)	3.88 (98.6)	.55 (14)
43F Coalescing Filter Dimensions						
A	B	C	D	E	F	G
8.94 (227)	8.88 (225.5)	3.48 (88)	25.96 (659.4)	29.44 (748)	4.44 (112.8)	.55 (14)


inches (mm)

Standard part numbers shown bold.

For other models refer to ordering information below.

[§] SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

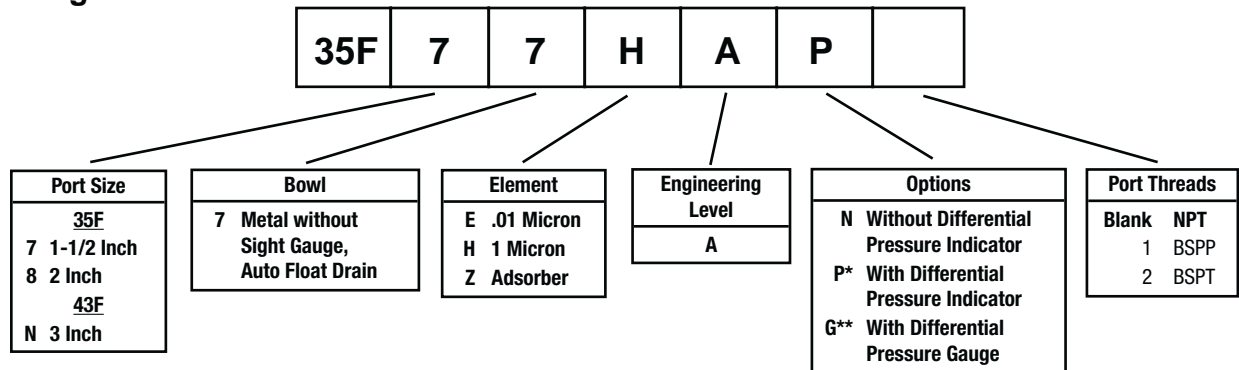




* Max. pressure rating 150 PSIG.

** Gauge ships loose.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

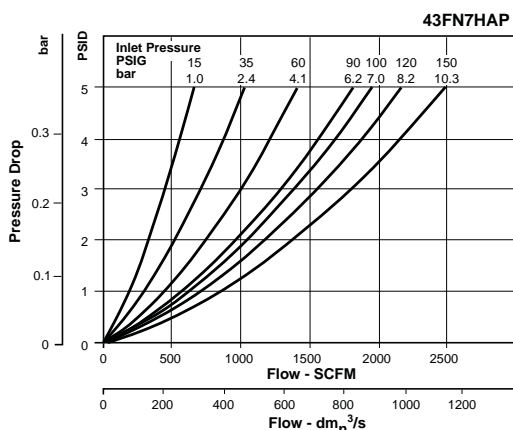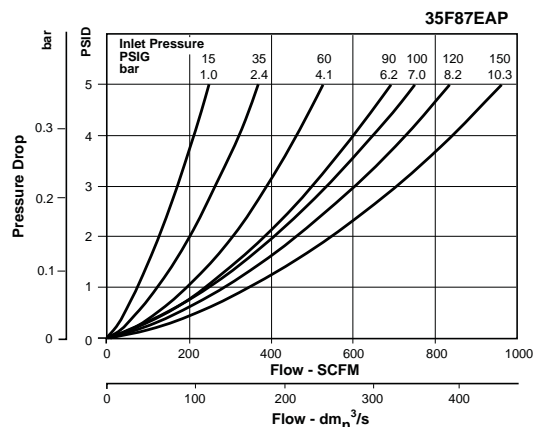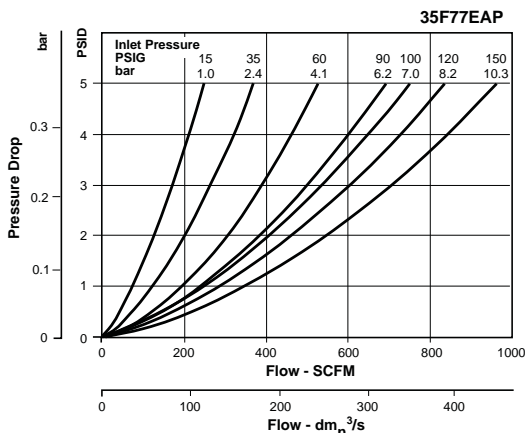

35F & 43F Coalescing Filter Kits & Accessories

- Differential Pressure Indicator Cap –**
 For pressures over 150 PSIG GRP-95-022
- Differential Pressure Gauge** DP3-01-000
- Differential Pressure Indicator** DP2-02-001
- Drain, Automatic, Internal, Fluorocarbon –**
 1/8 NPT GRP-95-981
- Drain Plate Kit –**
 1/2 NPT Tapped Drain Port GRP-95-393
- Element –**
 35F: 0.01 Micron MTP-95-502
 35F: 1.0 Micron MSP-95-502
 35F: Adsorber MXP-95-502
 43F: 0.01 Micron MTP-95-562
 43F: 1.0 Micron MSP-95-876
 43F: Adsorber MXP-95-565
- Manual Drain Kit**
 with 1/2" Drain Plate GRP-95-392

Specifications

- Maximum Supply Pressure –**
 without DPI and with Pressure Gauge 250 PSIG (17.2 bar)*
 with DPI 150 PSIG (10.3 bar)
- Operating Temperature** 32° to 150°F (0° to 65.5°C)
- Port Size –**
 35F 1-1/2, 2 Inch
 43F 3 Inch
- Standard Filtration* –** Micron 1.0, 0.01
 Adsorber Activated carbon
- Weight –**
 35F 19.3 lb. (8.7 kg)
 43F 32.8 lb. (14.9 kg)

* Filtration temperature of 70°F (21°C) @100 PSIG (6.9 bar) with typical compressor lubricating oil and protected by 0.01 micron filter.

Materials of Construction

- Body** Aluminum
- Bowls** Aluminum
- Filter Element –** 0.01 & 1.0 Micron Borosilicate Cloth
 Adsorber Activated Carbon
- Seals** Fluorocarbon
- Stud** Plated Steel
- Seals** Fluorocarbon
- Stud** Plated Steel



Bulk Liquid Separators – P3TF



P3TFA98WEAN


Features

- Tested in Accordance with ISO 8573.9.
- High Liquid Removal Efficiencies at All Flow Conditions.
- Low Pressure Losses for Low Operational Costs.
- Multiple Port Sizes for a Given Flow Rate Provides Increased Flexibility During Installation.
- Suitable for Variable Flow Compressors.
- Works with All Types of Compressor and Compressor Condensate.
- Low Maintenance.
- Lightweight Cast Aluminum Housing with 1/4" to 3" Ports.
- External Surface Epoxy Painted for Maximum Corrosion Resistance.


Applications

- Bulk Liquid Removal at Any Point in a Compressed Air System
- Protection of Refrigeration and Heatless Regenerative Desiccant Dryers
- Liquid Removal from Compressor Inter-coolers / After-coolers
- Liquid Separation Within Refrigeration Dryers
- Pre-Filtration

Ordering Information

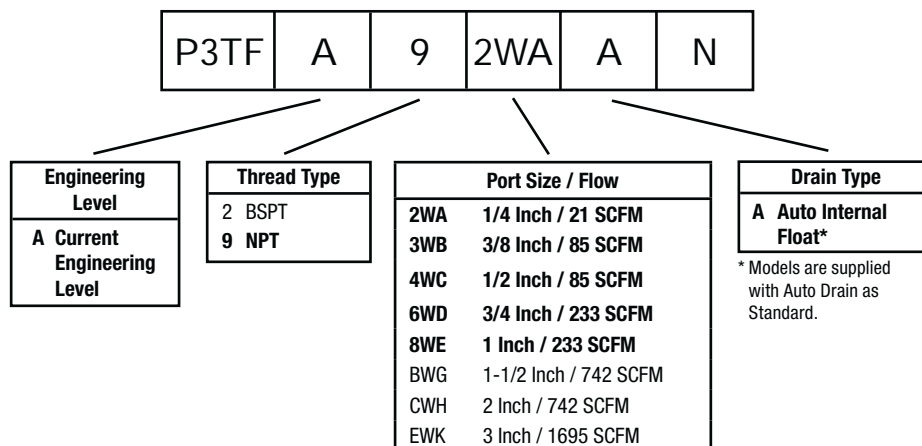

BOLD ITEMS ARE MOST POPULAR.

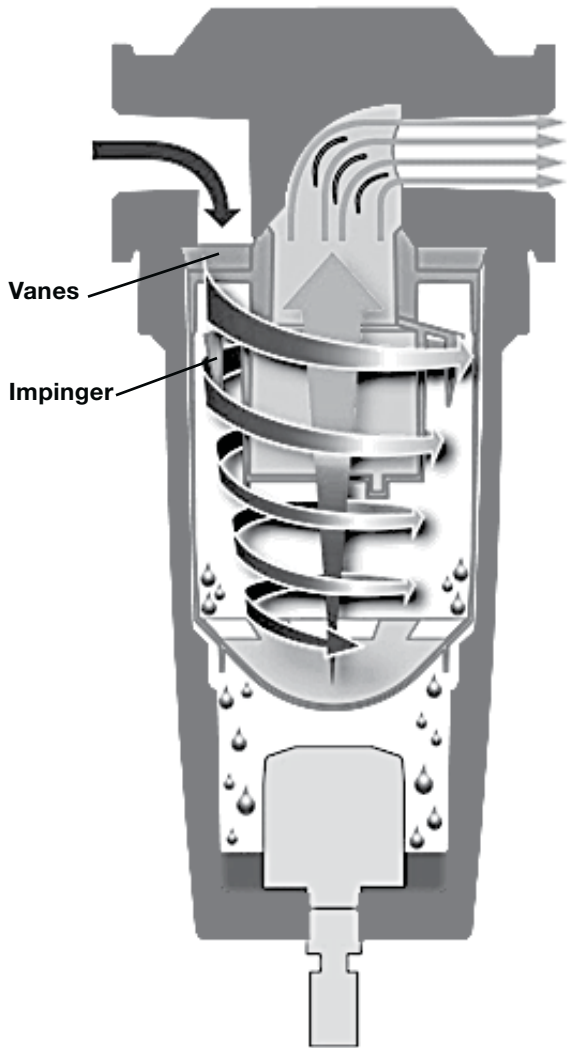

Operation

A E B I T
I
T I C
F A T
T F A I
T A T F C
D I
A C N D D
I
B D C F A D
C A
A A F T T B C
A T T E I O C
I N T E I C
T C T O
T N D D U
C D

Bulk Liquid Separators – P3TF


Specifications


Pressure Differential at Rated Flow ID

Model Number	Pipe Size	SCFM (L/s)	Maximum Operating Pressure psig (bar)	Operating Temperature	Weight Lb. (kg)
P3TFA92WAAN				F C	
P3TFA93WBAN					
P3TFA94WCAN					
P3TFA96WDAN					
P3TFA98WEAN					
P3TFA9BWGAN					
P3TFA9CWHAN					
P3TFA9EWKAN					

C

Flow

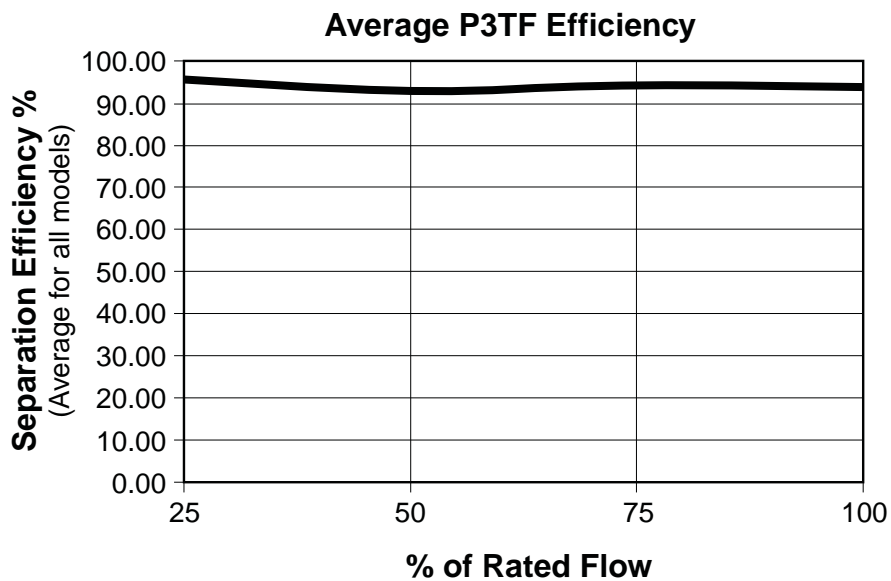

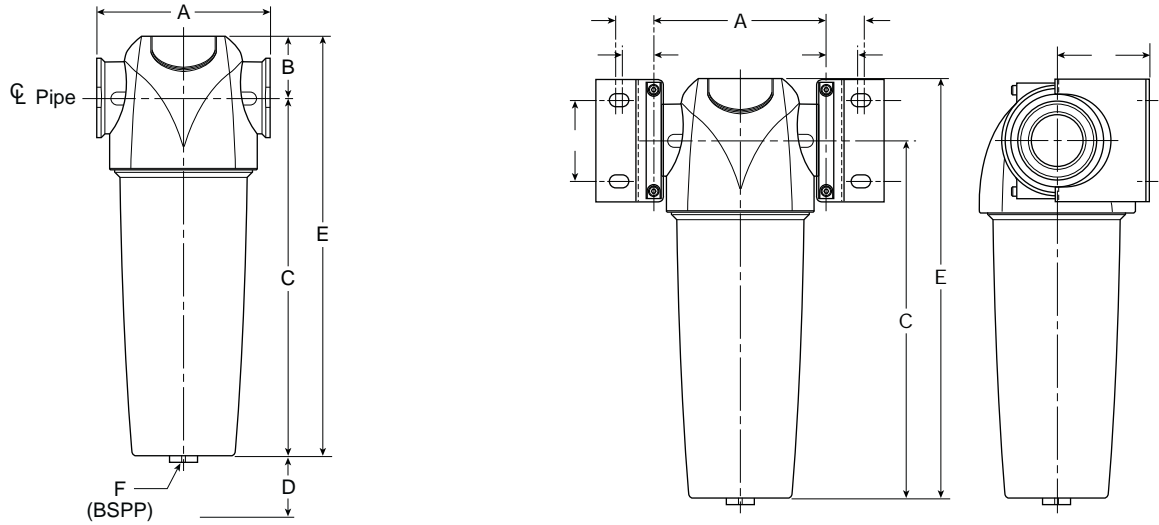

Dimensions

Model Number	Wall Mounting Bracket Kit	Pipe Size	A	B	C	D	E	BSPP F	G	H	J	K
P3TFA92WAAN	P3TKA00MWA											
P3TFA93WBAN	P3TKA00MWB											
P3TFA94WCAN	P3TKA00MWB											
P3TFA96WDAN	P3TKA00MWD											
P3TFA98WEAN	P3TKA00MWD											
P3TFA9BWGAN	P3TKA00MWF											
P3TFA9CWHAN	P3TKA00MWF											
P3TFA9EWKAN	P3TKA00MWJ											

Inches (mm)

Bulk Liquid Separator Kits & Accessories

Drain Kit EFI

Materials of Construction

Automatic Float Drain

Housing / Bowl A

Seals F



Wall Mounting Bracket Kit

OE

For External Drains, please reference WDV3-G Automatic Electrical Drain or ED Zero Loss Drain

DD Desiccant Dryers




Features

- These desiccant dryers are a convenient and cost effective means of ensuring your sensitive pneumatic applications are never exposed to damaging moisture
- Compact size for point-of-use applications
- Drying efficiency down to -40°F pressure dew point
- Easily and quickly serviced
- Sightglass in bowl to monitor desiccant
- Built-in particulate after filter prevents downstream dust
- No electricity needed
- Low pressure drop
- No purge air lost as with other dryer types

Applications

- Paint spraying
- Instrument air
- Laboratory instruments
- Control air systems
- Air blanketing

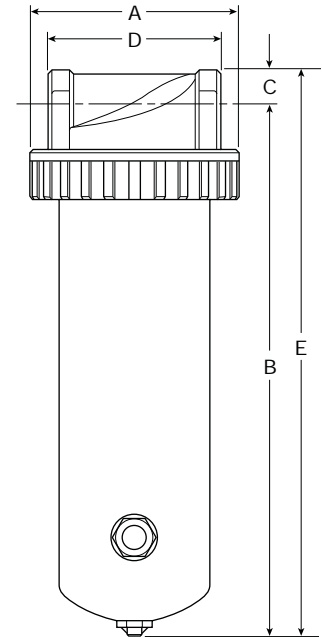

Port Size	15 SCFM	30 SCFM	60 SCFM
Desiccant Capacity ¹	2.5 lb ¹	5 lb. ¹	10 lb. ¹
1/4" ²	DD15-02	N/A	N/A
3/8" ²	DD15-03	N/A	N/A
1/2" ²	DD15-04	DD30-04	DD60-04
3/4"	DD15-06	DD30-06	DD60-06
1"	N/A	DD30-08	DD60-08

DD Desiccant Dryer Dimensions					
	A	B	C	D*	E
DD15					
DD30					
DD60					

D

Notes:

1. Desiccant must be ordered separately
2. These units supplied with reducer bushings

Performance


The rated flow capacities are nominal ratings provided for reference. These capacities are recommended for minimal pressure drop and average desiccant life. A supply of low flow / low humidity air will provide longer desiccant life: whereas, high flow / high humidity air will require more frequent desiccant changes. Installed in an application with intermittent flow, these desiccant dryers will typically dry air for weeks before the silica gel desiccant requires replacement or regeneration.

BOLD ITEMS ARE MOST POPULAR.




As the wet compressed air enters through the inlet, the air travels down through the bed of desiccant which adsorb the water vapor and aerosols. The silica gel desiccant beads will reduce the humidity down to a -40°F pressure dew point. After the moisture has been removed, the dry air passes through a sintered bronze filter element (eliminating dust downstream), up the tube and out the outlet port.

As the desiccant becomes saturated with moisture, the dew point will begin to rise. This is evident when the blue silica gel desiccant beads in the sight glass change to pink, indicating the need for desiccant replacement. Simply remove the flange and bowl and replace with new desiccant or regenerate saturated desiccant by heating to 275°F.

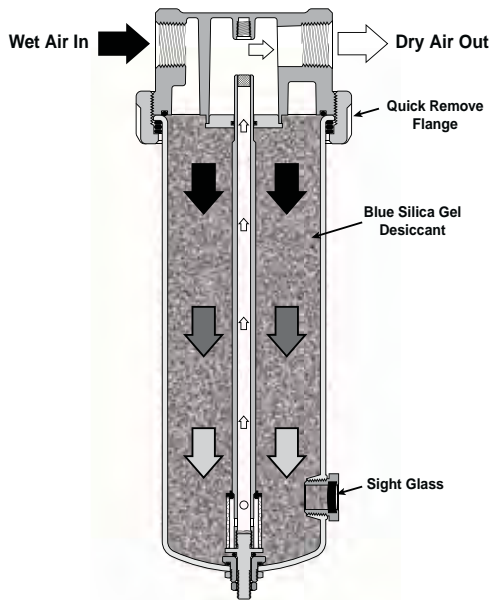

Installation Tips

- Always place a moisture separator/particulate filter (i.e., F602) to remove bulk moisture **and** a coalescing filter (i.e., F701) to remove oil upstream of desiccant dryer. Desiccant coated with oil will not adsorb oil.
- Automatic drains should be used in prefilters
- A spring ball check valve should be installed at the dryer inlet to maximize the life of the desiccant.

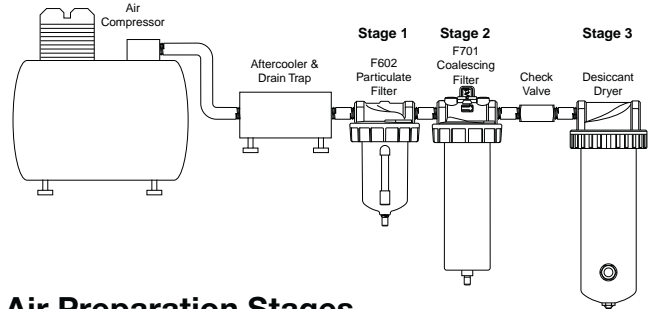

Air Preparation Stages

Stage	Type of Filter	Example	Function Served in Compressed Air System
1	Particulate / Moisture Removal Filters	F602	Removes bulk moisture & particulate matter ¹
2	Coalescing Filters	F701	Removes fine particulate matter, moisture droplets and aerosols, but NOT vapor ²
3	Desiccant Dryer	DD15, DD30, DD60	Removes moisture vapor ³

Notes:

1. Removes approx 75% of moisture
2. Removes approx 99.97% efficient in removing oil & water aerosols >.01 micron
3. Provides pressure dew point of -40° F with unsaturated desiccant

Desiccant Dryers Kits & Accessories

**Desiccant - Environmentally Friendly Silica Gel
100% Indicating –**

- DD15DRP-14-447/003
- DD30DRP-14-447/006
- DD60DRP-14-447/012

Flow Tube Repair Kit (Tube, Filter Element(s), Adaptor)

- DD15RKDD15-02-06
- DD30RKDD30-03-08
- DD60RKDD60-03-08

Mounting Brackets (Recommended for DD15 & DD30 only) –

- 1/4 Inch Pipe Size (Pair of Pipe Mounted Brackets) ... SA200YW57
- 1 Inch Pipe Size (Pair of Pipe Mounted Brackets)..... SA200CW57

Spring Check Valve for Inlet (250 PSIG max.) –

- (Maximizes Life of Desiccant)
- 1/4 Inch NPT003393001
- 3/8 Inch NPT003393002
- 1/2 Inch NPT003393003
- 3/4 Inch NPT003393004

Specifications

Desiccant Capacity (Desiccant must be ordered separately) –

- DD152.5 lb.
- DD305 lb.
- DD6010 lb.

Filter Element Rating –

- DD15, DD3090 micron
- DD6040 micron

Pressure & Temperature Ratings –

- Optimum working temperature Below 100° F
- Pressure Range 0 to 300 PSIG
- Temperature Range 32°F to 180°F

Weight (Housing Only) –

- DD15 (add 2.5 lb for weight full).....8 lb.
- DD30 (add 5 lb for weight full).....13 lb.
- DD60 (add 10 lb for weight full).....20 lb.

Materials of Construction

Bowl –

- DD15, DD30Aluminum
- DD60 Steel

Flow Tube

.....CPVC

Filter Elements

.....Sintered Bronze

Head & Flange Ring

.....Zinc

Other Hardware

..... Brass

Seals

..... Buna-N

Sight Glass

..... Glass & Steel



Regulators

Regulation

An air regulator is a specialized control valve. It reduces upstream supply pressure level to a specified constant downstream pressure.

Pneumatic equipment that is operated at higher-than-recommended pressure wastes the energy to generate that pressure. It creates a potential safety hazard, and probably will wear out prematurely. Operating below specified pressure can cause the machine to fail to meet design performance specifications. Therefore, precise air pressure control is essential to efficient operation of air-powered equipment.

How to Select the Proper Regulator

While regulator bodies are generally constructed of die-cast metal, other external parts may be either metal or plastic. Remember that all-metal construction is best for tough applications, where abuse is likely to occur, but plastic construction is generally lower in cost. For normal industrial applications, either construction is suitable.

Inlet pressure rating and downstream controlled range, as well as flow capacity, must be determined before selecting a regulator. Port size should match piping size.

Required response time, relieving capability, and type of adjustment are other considerations. Highly sensitive, lightweight diaphragm sensors vs. the slower, but often more durable, piston sensors. Self-relieving vs. non-relieving regulators. T-Handles or knobs as the adjustment mechanism, or air pilot operated regulator which offer remote adjustment. Other choices to be made include gauge, panel mount and other special options.

Regulator Construction

Regulators are generally constructed using a die-cast metal body. Other external parts, such as the spring cage and bottom plug, may be either metal or plastic. All-metal construction offers more durability in tough applications where abuse is likely to occur, while the plastic construction offers lower cost. For normal industrial applications (temperature range of 40° to 120° F and supply pressure to 300 PSIG), either construction will serve well.

Lightweight diaphragm sensors offer quick response and high sensitivity to air pressure changes. Piston sensors are somewhat slower but may be more durable. Where downstream pressure requirements change rapidly enough to cause regular chatter, slower response may be an advantage.

If the self-relieving feature is not needed for an application, simpler non-relieving regulators are available.

For regulators with an adjustment spring, a -T-Handle or knob provides the external link to the spring on various models.

Pilot-operated regulators substitute air pressure in the chamber above the sensor to provide the reference force.

Remote adjustment through a separate pilot regulator thus becomes possible, or the pilot signal can be fed back from a downstream location for precise control.

The balanced inner valve design exposes both sides of the inner valve to essentially the same pressure. This eliminates much of the effect that changes in inlet pressure might have on inner valve position and orifice opening.

Regulator Operation

In a typical regulator, an inner valve sets the size of an orifice which connects inlet port to outlet port. The sensing element, often a diaphragm or piston mechanically linked to the inner valve, reacts to downstream pressure and a reference force to position the inner valve. The reference force can be a spring, or an air pilot chamber.

The valve is normally open. High pressure air enters and flows through the orifice toward the outlet. Downstream pressure is connected through an aspirator tube to the bottom of the diaphragm. As downstream pressure increases, the diaphragm is forced upward, compressing the adjustment spring. When the diaphragm moves, the inner valve spring pushes the inner valve disc upward to throttle the orifice. If downstream pressure exhausts, the mechanical sequence reverses and the inner valve disc opens the orifice until the set pressure is reached again.


The arrangement of separate diaphragm chamber and aspirator tube accomplishes two purposes. First, the diaphragm is moved out of the potentially abrasive air stream. Second, and more important, if the downstream system calls for high flow, this flow generates a low pressure venturi effect at the end of the aspirator tube and into the diaphragm chamber. The diaphragm therefore reacts more quickly to open the orifice via the inner valve, thereby improving response time to high flow demands.

Some circuits may be subject to downstream-generated high pressure (from high temperatures or heavy vertical loads on cylinders, for example). This high pressure is reduced by a self-relieving feature built into the regulator. The inner valve stem normally blocks a relieving orifice in the center of the diaphragm. If excessive pressure lifts the diaphragm off the stem, air bleeds through the orifice and out the spring cage vent until the system returns to the set pressure.


Regulators

Regulator Comparison Chart

		High Precision Regulators			Precision Regulator	Standard Regulator
		R210	R220	R230	R216	R10, R11, R119
Repeatability / Sensitivity	<i>Examples →</i> Regulator's ability to return to a set pressure after inducing flow.	0.005 PSIG 1/8" Water Column	0.005 PSIG 1/8" Water Column	0.010 PSIG 1/4" Water Column	0.5 to 1.0 PSIG	2 to 4 PSIG
Reduced Pressure Variation	This refers to the regulator's ability to maintain a consistent output pressure when faced with variables such as time, cycling, temperature, supply pressure, flow, etc.	Best	Best	Better	Good	Average
Input Pressure	Unregulated air pressure going into the regulator	150 PSIG Max.	150 PSIG Max.	250 PSIG Max.	Varies	Varies
Effect of Supply Pressure Variation on Regulated Pressure	Reduced / set pressure variation when input pressure changes by 100 PSIG	0.020 PSIG	0.020 PSIG	0.100 PSIG	4 PSIG	Approx. 3 - 6 PSIG
Reduced Pressure Range	Reduced pressure ranges available	2-40 PSIG 2-120 PSIG	2-120 PSIG	0-2 PSIG 0-30 PSIG 0-60 PSIG 0-150 PSIG	Varies	Varies
Flow Capacity	Regulator's flow capacity	14 SCFM	14 SCFM	80 SCFM	Varies	Varies
Exhaust (Relief) Capacity	Regulator's exhaust/relief flow rating when backpressure is introduced from downstream	3 SCFM	11 SCFM	4 SCFM	Low	Low
Overpressure to Relieve <i>*Key in cylinder applications</i>	Regulator's sensitivity to relieve excess downstream pressure over the set pressure.	Best (0.005 PSIG)	Best (0.005 PSIG)	Better (0.010 PSIG)	Good (1 PSIG)	Average (5-10 PSIG)
Constant Bleed	Does the regulator constantly bleed air to the atmosphere to maintain accuracy?	Yes	Yes	Yes	Varies	No
Size Constraints	Overall size of regulator	4.5" H x 2.06" W	4.5" H x 2.06" W	5.5" H x 3" W	Varies	Varies
Mounting Constraints	Mounting options	Panel, Pipe, or Bracket	Panel, Pipe, or Bracket	Panel, Pipe, or Bracket	Panel, Pipe, Bracket, or Modular	Varies
Port Size	Inlet / Outlet port size	1/4"	1/4"	1/4" or 3/8"	Varies	Varies

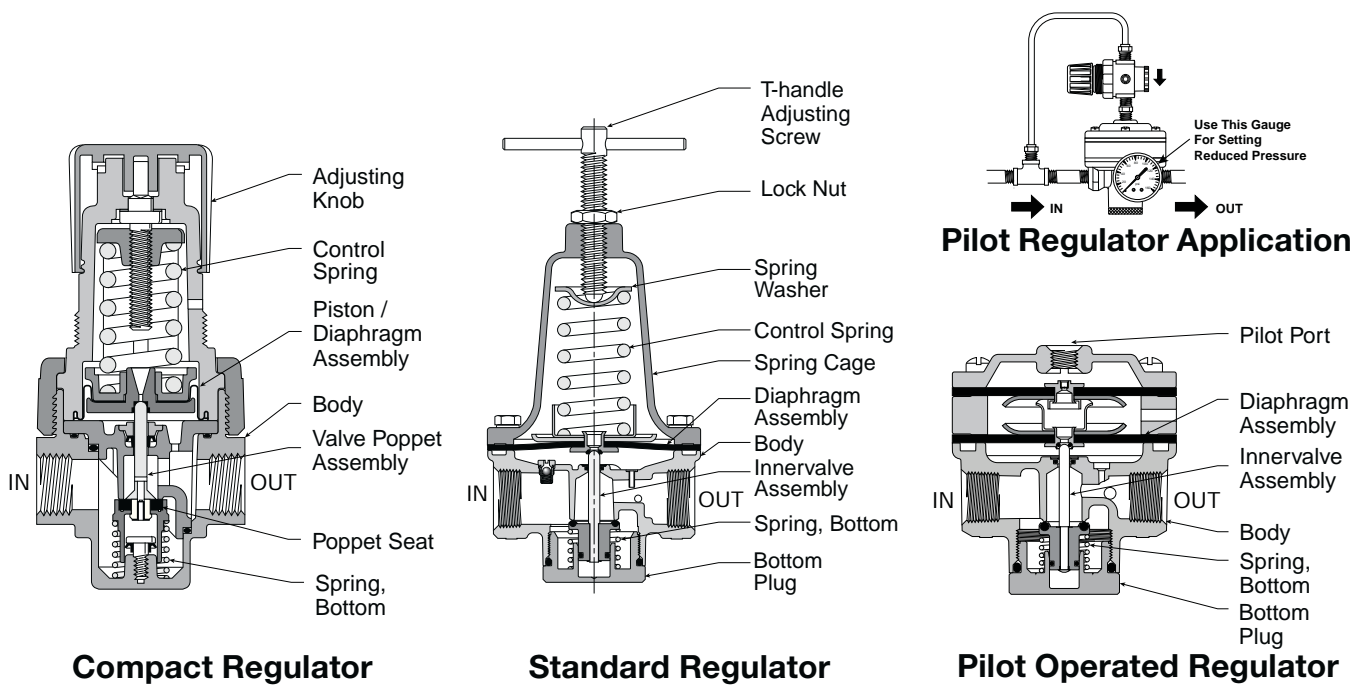


14R Regulators – Miniature



Features

U
N
C I I
E
CF
CF

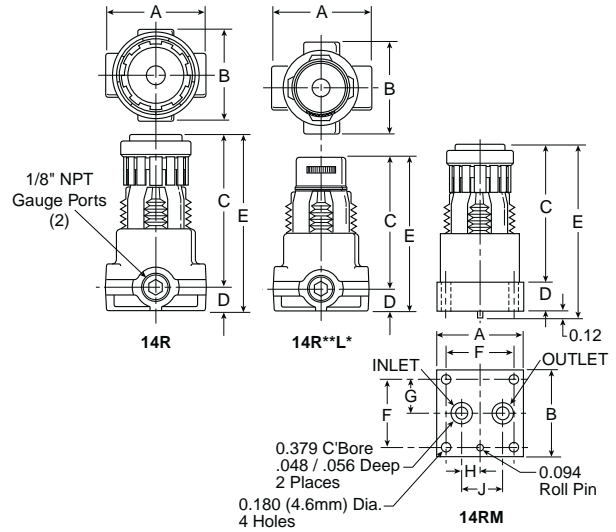


Port Size	NPT
	14R013F*
	14R113F*
	14R018F*
	14R118F*

14R Regulator Dimensions					
14R	A	B	C	D	E
14R**L*	A	B	C	D	E
14RM	A	B	C	D	E
	F	G	H	J	

Bold Items are Most Popular.
For other models refer to ordering information below.
NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 90 PSIG no flow secondary setting and 10 PSIG pressure drop.

Ordering Information



Port Size	Pressure Range	Relief	Port Type	Options	Preset / Pressure Limited
0 1/8 Inch Pipe, 1/8 Inch Gauge Port	<u>Without Gauge</u> <u>Yellow Knob</u> <u>Black Knob</u>	F Relieving	Blank NPT	Blank No Options	Blank None
1 1/4 Inch Pipe, 1/8 Inch Gauge Port	10 30 PSIG B0 30 PSIG	G Non-Relieving	1 BSPP	L† Preset Non-Adjustable	XXX* Preset Pressure
B 1/4 Inch Pipe, 1/4 Inch Gauge Port	11 60 PSIG B1 60 PSIG	H Low Temp. Relieving	2 BSPT	P† Preset Adjustable	XXX* Pressure Limited
C 1/8 Inch Pipe, No Gauge Port	12 15 PSIG B2 15 PSIG	J Low Temp. Non-Relieving		S† Pressure Limiter Max. Adjustable	
M Manifold Mounting	13 125 PSIG B3 125 PSIG			T Pressure Limiter Max. Non-Adjustable	
	<u>With Gauge</u>				
	15 30 PSIG B5 30 PSIG				
	16 60 PSIG B6 60 PSIG				
	17 15 PSIG B7 15 PSIG				
	18 125 PSIG B8 125 PSIG				

Engineering Level

* Will be Entered at Factory



† Inlet Pressure is 100 PSIG. For other pressures, contact factory.

* Available Preset / Pressure Limited Range, 10 to 90 PSIG in 5 PSIG increments. For higher pressures, contact factory.
(Example: 065 = 65 PSIG)

Spring Type by Preset / Limited Pressure:
F I
F I
F I

BOLD ITEMS ARE MOST POPULAR.

R34 Regulators – Miniature



Features

D

D

B

A

A

N

CF


CF



R344-02C



R342-0MC

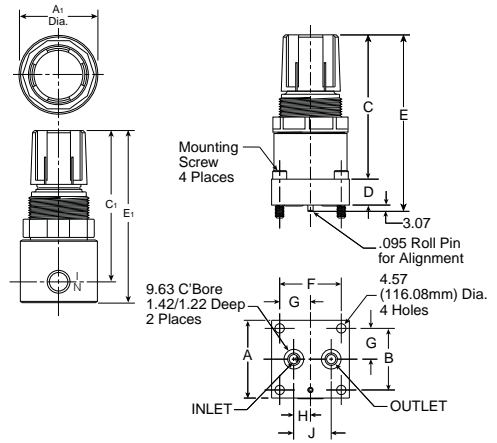


R34 Miniature Regulator Dimensions				
A	A1	B	B1	C
C1	D	E	E1	F
G	H	J		

Model Type	Port Size	Without Gauge	Without Gauge	Without Gauge	With Gauge	With Gauge	With Gauge
		0 to 30 psig (0.0 to 2.1 bar)	0 to 60 psig (0.0 to 4.1 bar)	0 to 125 psig (0.0 to 8.6 bar)	0 to 30 psig (0.0 to 2.1 bar)	0 to 60 psig (0.0 to 4.1 bar)	0 to 125 psig (0.0 to 8.6 bar)
Relieving		A	B	C	A	B	C
		A	B	R344-02C	A	B	R344-02CG
		A	B	R342-0MC	--	--	--

Standard part numbers shown bold.
For other models refer to ordering information below.
CF

Ordering Information



Number of Ports 2 2 Ports 4* 4 Ports	Thread - NPT G BSPP	Port 01 1/8" 02 1/4" 0M Manifold Mount	Pressure Range A 0-30 PSI B 0-60 PSI C 0-125 PSI	Options Blank No Options G Gauge K Non-Relieving Diaphragm P Panel Mount Nut	Options Blank No Options L† Preset Non-Adjustable M† Preset Adjustable	Preset / Pressure Limited Blank None XXX* Preset Pressure XXX* Pressure Limited
---	----------------------------------	--	--	---	--	---

* Not Available with Manifold Mount.



† Inlet Pressure is 100 psig. For other pressures, contact factory.

* Available Preset / Pressure Limited Range, 10 to 90 psig in 5 psig increments. For higher pressures, contact factory.
(Example: 065 = 65 psig)

BOLD ITEMS ARE MOST POPULAR.



Technical Information

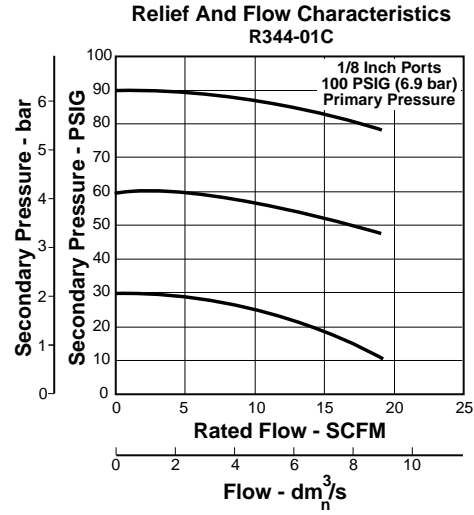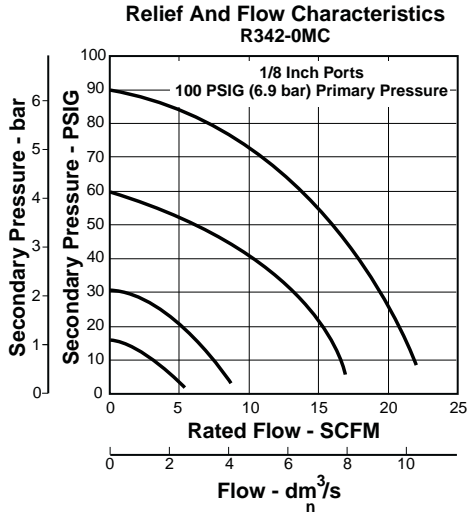


CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

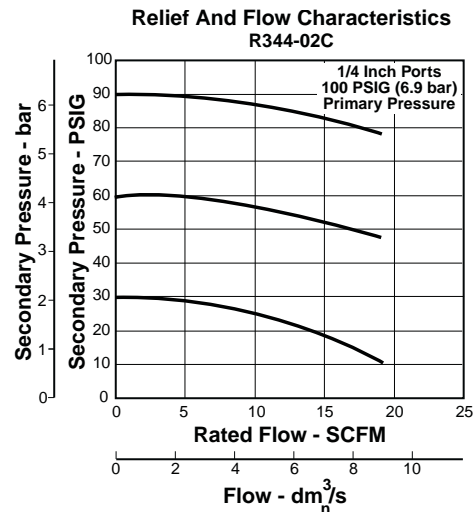

R34 Regulator Kits and Accessories

Diaphragm Assembly – Non-relieving	GRP-96-726
Relieving	GRP-96-725
Spring, Regulating – 0 to 30 psig (0 to 2.1 bar).....	GRP-95-111
0 to 60 psig (0 to 4.1 bar).....	GRP-96-718
0 to 125 psig (0 to 8.6 bar).....	GRP-96-717
Panel Mount Nut – A	A
Mounting Bracket Kit – I	N A
Gauges –	
D F N T CB	N
D F N T CB	N

Materials of Construction


Body	A
Bonnet	A
Diaphragm & Seals	N
Valve Assembly	B
Springs	
Panel Nut	A

Specifications

Operating Temperature	-40° F to 150°F (-40° C to 65.5°C)
Supply Pressure	300 psig Maximum (20.4 bar)
Port Threads.....	1/8, 1/4 Inch
Gauge Ports	(2) Std 1/8 Inch (No Gauge Port Version Available)
Weight.....	.25 lbs. (0.11 kg)



R24, R25 Regulators – Miniature (Air / Water Service)




Features



C
 FDA
 U
 N
 C
 D

N F

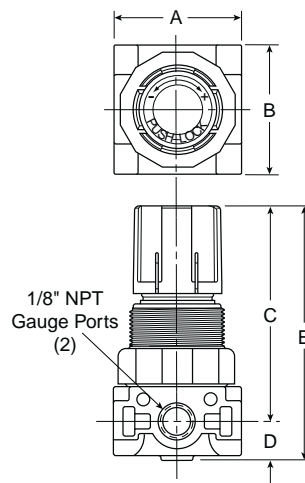


Port Size	NPT	
	Air Service Relieving	Water Service Non-Relieving
	R25-01C	R24-01CK
	R25-02C	R24-02CK

R24, R25 Regulator Dimensions		
A	B	C
D	E	

Bold Items are Most Popular.
 For other models refer to ordering information below.

NOTE D



Ordering Information

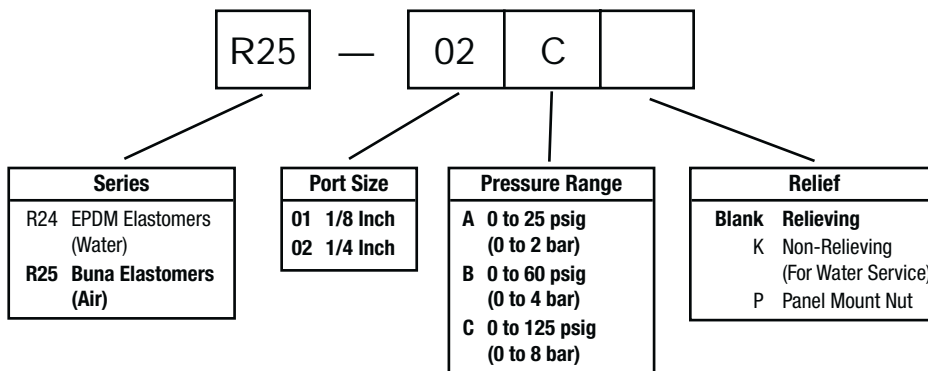

BOLD ITEMS ARE MOST POPULAR.



Technical Information

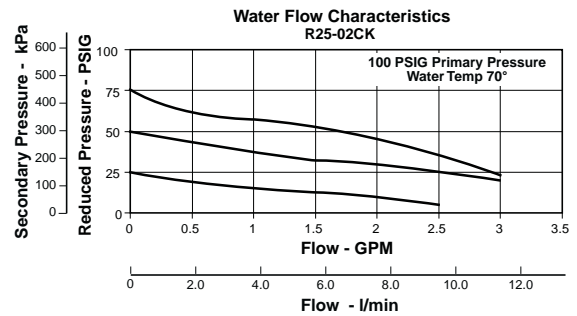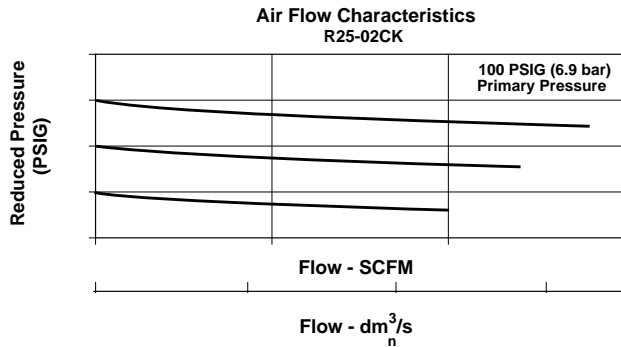

⚠ WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

R24, R25 Regulator Kits and Accessories

- Panel Mount Nut – A A
- Mounting Bracket and Nut A
- Service Kits – B
- N B E D
- N E D
- Springs –

Materials of Construction



- Adjusting Screw
- Body A
- Bonnet and Seat A
- Diaphragm (R25) B N
- Diaphragm (R24) E D
- Seals (R25) B N
- Seals (R24) E D
- Springs
- Valve Poppet (R25) B N
- Valve Poppet (R24) E D

Specifications

- Gauge Ports (2) I
- Pressure Rating – C
- Port Threads I
- Temperature Rating F F C C
- Weight




R45, R46 Regulators – Miniature (Air / Water Service)

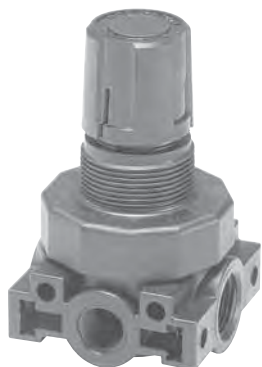

Features

C FDA C N F
 U
 N
 C
 D

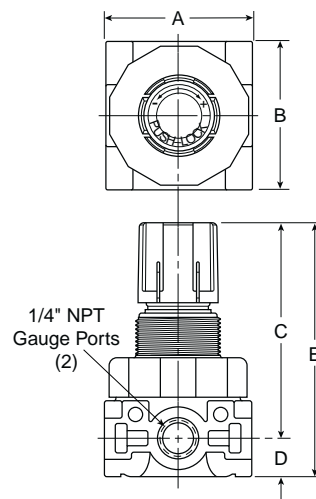


Port Size	NPT	
	Air Service Relieving	Water Service Non-Relieving
	R45-02C	R46-02CK
	R45-03C	R46-03CK

R45, R46 Regulator Dimensions		
A	B	C
D	E	

Bold Items are Most Popular.
 For other models refer to ordering information below.

NOTE D



Ordering Information

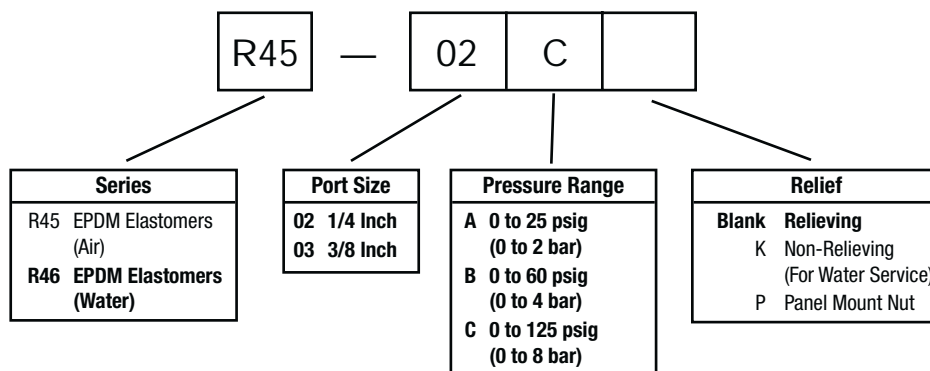

BOLD ITEMS ARE MOST POPULAR.



Technical Information

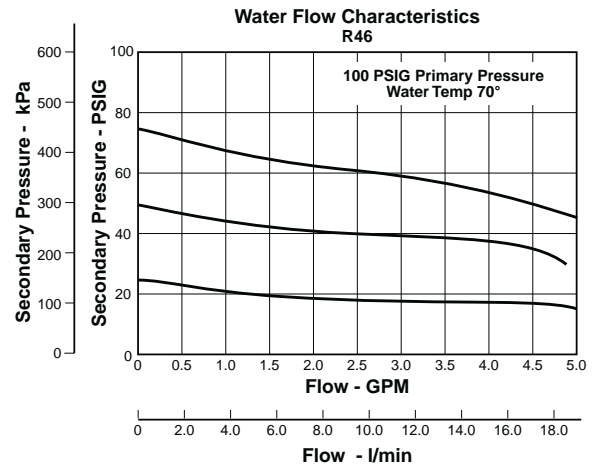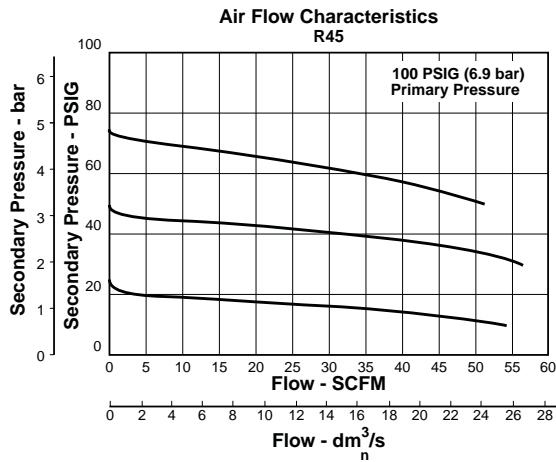

⚠ WARNING
 Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

R45, R46 Regulator Kits and Accessories

- Panel Mount Nut – A
- Mounting Bracket and Nut – A
- Service Kits – N
- Springs –

Specifications


- Gauge Ports (2) – I
- Pressure Rating – I
- Port Threads – I
- Temperature Rating – F F C C
- Weight –

Materials of Construction

- Adjusting Screw –
- Body – A
- Bonnet and Seat – A
- Diaphragm (R45) – B N
- Diaphragm (R46) – E D
- Seals (R45) – B N
- Seals (R46) – E D
- Springs –
- Valve Poppet (R45) – B N
- Valve Poppet (R46) – E D




R364, R374 Regulators – Miniature



Features

C
C
U
D
N

CF A

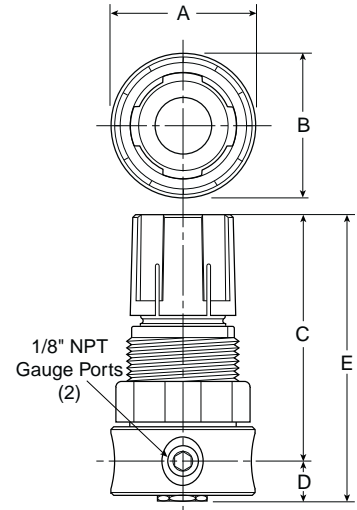

Port Size	NPT
Brass	R364-01C
	R364-02C
Aluminum	R374-01C
	R374-02C

R364, R374 Regulator Dimensions		
A	B	C
D	E	



Standard part numbers shown bold.

For other models refer to ordering information below.

NOTE: 1.250 Dia. (31.8mm) hole required for panel mounting.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 75 PSIG no flow secondary setting and 25% pressure drop.

Ordering Information

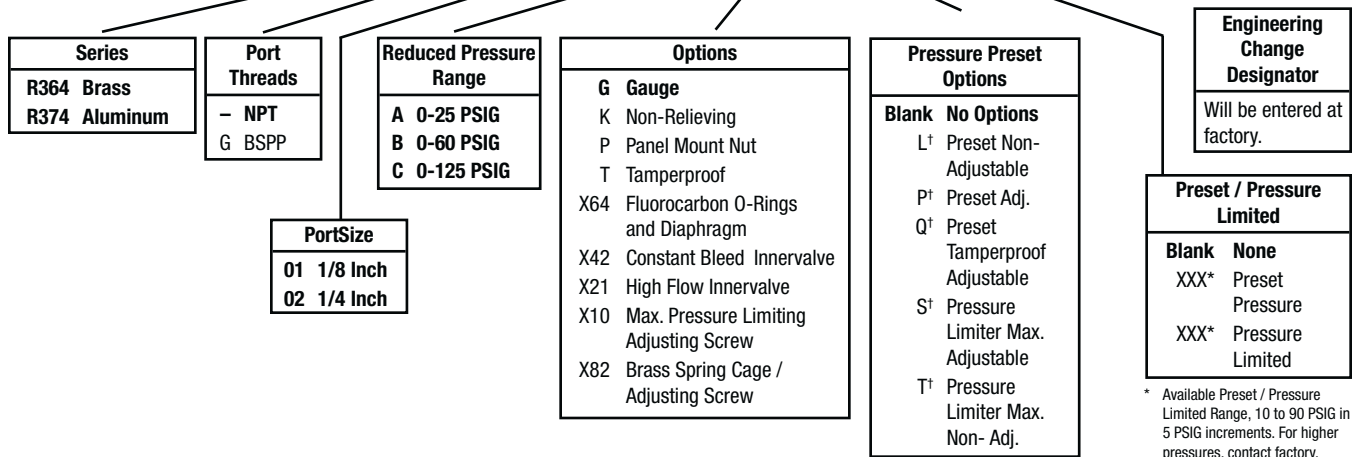



† Inlet Pressure is 100 PSIG. For other pressures, contact factory.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

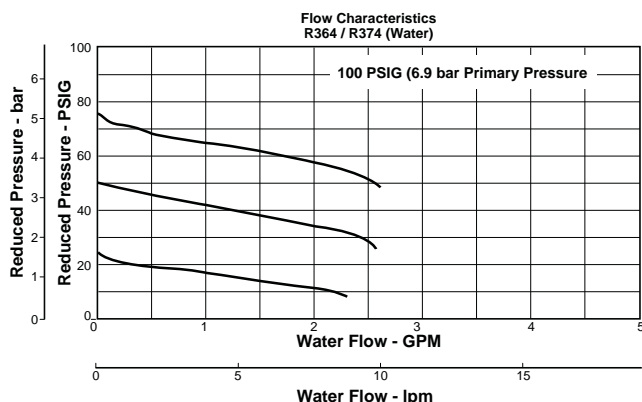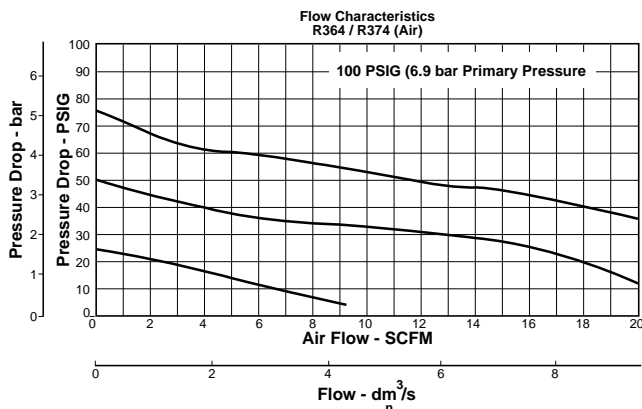

⚠ WARNING
 Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

R364, R374 Regulator Kits & Accessories

- Gauges – 1-1/2" Dial Size, 1/8" Back Connection
 0 to 60 PSIG (0 to 400 kPa) K4515N18060
- 1-1/2" Dial Size, 1/8" Back Connection
 0 to 160 PSIG, (0 to 1100 kPa) K4515N18160
- Mounting Bracket KitSA161X57
 (Includes Panel Mount Nut)
- Panel Mount Nut – PlasticR05X51-P
 AluminumR05X51-A
- Spring Cage & KnobCKR364Y
- Spring Cage Kit (Tamperproof) CKR364T
- Repair Kits –
- N
- N D A A
- F D A
- N
- N D D A A
- D D A


Specifications

- Gauge Ports (2) 1/8 Inch
- Port Threads 1/8, 1/4 Inch
- Primary Pressure Rating 2 to 125 PSIG (-15 to 8.5 bar)
- Supply Pressure 300 PSIG Maximum (20.4 bar)
- Temperature Rating 40°F to 125°F (4.4°C to 52°C)
- Weight – Brass Body 0.5 lb. (0.23 kg) / Unit
 25 lb. (11.34 kg) / 48-Unit Master Pack
- Aluminum Body 0.25 lb. (0.11 kg) / Unit
 15 lb. (6.80 kg) / 48-Unit Master Pack

Materials of Construction


- Adjusting Screw Steel
- Body – R364 Brass
- R374 Aluminum
- Springs – Adjusting Steel
- Bottom Stainless Steel
- Spring Cage Acetal
- Bottom Plug, Innervale, Diaphragm Bottom Brass

15R Regulators – Economy



Features

- Solid control piston with resilient seat for service-free operation
- Non-rising “locking” adjusting knob
- Compact, 3.30 inch (84mm) high by 2.12 inch (54mm) wide
- Easily serviced
- High flow: 1/4" – 21 SCFM[§]
 3/8" – 28 SCFM[§]

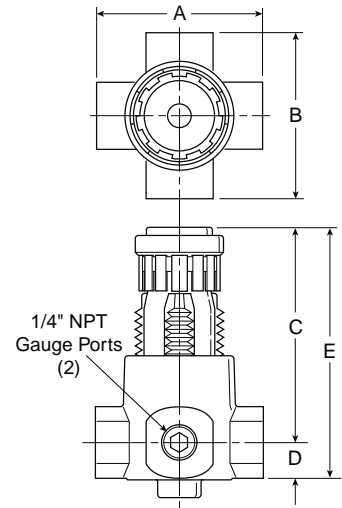


Port Size	NPT
	15R113F*
	15R213F*
	15R118F*
	15R218F*

15R Regulator Dimensions		
A	B	C
2.12 (54)	2.00 (51)	2.60 (66)
D	E	
0.70 (18)	3.30 (84)	

Standard part numbers shown bold.
 For other models refer to ordering information below.
 NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
 § SCFM = Standard cubic feet per minute at 100 PSIG inlet, 90 PSIG no flow secondary setting and 10 PSIG pressure drop.



Ordering Information

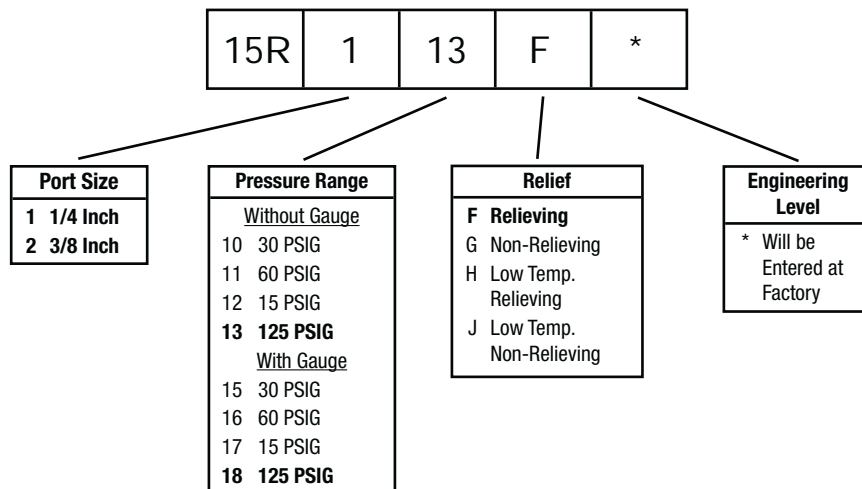

BOLD ITEMS ARE MOST POPULAR.



Technical Information

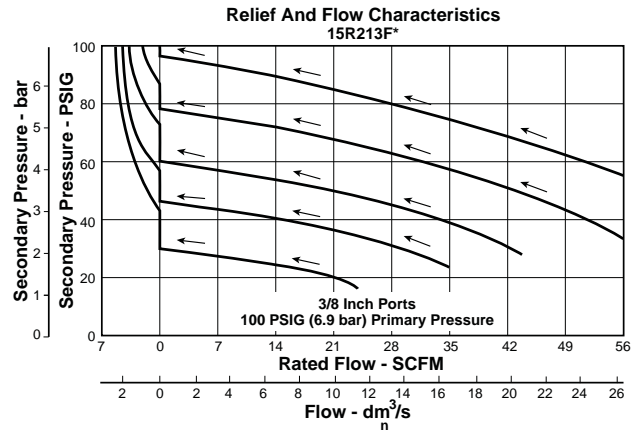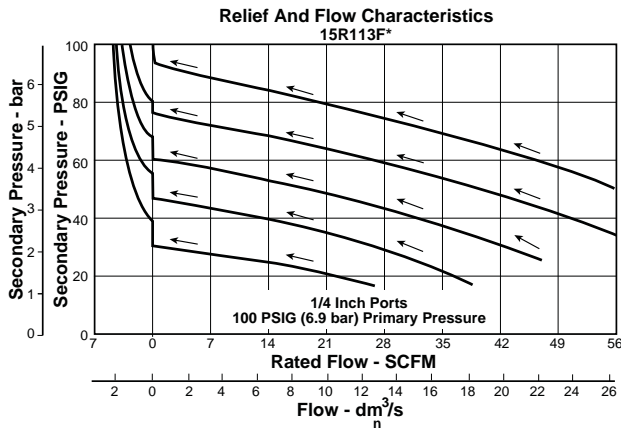

⚠ WARNING
 Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

15R Regulator Kits & Accessories

Body Service Kit – Unbalanced					
Bonnet Assembly Kit					
Gauges –	I	N T		N	
	I	N T		N	
	I	N T		N	
	I	N T		N	
	I	N T		N	
Mounting Bracket Kit* I			N		B
Panel Mount Nuts* –					
Service Kits – N					
Springs –	I		B		
	I				
	I				
	I				
T			N		

Specifications


Gauge Ports (2)					I
C	F	F			
Port Threads					I
Pressure Ratings				I	
Secondary Pressure Ranges –				I	
				I	
				I	
Temperature Ratings	F	F	C	C	
T	F	F	C	C	
Weight					

Materials of Construction

Adjusting Nut					B
Adjusting Stem & Spring					
Body					
Bonnet, Seat, Piston & Valve Poppet					
Seals					N




R10 Regulators – Compact

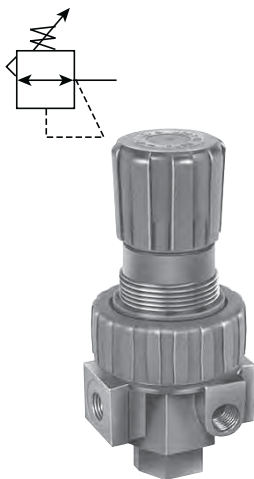

Features

- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Rolling diaphragm for extended life
- Two high flow 1/4" gauge ports can be used as additional outlets
- Easily serviced
- Removable non-rising knob for panel mounting and tamper resistance
- High flow: 1/4" – 53 SCFM[§]
 3/8" – 60 SCFM[§]
 1/2" – 75 SCFM[§]

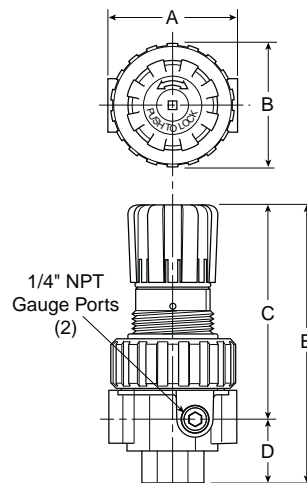


Port Size	NPT
Without Gauge	
1/4"	R10-0211A*
3/8"	R10-0311A*
1/2"	R10-0411A*
With 160 PSI Gauge	
1/4"	R10-0218A*
3/8"	R10-0318A*
1/2"	R10-0418A*

R10 Regulator Dimensions				
A	B	C	D	E

Standard part numbers shown bold.
 For other models refer to ordering information below.
 NOTE: 2.00 Dia. (51mm) hole required for panel mounting.
 § SCFM = Standard cubic feet per minute at 100 psig inlet,
 90 psig no flow secondary setting and 10 psig pressure drop.

Ordering Information



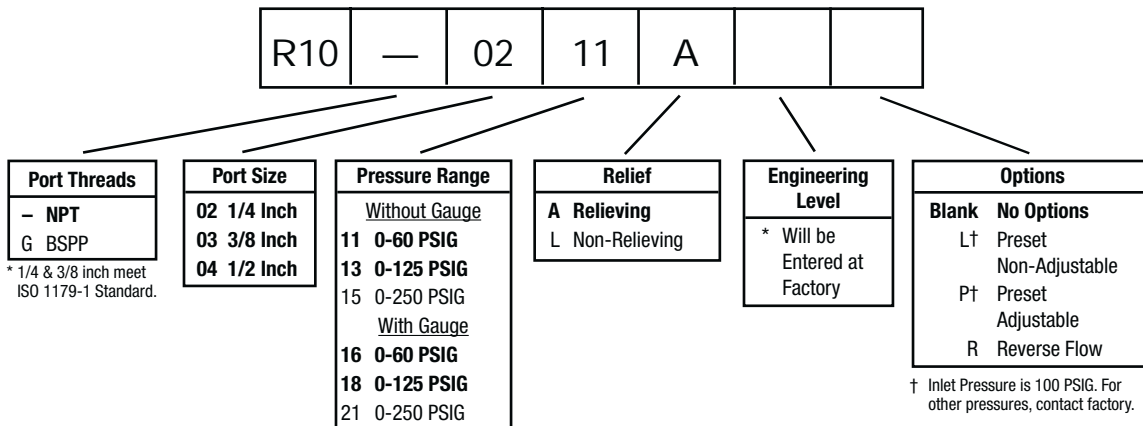


BOLD ITEMS ARE MOST POPULAR.



Technical Specifications – R10

Technical Information

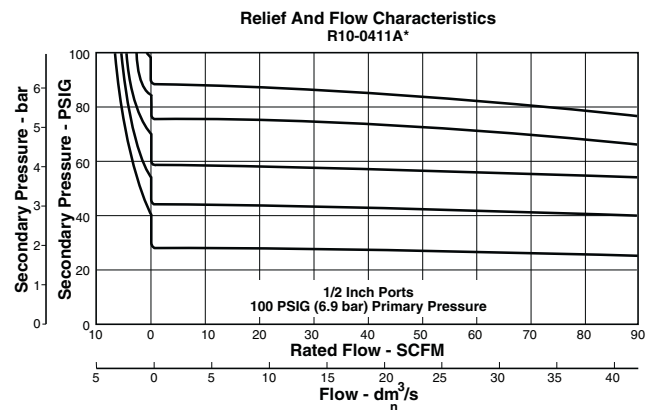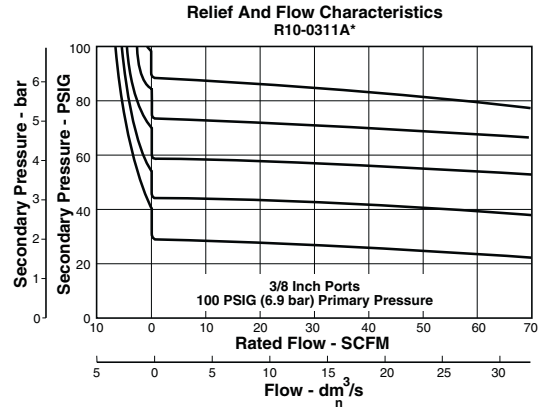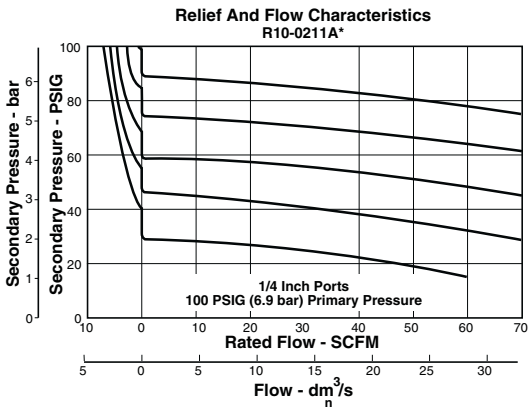

⚠️ WARNING

Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

⚠️ CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

R10 Regulator Kits & Accessories

- Bonnet Assembly Kit** PS715
- Control Knob** P04069B
- Gauges – 2" Dial Face**
 - 60 psig (0 to 4.1 bar)..... K4520N14060
 - 160 psig (0 to 11.0 bar).....K4520N14160
 - 300 psig (0 to 20.0 bar)..... K4520N14300
- 1-3/4" Digital Round Face**
 - 160 psig (0 to 11.0 bar)..... K4517N14160
- Mounting Bracket Kit** (Includes Panel Mount Nut)..... PS707
- Panel Mount Nut** – Plastic.....P04082
- Metal..... P04079B
- Reverse Flow Service Conversion Kit –**
 - RelievingPS708R
- Service Kit** – Relieving (Includes Poppet)..... PS708
- Non-Relieving (Includes Poppet)..... PS709
- Springs** – 1-30 psig Range.....P01698
- 1-60 psig Range.....P04062
- 2-125 psig Range.....P04063
- 5-250 psig Range.....P04064
- Tamperproof Kit**..... PS737


Specifications

- Gauge Ports (2)** 1/4 Inch
(Can be used as additional High Flow 1/4 Inch Outlet Ports)
- Port Threads** 1/4, 3/8, 1/2 Inch **Primary Pressure Rating** –
Maximum Primary Pressure 250 psig (17.2 bar)
- Secondary Pressure Ranges –**
 - Standard Pressure..... 2 to 125 psig (0 to 8.6 bar)
 - Low Pressure..... 1 to 60 psig (0 to 4.1 bar)
 - High Pressure..... 5 to 250 psig (0.4 to 17.2 bar)
- Temperature Rating**32°F to 175°F (0°C to 80°C)
Low Temperature -4°F to 125°F (-20°C to 52°C)
- Weight**1.6 lb. (0.7 kg)

Materials of Construction


- Adjusting Stem** Steel
- Body** Zinc
- Bonnet, Piston Stem, Valve Poppet & Cap** Plastic
- Collar, Knob**..... Plastic
- Diaphragm** Nitrile
- Seals** Nitrile
- Springs** – Poppet Stainless
- Control..... Steel

R10 Regulators – Standard

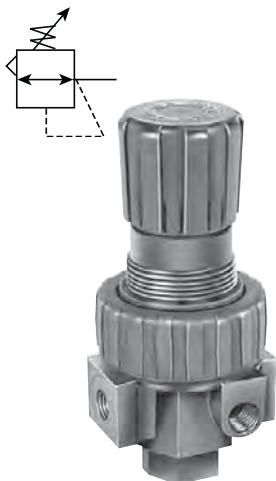

Features

- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Rolling diaphragm for extended life
- Two high flow 1/4" gauge ports can be used as additional outlets
- Easily serviced
- Removable non-rising knob for panel mounting and tamper resistance
- High flow: 3/4" – 90 SCFM[§]

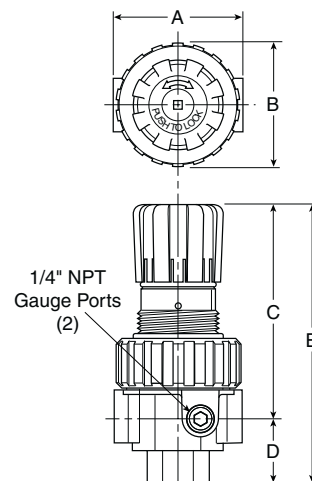

Port Size	NPT
Without Gauge	
3/4"	R10-0611A*
With 160 PSI Gauge	
3/4"	R10-0618A*

R10 Regulator Dimensions				
A	B	C	D	E
3.24 (82)	2.74 (70)	4.79 (122)	1.61 (41)	6.40 (163)

inches (mm)

Standard part numbers shown bold.


For other models refer to ordering information below.

NOTE: 2.00 Dia. (51mm) hole required for panel mounting.

§ SCFM = Standard cubic feet per minute at 100 psig inlet,

90 psig no flow secondary setting and 10 psig pressure drop.


Ordering Information

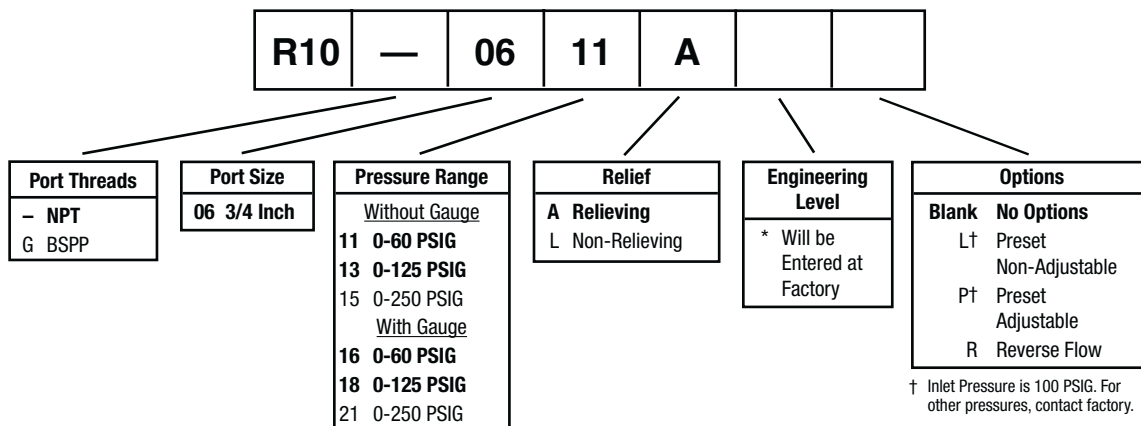

BOLD ITEMS ARE MOST POPULAR.

Technical Specifications – R10

Technical Information

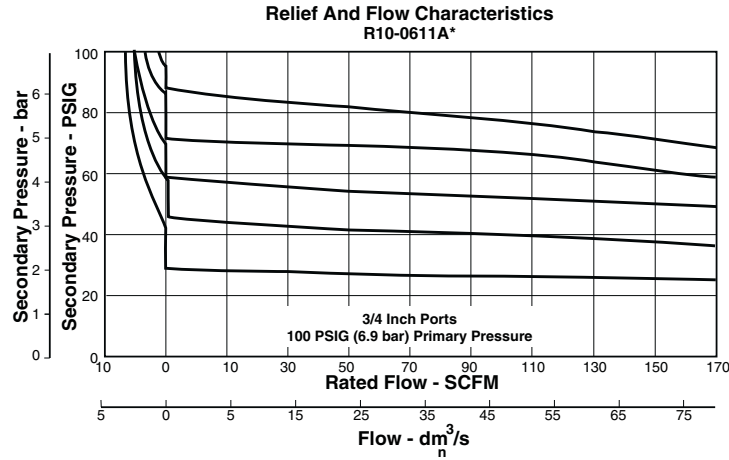

⚠ WARNING

**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.**

⚠ CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

R10 Regulator Kits & Accessories

- Bonnet Assembly Kit PS715
- Control Knob P04069B
- Gauges – 2" Dial Face
 - 60 psig (0 to 4.1 bar)..... K4520N14060
 - 160 psig (0 to 11.0 bar).....K4520N14160
 - 300 psig (0 to 20.0 bar)..... K4520N14300
- 1-3/4" Digital Round Face
 - 160 psig (0 to 11.0 bar)..... K4517N14160
- Mounting Bracket Kit (Includes Panel Mount Nut)..... PS807
- Panel Mount Nut – Plastic.....P04082
- Metal P04079B
- Reverse Flow Service Conversion Kit –
 - Relieving.....PS808R
- Service Kit – Relieving (Includes Poppet)..... PS808
- Non-Relieving (Includes Poppet) PS809
- Springs – 1-30 psig RangeP01698
- 1-60 psig RangeP04062
- 2-125 psig RangeP04063
- 5-250 psig RangeP04064
- Tamperproof Kit PS737

Specifications

- Gauge Ports (2) 1/4 Inch
(Can be used as additional High Flow 1/4 Inch Outlet Ports)
- Port Threads 1/2, 3/4 Inch
- Primary Pressure Rating –
 - Maximum Primary Pressure..... 250 psig (17.2 bar)
- Secondary Pressure Ranges –
 - Standard Pressure 2 to 125 psig (0 to 8.6 bar)
 - Low Pressure 1 to 60 psig (0 to 4.1 bar)
 - High Pressure 5 to 250 psig (0.4 to 17.2 bar)
- Temperature Rating 32°F to 175°F (0°C to 80°C)
- Low Temperature -4°F to 125°F (-20°C to 52°C)
- Weight 2.5 lb. (1.1 kg)

Materials of Construction

- Adjusting Stem Steel
- Body..... Zinc
- Bonnet, Piston Stem, Valve Poppet & Cap Plastic
- Collar, Knob..... Plastic
- Diaphragm Nitrile
- Seals Nitrile
- Springs – Poppet..... Stainless
- Control..... Steel





R119 Regulators – Standard




Features

- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet design for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Heavy duty tee handle adjustment
- Reverse flow version available
- Panel mount version available
- High flow: 1/4" – 100 SCFM§
 3/8" – 110 SCFM§
 1/2" – 150 SCFM§



X80 Reverse Flow Option

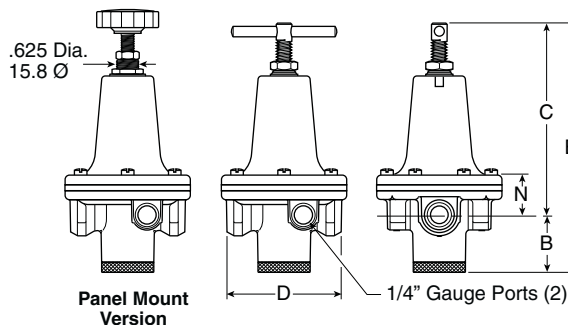

Port Size	NPT Relieving	BSPP Relieving
Without Gauge 0-125 PSIG Reduced Pressure		
1/4"	R119-02C	R119G02C
3/8"	R119-03C	R119G03C
1/2"	R119-04C	R119G04C
With Gauge 0-125 PSIG Reduced Pressure		
1/4"	R119-02CG	—
3/8"	R119-03CG	—
1/2"	R119-04CG	—


R119 Regulator Dimensions					
A	B	C	D	E	N
R119-02C, R119-03C					
3.00 (76)	1.38 (35)	5.29 (134)	2.74 (70.5)	6.67 (169)	.90 (24)
R119-04C					
3.56 (90)	1.56 (40)	5.34 (136)	3.25 (83)	6.90 (175)	1.45 (37)

inches (mm)

Standard part numbers shown bold.
 For other models refer to ordering information below.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 75 PSIG no flow secondary setting, and 20 PSIG pressure drop.

Ordering Information

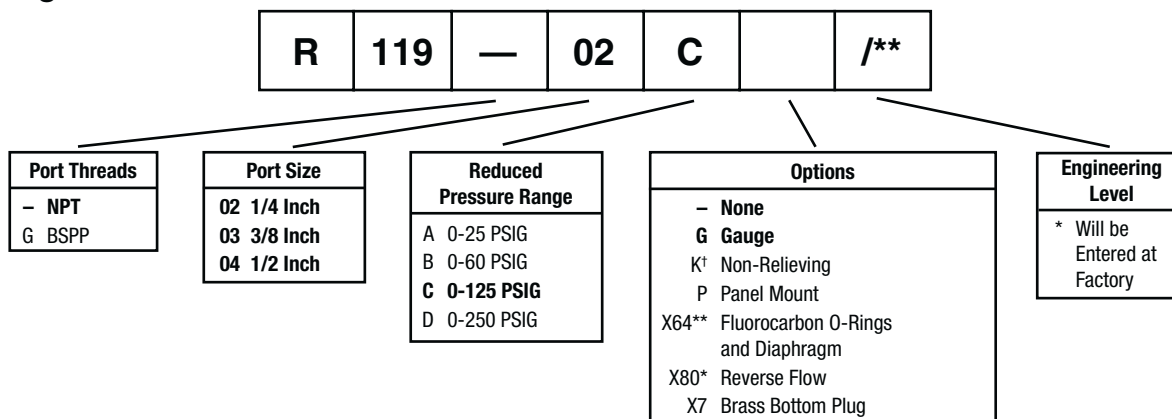

* Reverse flow for use downstream of control valves.

** Brass Bottom Plug Standard with X64 Option.


† Not available with 250 PSIG spring

BOLD ITEMS ARE MOST POPULAR.


Technical Specifications – R119

Technical Information


**Flow Characteristics
R119-02C**

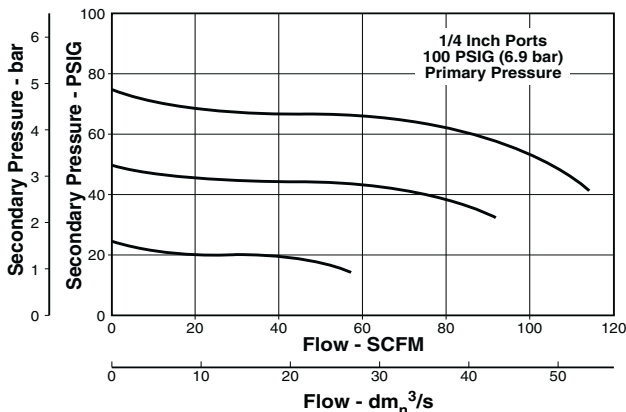

**Flow Characteristics
R119-03C**

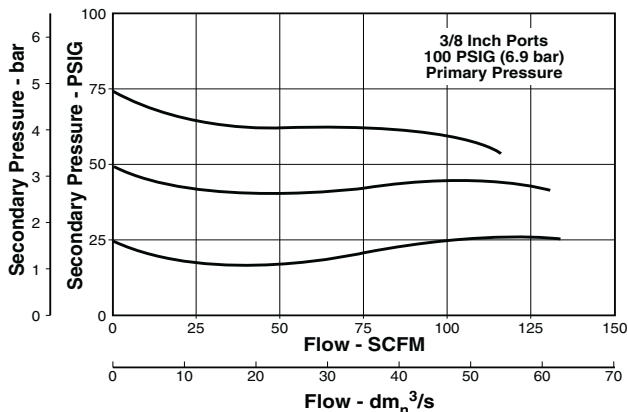

**Flow Characteristics
R119-04C**

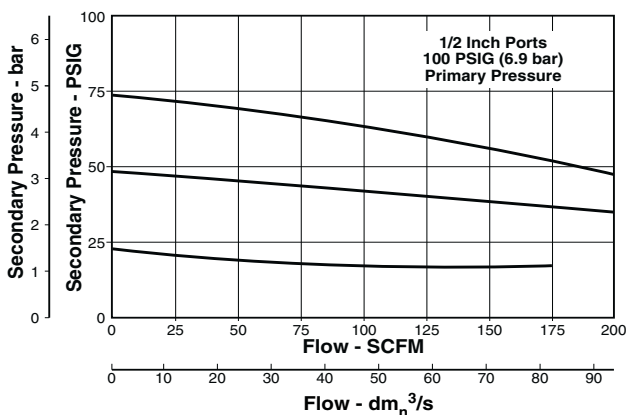

⚠ WARNING
Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

⚠ CAUTION:
REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

R119 Regulator Kits & Accessories

Gauges –

2" Dial Face

- 60 psig (0 to 4.1 bar)..... K4520N14060
- 160 psig (0 to 11.0 bar).....K4520N14160
- 300 psig (0 to 20.0 bar)..... K4520N14300

1-3/4" Digital Round Face

- 160 psig (0 to 11.0 bar)..... K4517N14160

Mounting Bracket Kit –

- 1/4", 3/8"..... SA15Y57
- 1/2"..... 18A57

Panel Mount Conversion Kit –

- 1/4", 3/8" 4202
- 1/2"..... 4204

Repair Kits –

- Non-Relieving Diaphragm,
Valve Assembly (1/4", 3/8"; All PSIG) RK118Y
- Relieving Diaphragm,
Valve Assembly (1/4", 3/8"; All PSIG) RK119Y
- Non-Relieving Diaphragm,
Valve Assembly (1/2"; 25, 60, 125 PSIG) RK118A
- Non-Relieving Diaphragm,
Valve Assembly (1/2"; 250 PSIG) RK118A250
- Relieving Diaphragm,
Valve Assembly (1/2"; 25, 60, 125 PSIG) RK119A

- Relieving Diaphragm,
Valve Assembly (1/2"; 250 PSIG) RK119A250
 - Spring Cage & T-Handle Kit (1/4 & 3/8).....RKC119Y
 - Spring Cage & Insert Only Kit (1/2)SAC18A3/BK
- For Fluorocarbon Repair Kits, add X64 to Kit Number suffix.

Specifications


- Gauge Ports (2)** 1/4 Inch
- Port Threads** 1/4, 3/8, 1/2 Inch
- Reduced Pressure Range**2 to 125 PSIG (0.15 to 8.5 bar)
- Supply Pressure** 300 PSIG Maximum (20.4 bar)
- Temperature Rating** 40°F to 125°F (4.4°C to 52°C)
- Weight –**
- R119-02, R119-03 1.8 lb. (0.82 kg) / Unit
26 lb. (11.79 kg) / 12-Unit Master Pack
- R119-04..... 3.2 lb. (1.45 kg) / Unit
27 lb. (12.25 kg) / 8-Unit Master Pack

Materials of Construction

- Adjusting Screw, Springs** Steel
- Body, Spring Cage**Zinc
- Bottom Plug** Nylon
- Innervalve** Brass
- Seals** Buna N




R119 Regulators – Hi-Flow



Features

- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet design for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Heavy duty tee handle adjustment
- Reverse flow version available
- High flow: 3/4" 300 SCFM
 1" 400 SCFM
 1-1/4" & 1-1/2" 500 SCFM

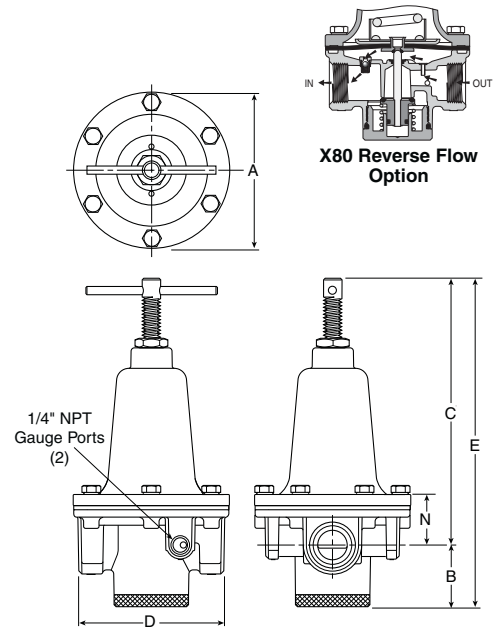

Port Size	NPT Relieving
Without Gauge 0-125 PSIG Reduced Pressure	
3/4"	R119-06C
1"	R119-08C
1-1/4"	R119-10C
1-1/2"	R119-12C
With Gauge 0-125 PSIG Reduced Pressure	
3/4"	R119-06CG
1"	R119-08CG
1-1/4"	R119-10CG
1-1/2"	R119-12CG

R119 Regulator Dimensions					
A	B	C	D	E	N
R119-06C, R119-08C					
4.69 (119)	1.87 (47)	8.15 (207)	4.38 (111)	10.02 (255)	1.61 (41)
R119-10C, R119-12C					
4.94 (125)	1.81 (46)	8.53 (217)	4.94 (125)	10.34 (263)	1.99 (50.6)

inches (mm)

⚠ WARNING
Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

Standard part numbers shown bold.
 For other models refer to ordering information below.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 75 PSIG no flow secondary setting, and 20 PSIG pressure drop.

Ordering Information



Port Threads
 – NPT
 G BSPP

Port Size
06 3/4 Inch
08 1 Inch
10 1-1/4 Inch
12 1-1/2 Inch

Reduced Pressure Range
C 0-125 PSIG
D 0-250 PSIG

Options
 – None
G Gauge
 K Non-Relieving
 X64** Fluorocarbon O-Rings and Diaphragm
 X80* Reverse Flow
 X7 Brass Bottom Plug

Engineering Level
 * Will be Entered at Factory

* Reverse flow for use downstream of control valves.

** Brass Bottom Plug Standard with X64 Option.


BOLD ITEMS ARE MOST POPULAR.




Technical Specifications – R119

Technical Information


**Flow Characteristics
R119-06C**

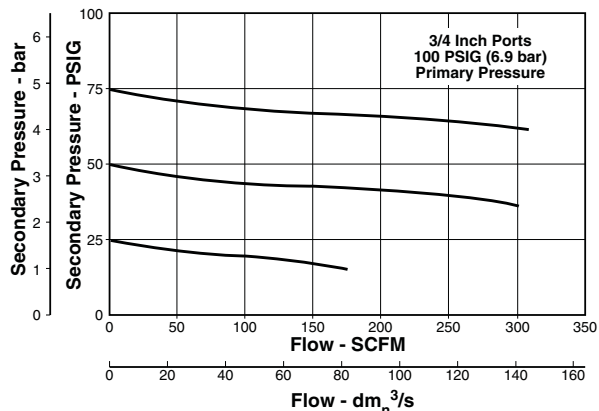


**Flow Characteristics
R119-08C**

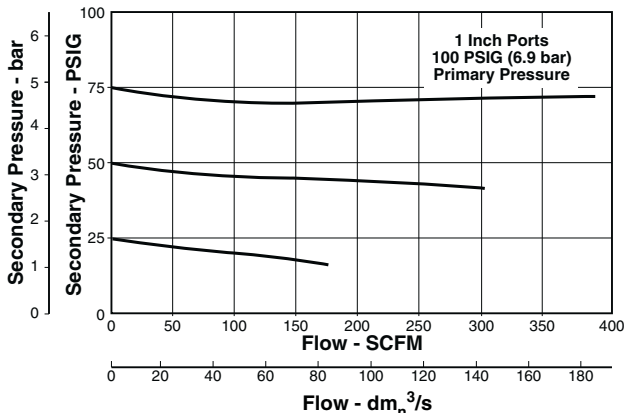

**Flow Characteristics
R119-10C**

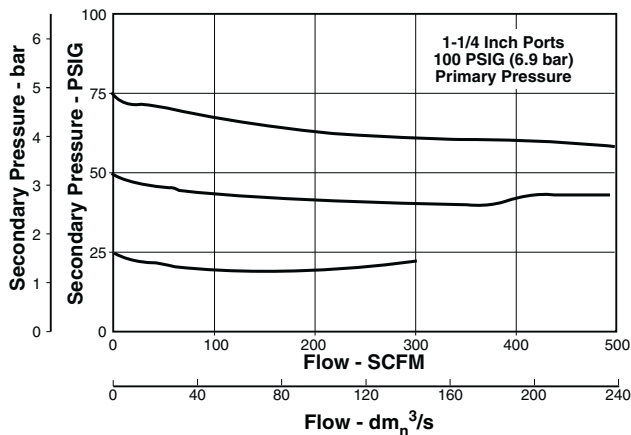

**Flow Characteristics
R119-12C**

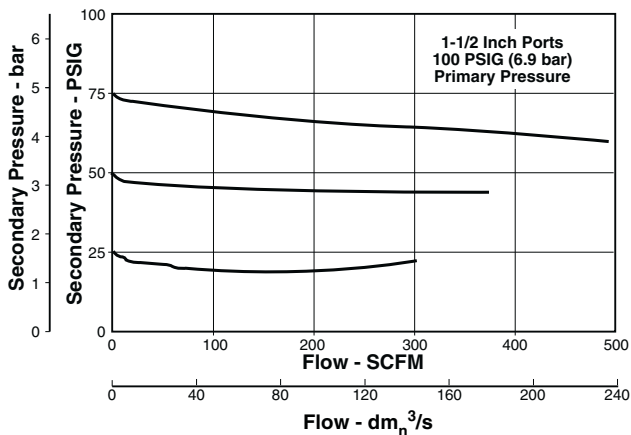

R119 Regulator Kits & Accessories

Gauges –

2" Dial Face

- 60 psig (0 to 4.1 bar)..... K4520N14060
- 160 psig (0 to 11.0 bar).....K4520N14160
- 300 psig (0 to 20.0 bar)..... K4520N14300

1-3/4" Digital Round Face

- 160 psig (0 to 11.0 bar)..... K4517N14160

Mounting Bracket Kit 18B57

Repair Kits –

- Non-Relieving Diaphragm,
Valve Assembly (3/4", 1") RK118B
- Non-Relieving Diaphragm,
Valve Assembly (1-1/4", 1-1/2") RK118D
- Relieving Diaphragm,
Valve Assembly (3/4", 1") RK119B
- Relieving Diaphragm,
Valve Assembly (1-1/4", 1-1/2") RK119D

For Fluorocarbon Repair Kits, add X64 to Kit Number suffix.

Specifications

- Gauge Ports (2) 1/4 Inch
- Port Threads 3/4, 1, 1-1/4, 1-1/2 Inch
- Reduced Pressure Range 2 to 125 PSIG (0.15 to 8.5 bar)
- Supply Pressure 300 PSIG Maximum (20.4 bar)
- Temperature Rating 40°F to 125°F (4.4°C to 52°C)
- Weight –
 - R119-06, R119-08 6.2 lb. (2.81 kg) / Unit
25 lb. (11.34 kg) / 4-Unit Master Pack
 - R119-10, R119-12 7.2 lb. (3.27 kg) / Unit
29 lb. (13.15 kg) / 4-Unit Master Pack

Materials of Construction

- Adjusting Screw, Springs Steel
- Body, Spring CageZinc
- Bottom Plug, Inner Valve Brass
- Seals Buna N




09R Regulators – Hi-Flow



Features

- Piston design for reduced downtime
- High flow
- Balanced poppet for quick and accurate regulation
- Two full flow 1/4" gauge ports which can be used as additional outlets
- Self relieving piston standard
- High flow: 2" – 1000 SCFM§

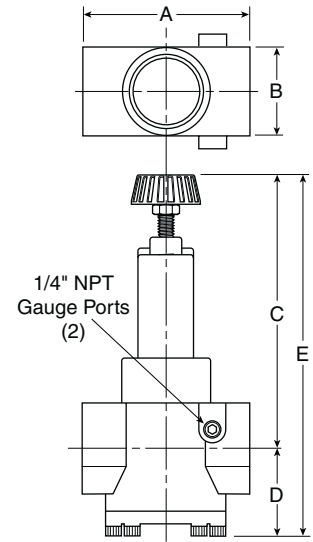

Port Size	NPT
Without Gauge	
2"	09R813B*

09R Regulator Dimensions				
A	B	C	D	E
5.30 (135)	3.60 (91)	9.10 (231)	2.80 (71)	11.90 (302)


Inches (mm)

Standard part numbers shown bold.

For other models refer to ordering information below.

§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 90 PSIG no flow secondary setting and 10 PSIG pressure drop.


Ordering Information

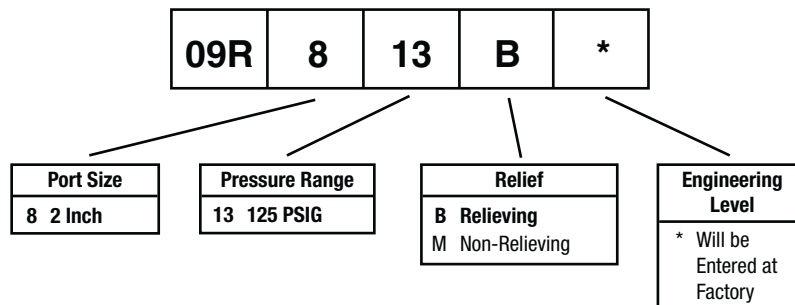

BOLD ITEMS ARE MOST POPULAR.

Technical Specifications – 09R

Technical Information

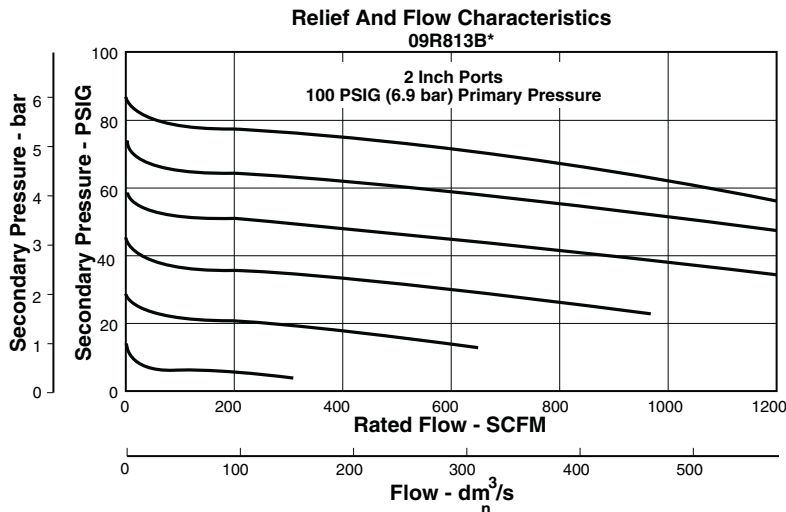

⚠ WARNING

**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.**

⚠ CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

09R Regulator Kits & Accessories

- Body Service Kit PS603
- Gauges –
 - 2" Dial Face
 - 160 psig (0 to 11.0 bar) K4520N14160
 - 300 psig (0 to 20.0 bar) K4520N14300
 - 1-3/4" Digital Round Face
 - 160 psig (0 to 11.0 bar) K4517N14160
- Mounting Bracket Kit PS605
- Service Kit –
 - Non-Relieving PS604
 - Relieving PS626
- Springs –
 - 2-125 PSIG Range PS602


Specifications

- Gauge Ports (2) 1/4 Inch
(Can be used as additional Full Flow 1/4 Inch Outlet Ports)
- Port Threads 2 Inch
- Primary Pressure Rating –
 - Maximum Primary Pressure 250 PSIG (17.2 bar)
- Secondary Pressure Range – 10 to 125 PSIG (0.7 to 8.6 bar)
- Temperature Rating 32°F to 150°F (0°C to 66°C)
- Weight 10.82 lb. (53 kg)

Materials of Construction



- Adjusting Stem & Springs Steel
- Body Zinc Alloy, Die Cast
- Bonnet, Piston Stem, Valve Poppet & Cap Aluminum
- Piston, Cap Plastic
- Seals Nitrile

R119 – Pilot Operated Regulators



Features

- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet and constant bleed pilot for quick and accurate regulation.
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Reverse flow available
- High flow: 1/4" - 100 SCFM[§]
 3/8" - 110 SCFM[§]
 1/2" - 150 SCFM[§]

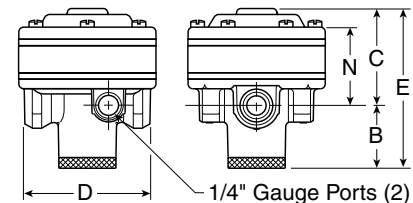

Port Size	NPT Relieving	BSPP Relieving
Without Gauge 0-125 PSIG Reduced Pressure		
1/4"	R119-02J	R119G02J
3/8"	R119-03J	R119G03J
1/2"	R119-04J	R119G04J

R119 Regulator Dimensions					
A	B	C	D	E	N
R119-02J, R119-03J					
3.00 (76)	1.38 (35)	1.98 (50)	2.74 (70)	3.55 (90)	1.57 (40)
R119-04J					
3.56 (90)	1.56 (40)	2.33 (59)	3.25 (83)	3.90 (99)	1.91 (49)


inches
(mm)

Standard part numbers shown bold.
 For other models refer to ordering information below.
 § SCFM = Standard Cubic Feet Per Minute at 100 PSIG Inlet, 75 PSIG No Flow Secondary Setting, and 20 PSIG Pressure Drop.

⚠ WARNING

**Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.**

Ordering Information

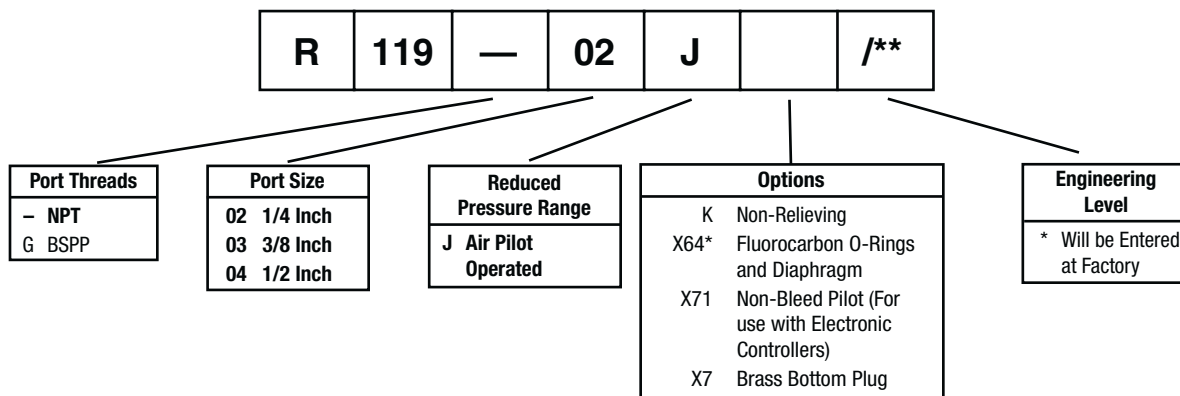


* Brass Bottom Plug Standard with X64 Option.

BOLD ITEMS ARE MOST POPULAR.


Technical Specifications – R119

Technical Information


**Flow Characteristics
R119-02J**

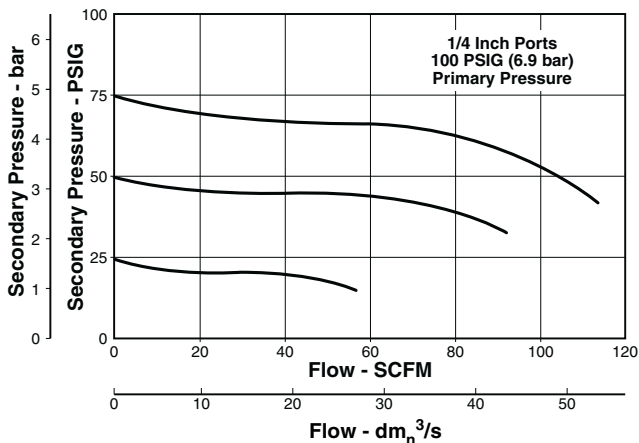

**Flow Characteristics
R119-03J**

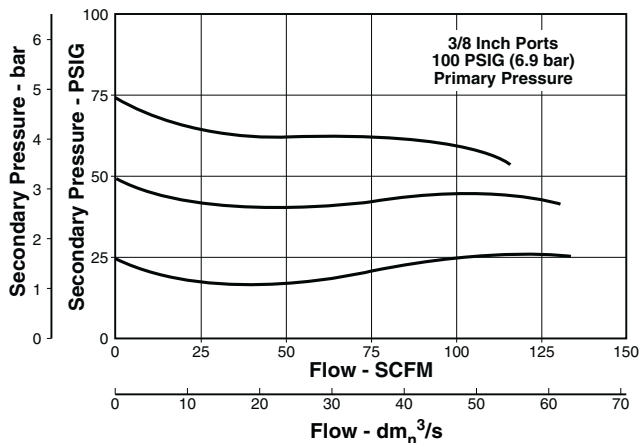

**Flow Characteristics
R119-04J**

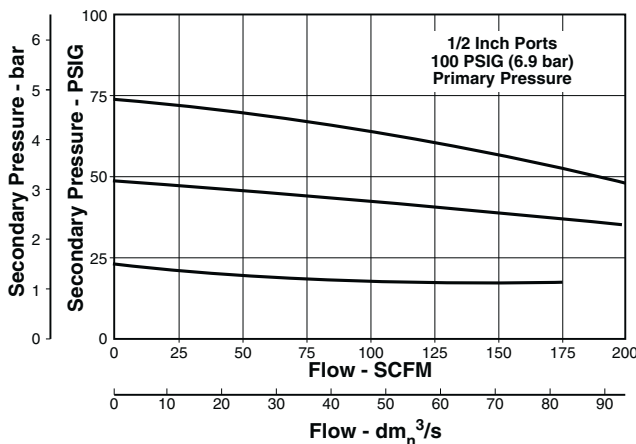

R119 Regulator Kits & Accessories

Gauges –

2" Dial Face

- 60 psig (0 to 4.1 bar)..... K4520N14060
- 160 psig (0 to 11.0 bar).....K4520N14160
- 300 psig (0 to 20.0 bar)..... K4520N14300

1-3/4" Digital Round Face

- 160 psig (0 to 11.0 bar)..... K4517N14160

Repair Kits –

- Non-Relieving Diaphragm,
Valve Assembly (1/2") RK118X20A
- Non-Relieving Diaphragm,
Valve Assembly (1/4", 3/8") RK118X20Y
- Relieving Diaphragm,
Valve Assembly (1/2") RK119X20A
- Relieving Diaphragm,
Valve Assembly (1/4", 3/8") RK119X20Y

For Fluorocarbon Repair Kits, add X64 to Kit Number suffix.

For Non-Bleed Pilot Repair Kits, add X71 to Kit Number suffix.

Specifications


- Gauge Ports (2)** 1/4 Inch
- Port Threads** 1/4, 3/8, 1/2 Inch
- Pilot Port –**
 - 1/4 & 3/8" Threads 1/8"
 - 1/2" Threads..... 1/4"
- Reduced Pressure Range –**
 - Adjustable to within 5 to 7 PSIG of Supply Pressure
- Supply Pressure** 300 PSIG Maximum (20.4 bar)
- Air Consumption –**
 - Constant bleed from air pilot chamber: approx. 0.17 SCFM (10 SCFH)
- Temperature Rating** 40°F to 125°F (4.4°C to 52°C)
- Weight –**
 - R119-02J, R119-03J 1.6 lb. (0.73 kg) / Unit
19 lb. (8.62 kg) / 12-Unit Master Pack
 - R119-04J 2.6 lb. (1.18 kg) / Unit
21 lb. (9.53 kg) / 8-Unit Master Pack

Materials of Construction

- Body, Ring, Top Plate**Zinc
- Bottom Plug** Nylon
- Innervalve** Brass
- Seals** Buna N




R119 – Pilot Operated Regulators



Features

- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Diaphragm operated design with balanced poppet and constant bleed pilot for quick and accurate regulation
- Secondary aspiration plus balanced poppet provides quick response and accurate pressure regulation
- Reverse flow version available
- High flow: 3/4" & 1" – 300 SCFM§
 1-1/4" & 1-1/2" – 500 SCFM§

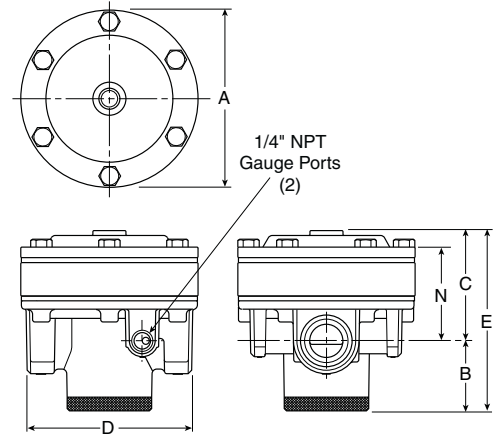

Port Size	NPT
	Relieving
Without Gauge 0-125 PSIG Reduced Pressure	
3/4"	R119-06J
1"	R119-08J
1-1/4"	R119-10J
1-1/2"	R119-12J

R119-06J, R119-08J Pilot Regulator Dimensions					
A	B	C	D	E	N
4.72 (120)	1.87 (47)	2.94 (75)	4.38 (111)	4.81 (122)	2.47 (63)
R119-10J, R119-12J Pilot Regulator Dimensions					
A	B	C	D	E	N
4.94 (125)	1.81 (46)	3.32 (84)	4.94 (125)	5.13 (130)	2.88 (736)

inches (mm)

Standard part numbers shown bold.


For other models refer to ordering information below.

§ SCFM = Standard Cubic Feet Per Minute at 100 PSIG Inlet, 75 PSIG No Flow Secondary Setting, and 20 PSIG Pressure Drop.

⚠ WARNING

**Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.**

Ordering Information

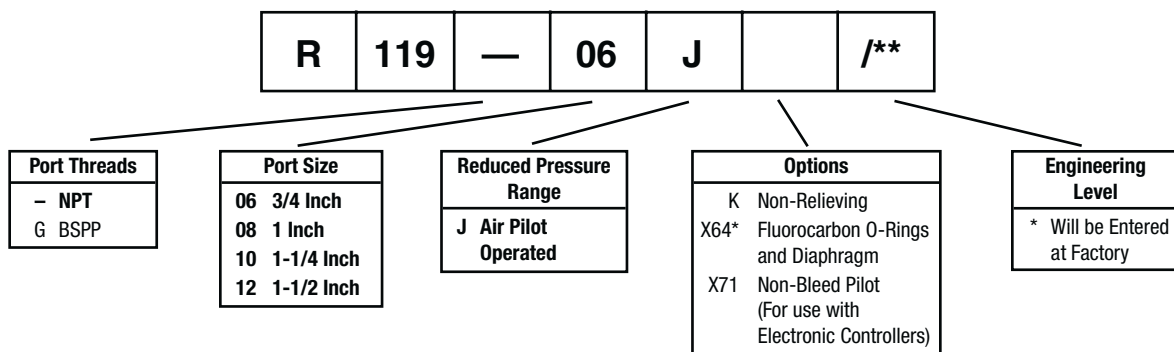


* Brass Bottom Plug Standard with X64 Option.

BOLD ITEMS ARE MOST POPULAR.


Technical Specifications – R119

Technical Information


**Flow Characteristics
R119-06J**

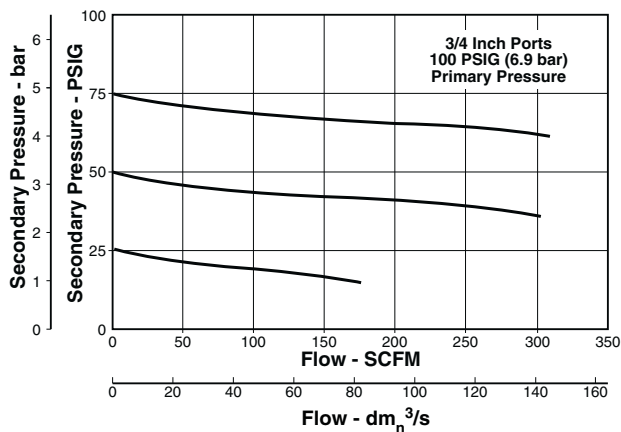


**Flow Characteristics
R119-08J**

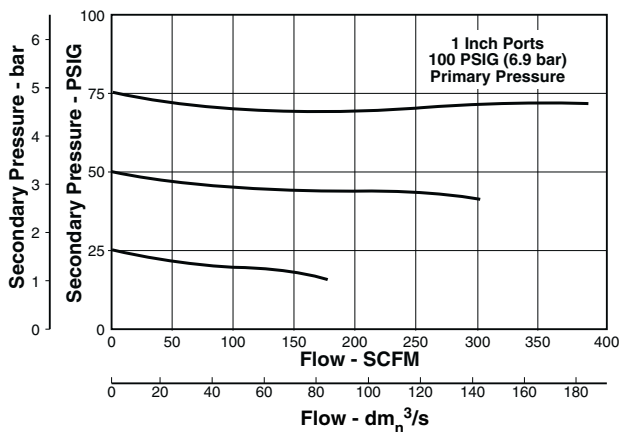

**Flow Characteristics
R119-10J**

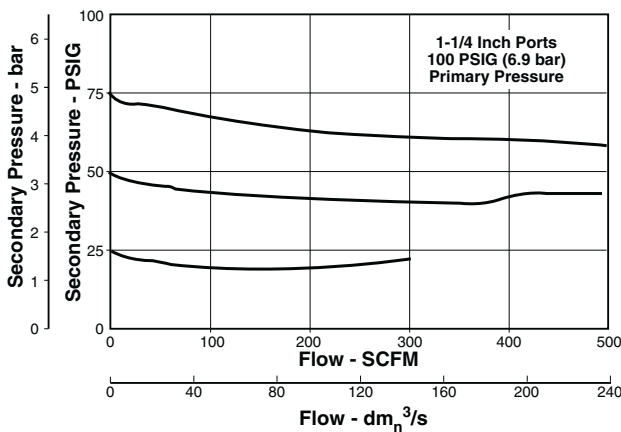

**Flow Characteristics
R119-12J**

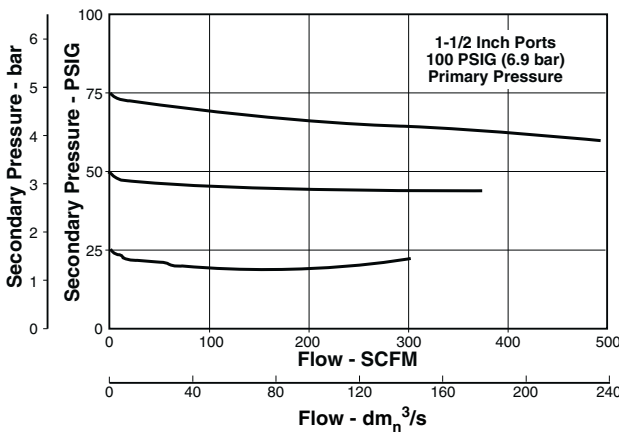

R119 Regulator Kits & Accessories

Gauges –

2" Dial Face

- 60 psig (0 to 4.1 bar)..... K4520N14060
- 160 psig (0 to 11.0 bar).....K4520N14160
- 300 psig (0 to 20.0 bar)..... K4520N14300

1-3/4" Digital Round Face

- 160 psig (0 to 11.0 bar)..... K4517N14160

Repair Kits –

- Non-Relieving Diaphragm,
Valve Assembly (3/4", 1") RK118X20B
- Non-Relieving Diaphragm,
Valve Assembly (1-1/4", 1-1/2") RK118X20D
- Relieving Diaphragm,
Valve Assembly (3/4", 1") RK119X20B
- Relieving Diaphragm,
Valve Assembly (1-1/4", 1-1/2")RK119X20D

For Fluorocarbon Repair Kits, add X64 to Kit Number suffix.

For Non-Bleed Pilot Repair Kits, add X71 to Kit Number suffix.

Specifications


- Gauge Ports (2)1/4 Inch
- Port Threads 3/4, 1, 1-1/4, 1-1/2 Inch
- Reduced Pressure Range –
Adjustable to Within 5 to 7 PSIG of Supply Pressure
- Supply Pressure 300 PSIG Maximum (20.4 bar)
- Air Consumption –
Constant Bleed from Air Pilot Chamber:
Approximately 0.17 SCFM (10 SCFH)
- Temperature Rating 40°F to 125°F (4.4°C to 52°C)
- Weight –
R119-06J, R119-08J 5.2 lb. (2.36 kg) / Unit
42 lb. (19.05 kg) / 8-Unit Master Pack
R119-10J, R119-12J 5.6 lb. (2.54 kg) / Unit
46 lb. (20.87 kg) / 8-Unit Master Pack

Materials of Construction

- Body, Ring, Top PlateZinc
- Bottom Plug, Innervale Brass
- Seals Buna N




R119 – Pilot Operated Regulators



Features

- Adapted for control by a remote or distant small pilot regulator. Ideal for maximum capacity requirements in applications where units are not readily accessible
- High flow performance featuring rugged design for the most demanding applications
- Ideal for those installations calling for constant pressure with wide variation in flow
- Piston operated design with balanced poppet and dual constant bleed for quick and accurate regulation
- High flow: 2" & 2-1/2" – 1800 SCFM[§]

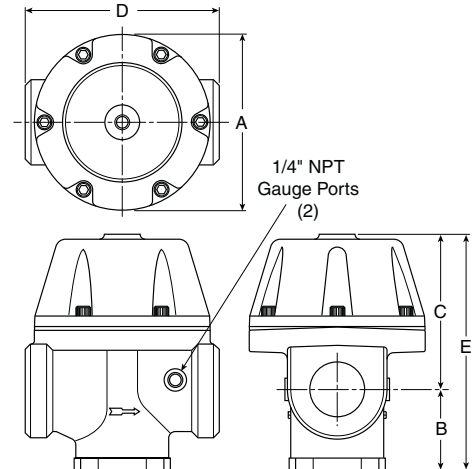

Port Size	NPT
	Relieving
Without Gauge 0-125 PSIG Reduced Pressure	
2"	R119-16J
2-1/2"	R119-20J

R119-16J, R119-20J Pilot Regulator Dimensions				
A	B	C	D	E
6.63 (168)	3.09 (79)	7.78 (147)	7.31 (185)	10.87 (276)

inches (mm)

Standard part numbers shown bold.


For other models refer to ordering information below.

§ SCFM = Standard Cubic Feet Per Minute at 100 PSIG Inlet, 75 PSIG No Flow Secondary Setting, and 20 PSIG Pressure Drop.

WARNING

**Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.**


Ordering Information

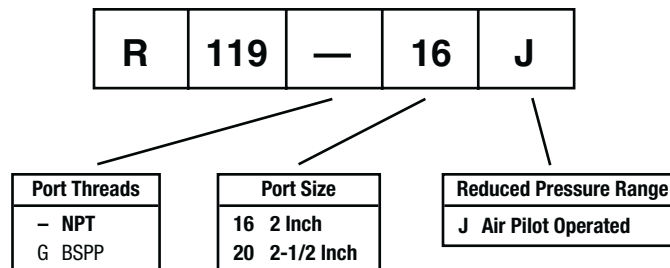

NOTE: Non-Relieving Not Available.

BOLD ITEMS ARE MOST POPULAR.

Technical Information

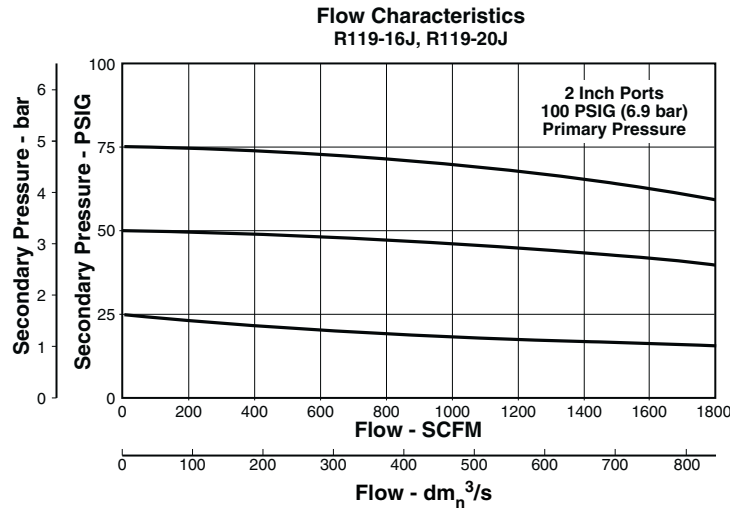

R119 Regulator Kits & Accessories

Gauges –

2" Dial Face

- 60 psig (0 to 4.1 bar)..... K4520N14060
- 160 psig (0 to 11.0 bar).....K4520N14160
- 300 psig (0 to 20.0 bar)..... K4520N14300

1-3/4" Digital Round Face

- 160 psig (0 to 11.0 bar)..... K4517N14160

Repair Kits –

- Piston Type Regulation (2", 2-1/2")RK119G
- Piston & Cylinder Kit.....SA119-0291
- Cylinder Only Kit.....118F29

Specifications

- Gauge Ports (2)** 1/4 Inch
(Can be used for Full Flow)
- High Pressure Outlet for Pilot (Not seen in photo) 1/4 Inch
- Port Threads**2, 2-1/2 Inch
- Reduced Pressure Range –**
Adjustable to Within 5 to 7 PSIG of Supply Pressure
- Supply Pressure**300 PSIG Maximum (20.4 bar)
- Air Consumption –**
Constant Bleed from Air Pilot Chamber:
Approximately 0.17 SCFM (10 SCFH)
- Constant Bleed from Reduced Pressure:
Approximately 0.17 SCFM (10 SCFH)
- Temperature Rating** 40°F to 120°F (4.4°C to 48.9°C)
- Weight –**
R119-16J, R119-20J 11 lb. (4.99 kg) / Unit
12 lb. (5.44 kg) / 1-Unit Master Pack

Materials of Construction

- Body, Piston**Aluminum
- Seals**Buna N
- Innervalve**.....Brass & Stainless

Filter / Regulators

- Pipe Sizes 1/8 thru 1-1/2 Inch
- Flows to 200 SCFM
- Pressures to 250 psig

Integral Filter / Regulators are an excellent choice where accurate pressure regulation and high moisture removal efficiency are required in a space saving package.

Filter / Regulator Selection

1. Determine maximum system flow requirements.
2. Determine maximum allowable pressure drop at rated flow in SCFM.
3. Refer to flow chart and select filter/regulator by choosing the curve that offers minimum pressure drop at desired flow in SCFM.

Reading Flow Charts to Size Filter / Regulators

Once the required flow is determined for a pneumatic application the regulator or filter/regulator can be selected by using the flow chart. The chart serves two different purposes. To read the flow, use the right side of the chart. To read the relief characteristics use the left side of the chart. When reading the flow chart, first determine the secondary pressure that will be used. Find the appropriate pressure curve on the graph. Given an acceptable pressure drop for an application, follow the flow curve until it intersects the pressure drop point. This will give the flow at that particular pressure drop.

WARNING

**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.**



CAUTION:

REGULATOR PRESSURE ADJUSTMENT – T

T


F

Warning


The plastic material used to manufacture the plastic bowls, and the sight gauge on metal bowls, may be attacked by certain chemicals. Do not use this filter regulator on systems with air supplied by a compressor lubricated with synthetic oils or oils containing phosphate esters or chlorinated hydrocarbons. These oils can carry over into the air lines and chemically attack and possibly rupture the bowl or sight gauge. Also, do not expose the bowl or sight gauge to materials such as carbon tetrachloride, trichlorethylene, acetone, paint thinner, cleaning fluids, or other harmful materials, for they too will cause the plastic to craze and/or rupture. For use in environments where these, or any, chemicals may be present, consult the factory for approval.

Filter / Regulators

Turning the adjusting knob clockwise applies a load to control spring which forces the piston / diaphragm and valve poppet assembly to move downward allowing filtered air to flow through the seat area created between the poppet assembly and the seat. "First stage filtration" begins when air pressure supplied to the inlet port is directed through deflector plate causing a swirling centrifugal action forcing liquids and coarse particles to the inner bowl wall and down below the lower baffle to the quiet zone. After liquids and large particles are removed in the first stage of filtration "second stage filtration" occurs as air flows through element where smaller particles are filtered out and retained. The air flow now passes through seat area to the outlet port of the unit. Pressure in the downstream line is sensed below the piston / diaphragm and offsets the load of control spring. When downstream pressure reaches the set-point, poppet valve assembly and piston / diaphragm move upward closing seat area. Should downstream pressure exceed the desired regulated pressure, the excess pressure will cause the piston / diaphragm to move upward opening vent hole venting the excess pressure to atmosphere through the hole in the bonnet. (This occurs in the standard relieving type regulator only.)

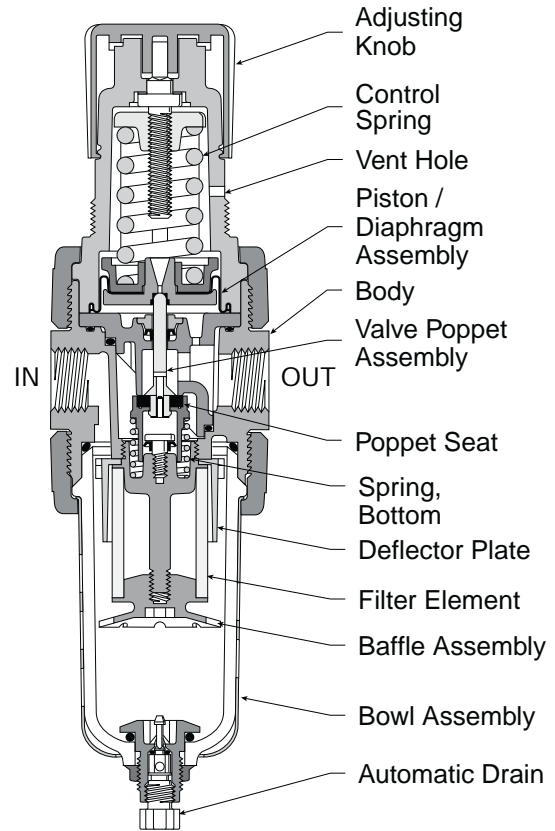


Semi Automatic Drain



(Overnight Drain)

This drain offers a semi-automatic function when there is a differential pressure in the filter which occurs when system pressure is shut off. The drain can also be used manually by gripping it with your fingertips and pushing upward.


Automatic Pulse Drain



(Spitter Drain)


The diaphragm in this drain pulses when there is a pressure differential such as a valve cycling or cylinder stroking downstream. This action flexes the diaphragm and allows the filter to drain the entrapped water.

Automatic Float Drain



The float internal to this drain rises with increased liquid level. When the float rises, it opens a seat area allowing the trapped liquids to drain through the bottom. A manual override can be pushed in the bottom of the drain to unseat the float if particulates create a block.

14E Filter / Regulator – Miniature




Features

E
U

N
T

CF
CF

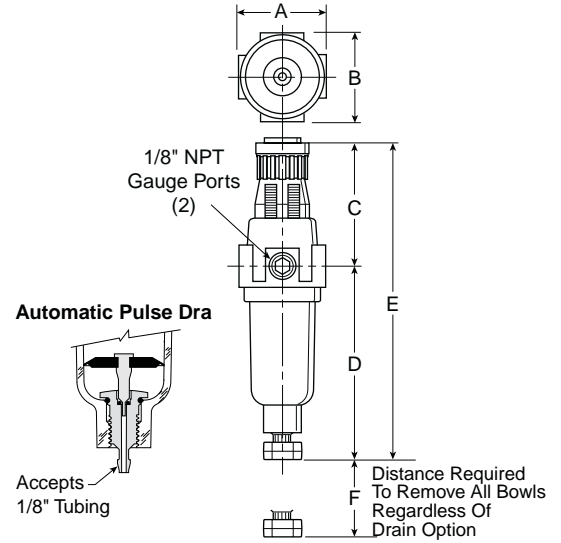

Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
B	14E01B13F*	14E05B13F*
	14E11B13F*	14E15B13F*
B	14E03B13F*	14E07B13F*
	14E13B13F*	14E17B13F*


A	B	C
D	D [†]	E
E [†]	F	

Standard part numbers shown bold.
For other models refer to ordering information below.
NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
‡ For polycarbonate bowl see Caution on page inside cover.
§ SCFM = Standard cubic feet per minute at 100 PSIG inlet, 90 PSIG no flow secondary setting and 10 PSIG pressure drop.

I A D

Ordering Information

BOLD ITEMS ARE MOST POPULAR.



Port Size
0 1/8 Inch
1 1/4 Inch

Elements
A 40 Micron
B 5 Micron
Z Adsorber

Relief
F Relieving
G Non-Relieving
H Low Temp. Relieving

Port Type
Blank NPT
1 BSPP
2 BSPT

Preset / Pressure Limited	
Blank	None
XXX*	Preset Pressure
XXX*	Pressure Limited

Bowl Options
Polycarbonate Bowl
1 Twist Drain
5 Automatic Drain
Metal Bowl
3 Twist Drain
7 Automatic Drain

Pressure Range	
Without Gauge	With Gauge
10 30 PSIG	15 30 PSIG
11 60 PSIG	16 60 PSIG
12 15 PSIG	17 15 PSIG
13 125 PSIG	18 125 PSIG

Engineering Level
* Will be Entered at Factory

Options	
Blank	No Options
L [†]	Preset Non-Adjustable
p [†]	Preset Adjustable
S [†]	Pressure Limiter Max. Adjustable
T [†]	Pressure Limiter Max.

* Available Preset / Pressure Limited Range, 10 to 90 PSIG in 5 PSIG increments. For higher pressures, contact factory.
(Example: 065 = 65 PSIG)



Spring Type by Preset / Limited Pressure:

F I
F I
F I

† Inlet Pressure is 100 PSIG. For other pressures, contact factory.



Technical Information

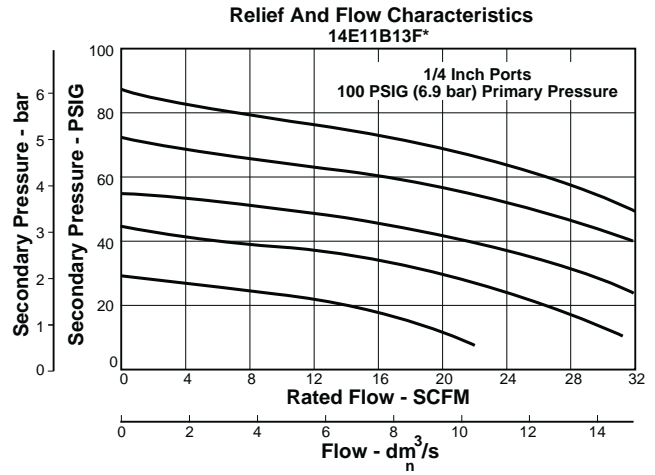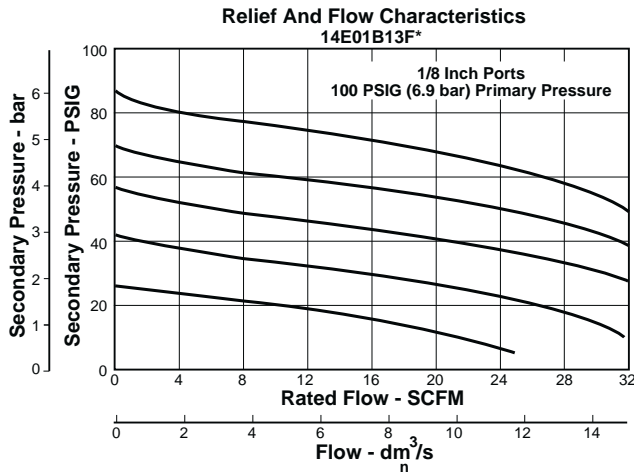

⚠ WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

14E Filter / Regulator Kits & Accessories

- Bowl Kits –
- B A D B
 - T D
 - B A D B
 - T D
- Filter Element Kits –
- A
- Gauges –
- I N
 - I N
 - I N
- Mounting Bracket Kit* I N B
- Panel Mount Nut*
- Poppet / Piston Kits – Unbalanced Non-RelievingPS428
- Unbalanced RelievingPS426
- Springs –
- I B
 - I
 - I

Specifications

- Automatic Pulse Drain Tube Barb I
- Bowl Capacity O
- Gauge Ports (2) C F F I
- Port Threads I

T N

Pressure & Temperature Ratings –

	B				
	I	F	F	C	C
B					
	I	F	F	C	C

Secondary Pressure Ranges –

I
I
I

Weight

Materials of Construction

- Adjusting Nut B
- Adjusting Stem & Spring Steel
- Body Zinc
- Bonnet, Knob, Seat, Piston, Holder & Deflector Plastic
- Bowls Available –

 - Transparent Polycarbonate
 - Metal (Without Sight Gauge) Zinc

- Drains – Manual – Twist Type
- Body & Stem Plastic
- Seals Nitrile
- Automatic – Pulse Type

 - Piston & Seals Nitrile
 - Stem, Seat, Adaptor & Washers Aluminum


- Filter Elements – 5 Micron (Standard)

 - Plastic –

 - 40 Micron (Optional) Plastic
 - Adsorber (Optional) Activated Charcoal


- Seals Nitrile

B34 Filter / Regulator – Miniature



Features

- E
- D
- B
- N
- High flow: 1/8" – 12 SCFM[§]
1/4" – 12 SCFM[§]

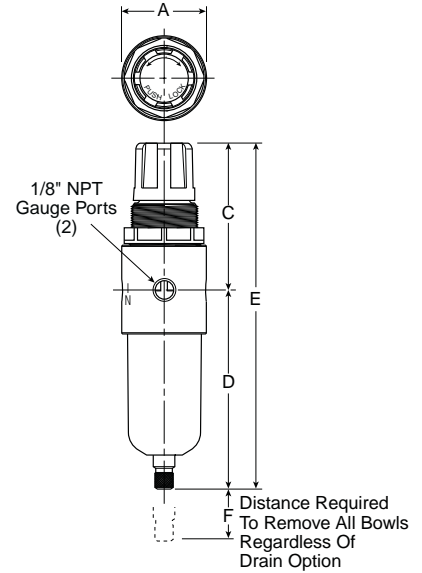


Port Size	NPT
	Manual Twist Drain
B	
	B344-01AGC
	B344-02AGC
B	
	B344-01DGC
	B344-02DGC

Standard part numbers shown bold.
For other models refer to ordering information below.
 NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
 ‡ For polycarbonate bowl see Caution on page inside cover.
 § SCFM = Standard cubic feet per minute at 100 PSIG inlet,
 75 PSIG no flow secondary setting and 25% pressure drop.

A	C	D
E	F	

Standard part numbers shown bold.
For other models refer to ordering information below.
 NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
 ‡ For polycarbonate bowl see Caution on inside cover.
 § SCFM = Standard cubic feet per minute at 100 PSIG inlet,
 75 PSIG no flow secondary setting and 25% pressure drop.



Ordering Information

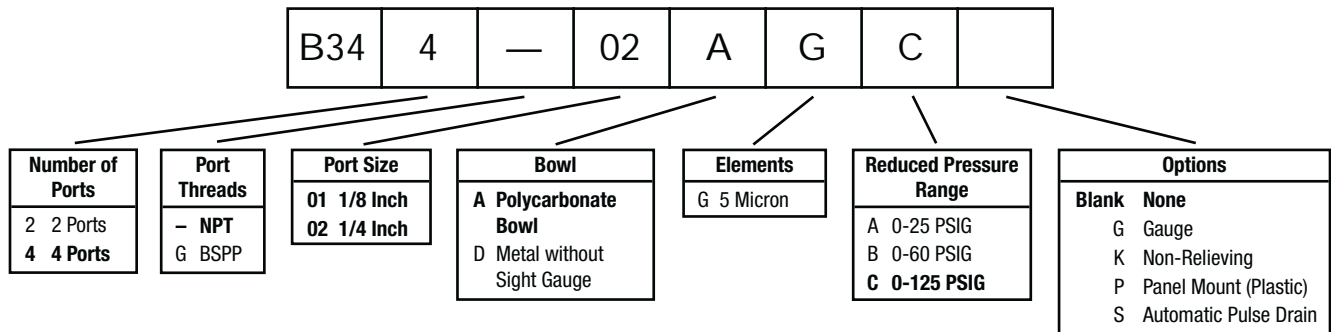

BOLD ITEMS ARE MOST POPULAR.



Technical Information

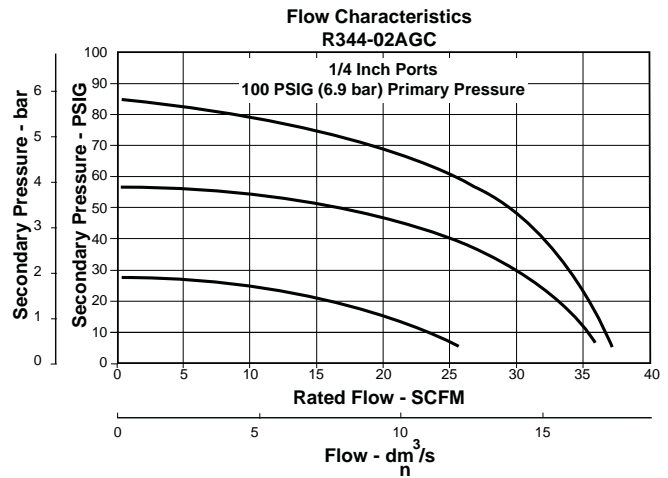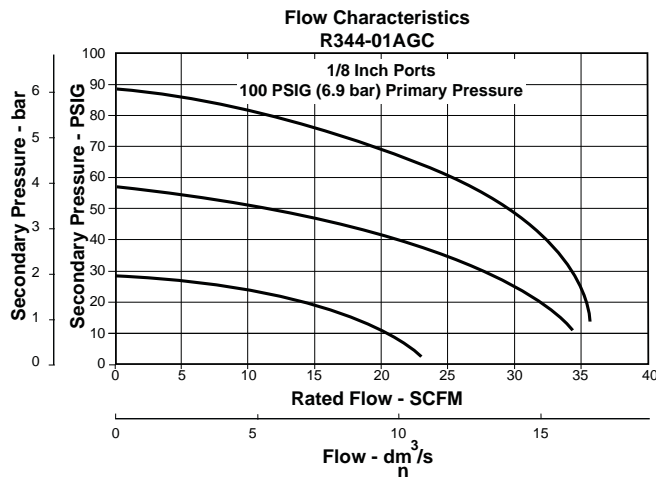

⚠ WARNING
 Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

B34 Filter / Regulator Kits & Accessories

- Adjusting Knob.....RRP-16-005-000
- Bowl Kits –
 - Zinc (D) BK505Y
 - Zinc with Automatic Pulse Drain (D)..... BK505SY
 - Polycarbonate (A) BK504Y
 - Polycarbonate with Automatic Pulse Drain (A)..... BK504SY
- Drain Kits –
 - Automatic Pulse Drain
 (Maximum Pressure = 175 PSIG) RK504SY
- Filter Element Kits –
 - 5 Micron (All).....FRP-96-729
- Gauges –
 - 1-1/2" Dial Size, 1/8" Back Connection
 0 to 60 PSIG (0 to 400 kPa)..... K4515N18060
 - 1-1/2" Dial Size, 1/8" Back Connection
 0 to 160 PSIG (0 to 1100 kPa)..... K4515N18160
- Mounting Bracket Kit (Includes Plastic Panel Nut)SA161X57
- Panel Mount Nut –
 - Plastic.....R05X51-P
 - AluminumR05X51-A
- Repair Kits –
 - Non-Relieving Diaphragm, Valve Assembly (All) GRP-96-726
 - Relieving Diaphragm, Valve Assembly (All) GRP-96-725
- Springs – 0-25 GRP-95-111
 0-60 GRP-96-718
 0-125 GRP-96-717


Specifications

- Bowl Capacity 1 Ounce
- Gauge Ports (2) 1/8 Inch
- Maximum Pressure –
 - Zinc Bowl (D) 0 to 300 PSIG
 - Polycarbonate Bowl (A) 0 to 150 PSIG
- Reduced Pressure Range –
 - 0 to 25 PSIG (0 to 1.7 bar) (A)
 - 0 to 60 PSIG (0 to 4.1 bar) (B)
 - 2 to 125 PSIG (0.15 to 8.5 bar) (C)
- Temperature Rating 40°F to 125°F (4.4°C to 52°C)
- Port Threads 1/8 & 1/4 Inch
- Weight –
 - Zinc Bowl (D) 0.6 lb. (0.27 kg) / Unit
 12 lb. (5.44 kg) / 24-Unit Master Pack
 - Polycarbonate Bowl (A) 0.3 lb. (0.14 kg) / Unit
 6 lb. (2.72 kg) / 24-Unit Master Pack

Materials of Construction

- Adjusting Knob Acetal
- Body Aluminum
- Bowls –
 - Polycarbonate (A) Polycarbonate
 - Metal (D) Zinc
 Zinc with Automatic Pulse Drain
- Elastomers Buna N
- Filter Element Sintered Polyethylene
- Filter Retainer, Vane Plate Acetal
- Internvalve, Diaphragm, Button, Drain Brass

B548 Filter / Regulator – Miniature




Features

E
 U

N

CF

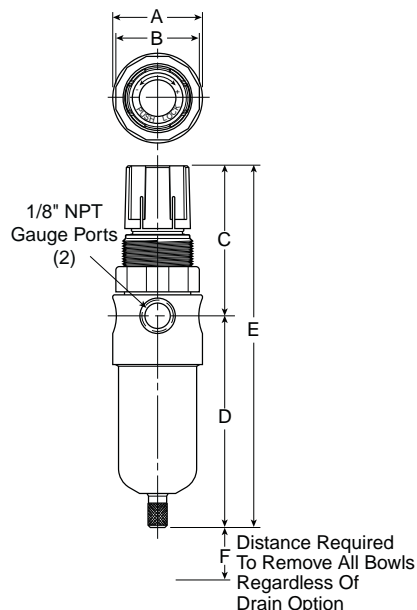

Port Size	NPT
	Manual Twist Drain
B	
	B548-01AHC
	B548-02AHC
B	
	B548-01DHC
	B548-02DHC

B548 Filter / Regulator Dimensions		
A	B	C
D	E	F

Standard part numbers shown bold.
 For other models refer to ordering information below.
 NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
 ‡ For polycarbonate bowl see Caution on page inside cover.
 § SCFM = Standard cubic feet per minute at 100 PSIG inlet,
 75 PSIG no flow secondary setting and 25% pressure drop.

Ordering Information



Port Threads
— NPT
G BSPP

Port Size
01 1/8 Inch
02 1/4 Inch

Bowl
A Polycarbonate Bowl
D Metal without Sight Gauge

Elements
G 5 Micron
H 20 Micron

Reduced Pressure Range
A 0-25 PSIG
B 0-60 PSIG
C 0-125 PSIG

Options
G Gauge
K Non-Relieving
P Panel Mount (Plastic)
S Automatic Pulse Drain
T Tamperproof
U Semi-Auto Drain
X64 Fluorocarbon O-rings & Diaphragm
X33* Polyurethane Bowl


Engineering Change Designator
Will be entered at factory.

BOLD ITEMS ARE MOST POPULAR.

* Add .65" to overall length.



Technical Information

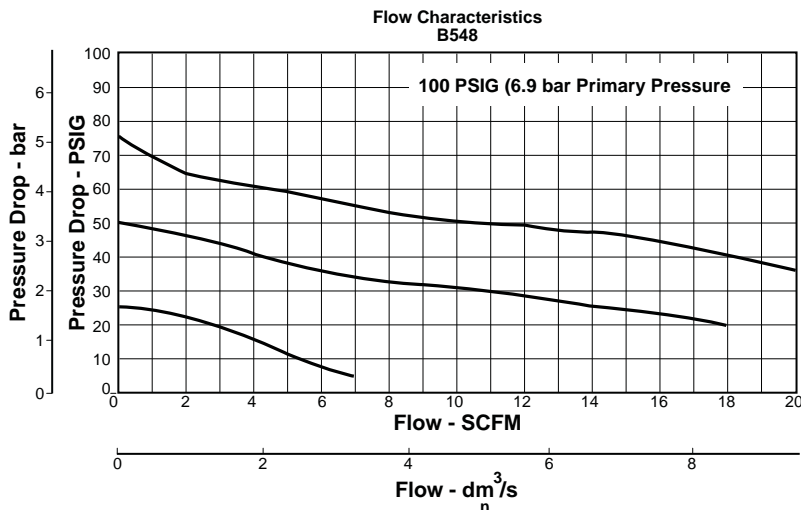

⚠ WARNING

Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.

⚠ CAUTION:
 REGULATOR PRESSURE ADJUSTMENT – T

T

F

B548 Filter / Regulator Kits & Accessories

- Bowl Kits –
 - Zinc (D) BK505Y
 - Zinc with Automatic Pulse Drain (D)..... BK505SY
 - Polycarbonate (A) BK504Y
 - Polycarbonate with Automatic Pulse Drain (A)..... BK504SY
 - Cage Kits (All)CKR364Y
 - Drain Kits –
 - Automatic Pulse Drain
 - (Maximum Pressure = 175 PSIG) RK504SY
 - Semi-Automatic “Overnight” Drain SA602A7
 - (Drains automatically under zero pressure)
 - Filter Element Kits –
 - 20 Micron (All).....EK504Y
 - 5 Micron (All)..... EK504VY
 - Gauges –
 - 1-1/2" Dial Size, 1/8" Back Connection
 - 0 to 60 PSIG (0 to 400 kPa)..... K4515N18060
 - 1-1/2" Dial Size, 1/8" Back Connection
 - 0 to 160 PSIG (0 to 1100 kPa)..... K4515N18160
 - Mounting Bracket Kit (Includes Plastic Panel Nut)SA161X57
 - Panel Mount Nut –
 - Plastic.....R05X51-P
 - Aluminum R05X51-A
 - Repair Kits –
 - Non-Relieving Diaphragm, Valve Assembly (All) RK548Y
 - Relieving Diaphragm, Valve Assembly (All) RK549Y
- F F N


Specifications

- Bowl Capacity 1 Ounce
- Gauge Ports (2) 1/8 Inch
- Maximum Pressure –
 - Zinc Bowl (D) 0 to 300 PSIG
 - Polycarbonate Bowl (A) 0 to 150 PSIG
- Reduced Pressure Range –
 - 0 to 25 PSIG (0 to 1.7 bar) (A)
 - 0 to 60 PSIG(0 to 4.1 bar) (B)
 - 2 to 125 PSIG(0.15 to 8.5 bar) (C)
- Temperature Rating 40°F to 125°F (4.4°C to 52°C)
- Port Threads 1/4 Inch
- Weight –
 - Zinc Bowl (D) 0.6 lb. (0.27 kg) / Unit
 - 12 lb. (5.44 kg) / 24-Unit Master Pack
 - Polycarbonate Bowl (A) 0.3 lb. (0.14 kg) / Unit
 - 6 lb. (2.72 kg) / 24-Unit Master Pack

Materials of Construction


- Adjusting Knob Acetal
- Body Aluminum
- Bowls –
 - Polycarbonate (A) Polycarbonate
 - Metal (D)Zinc
 - Zinc with Automatic Pulse Drain
- Elastomers Buna N
- Filter Element Sintered Polypropylene
- Filter Retainer, Vane Plate Acetal
- Internvalve, Diaphragm, Button, Drain Brass

B11 Filter / Regulators – Compact



Features

- Space saving package offers both filter and regulator features for optimal performance
- Excellent water removal efficiency
- Rolling diaphragm for extended life
- Quick response, and accurate pressure regulation regardless of changing flow or inlet pressure
- Two high flow 1/4" gauge ports can be used as additional outlets
- Shown with recommended metal bowl guard
- High flow: 1/4" – 46 SCFM[§]
3/8" – 55 SCFM[§]
1/2" – 61 SCFM[§]

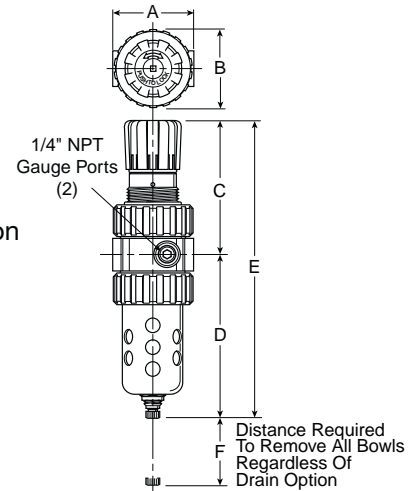

Port Size	NPT	
	Twist Drain	Auto Float Drain
Poly Bowl [‡] / Metal Guard		
1/4"	B11-022A11A*	B11-026A11A*
3/8"	B11-032A11A*	B11-036A11A*
1/2"	B11-042A11A*	B11-046A11A*
Metal Bowl / Sight Gauge		
1/4"	B11-024A11A*	B11-028A11A*
3/8"	B11-034A11A*	B11-038A11A*
1/2"	B11-044A11A*	B11-048A11A*

B11 Filter / Regulator Dimensions			
A	B	C	D
D [†]	E	E [†]	F


I
T D A D

Standard part numbers shown bold.
For other models refer to ordering information below.
NOTE: 1.218 Dia. (31mm) hole required for panel mounting.
[‡] For polycarbonate bowl see Caution on page inside cover.
[§] SCFM = Standard cubic feet per minute at 100 PSIG inlet, 75 PSIG no flow secondary setting and 25% pressure drop.

⚠ WARNING


Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

Ordering Information

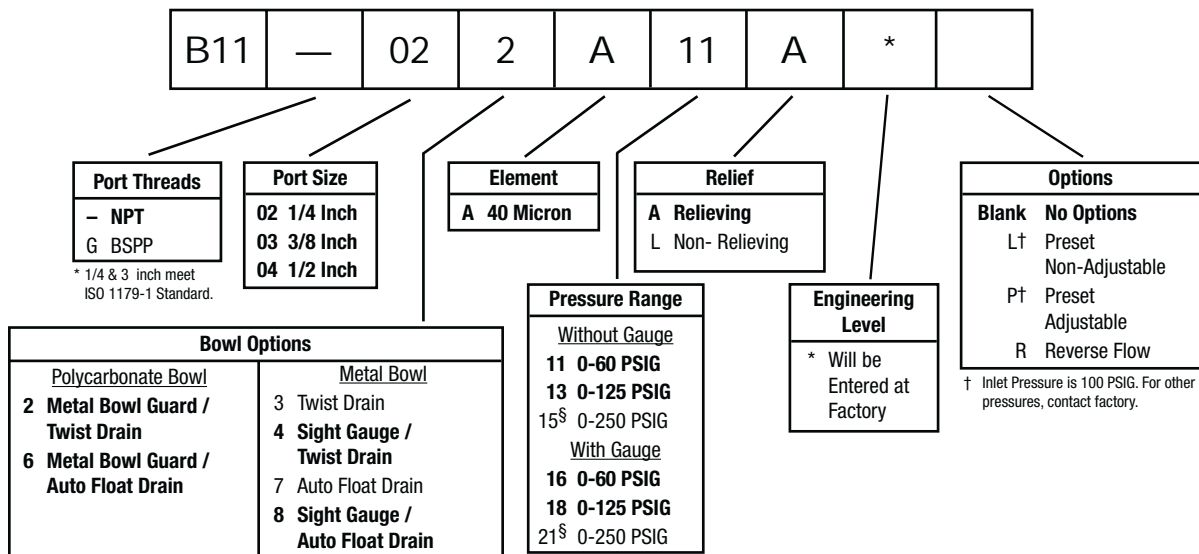


BOLD ITEMS ARE MOST POPULAR.

B11 Filter / Regulators – Standard



Features

- Space saving package offers both filter and regulator features for optimal performance
- Excellent water removal efficiency
- Rolling diaphragm for extended life
- Quick response, and accurate pressure regulation regardless of changing flow or inlet pressure
- Two high flow 1/4" gauge ports can be used as additional outlets
- Shown with recommended metal bowl guard
- High flow: 3/4" – 90 SCFM[§]

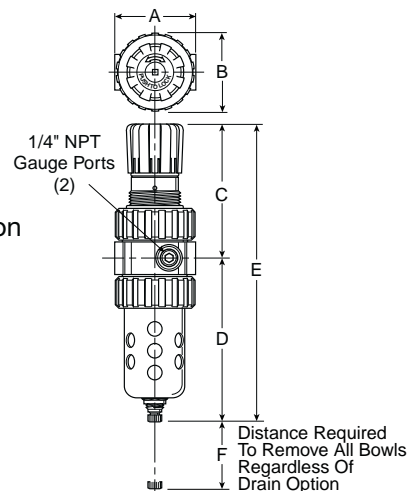

Port Size	NPT	
	Twist Drain	Auto Float Drain
Poly Bowl ‡ / Metal Guard		
3/4"	B11-062A11A*	B11-066A11A*
Metal Bowl / Sight Gauge		
3/4"	B11-064A11A*	B11-068A11A*

Standard part numbers shown bold.

For other models refer to ordering information below.

‡ For polycarbonate bowl see Caution on inside cover.

§ SCFM = Standard cubic feet per minute at 100 psig inlet, 90 psig no flow secondary setting and 10 psig pressure drop.

NOTE: 2.00 Dia. (50.8 mm) hole required for panel mounting.

Max. panel thickness 1/4".


B11 Filter / Regulator Dimensions			
A	B	C	D
D†	E	E†	F

T D A D

⚠ WARNING


Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

Ordering Information

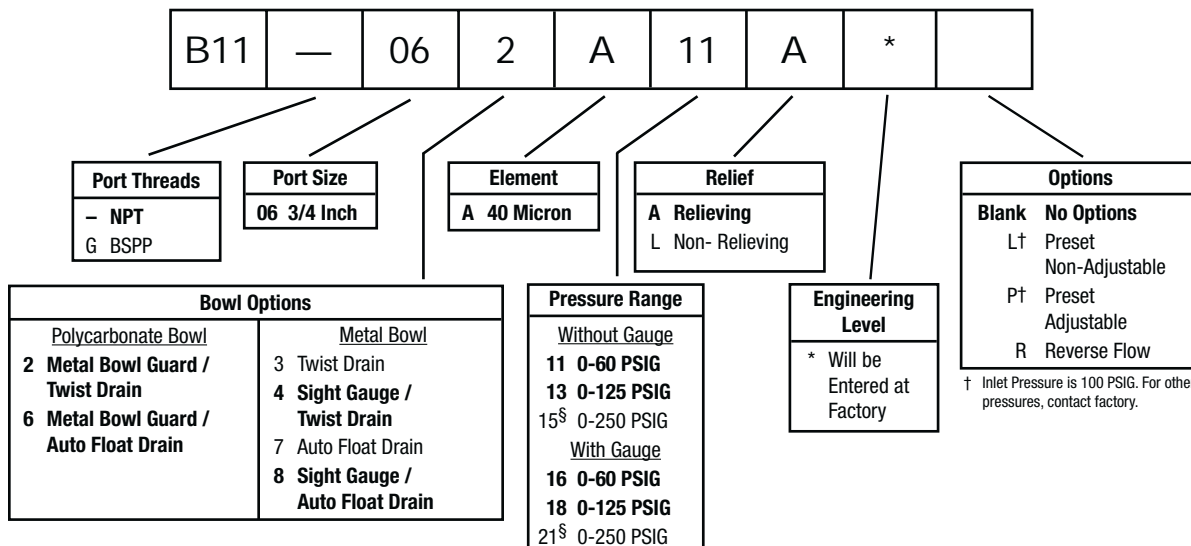

BOLD ITEMS ARE MOST POPULAR.

Technical Information

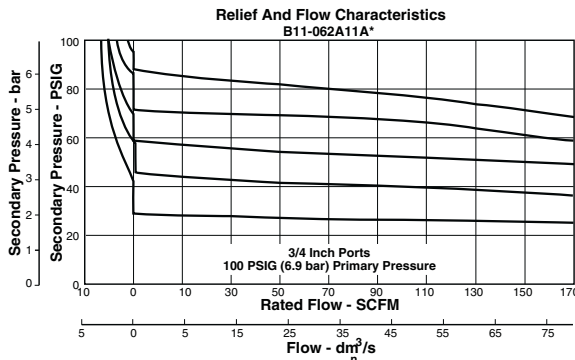

CAUTION:
REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design. For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

B11 Filter / Regulator Kits & Accessories

- Bonnet Assembly KitPS715
- Bowl Guard Kit.....PS805
- Bowl Kits –**
 - Poly Bowl – Automatic Float Drain.....PS822
 - Twist Drain.....PS832
 - Metal Bowl – Automatic Float Drain.....PS826
 - Twist Drain.....PS834
 - Sight Gauge / Automatic Drain.....PS823
 - Sight Gauge / Twist Drain.....PS835
- Control Knob.....P04069B
- Drain Kits –** Automatic Float Drain.....PS506
- Twist Drain.....PS512
- Filter Element Kits – 40 MicronPS801
- Gauges – 2" Dial Face**
 - 60 psig (0 to 4.1 bar).....K4520N14060
 - 160 psig (0 to 11.0 bar).....K4520N14160
 - 300 psig (0 to 20.0 bar).....K4520N14300
- 1-3/4" Digital Round Face**
 - 160 psig (0 to 11.0 bar).....K4517N14160
- Mounting Bracket Kit (Includes Panel Mount Nut).....PS807
- Panel Mount NutP04082
- Service Kits –** Non-Relieving (Includes Poppet).....PS811
- Relieving (Includes Poppet)PS810
- Seat Insert KitPS813
- Springs –** 1- 30 psig RangeP01698
- 1- 60 psig RangeP04062
- 2- 125 psig RangeP04063
- 5- 250 psig RangeP04064
- Tamperproof Kit (Key Lock)PS737

Specifications

- Bowl Capacity7.2 Ounces
- Gauge Ports (2)1/4 Inch
(Can be used as Additional Full Flow 1/4" Outlet Ports)
- Port Threads1/2, 3/4 Inch

Pressure & Temperature Ratings –

- Polycarbonate Bowl – 0 to 150 psig (0 to 10.4 bar)
32°F to 125°F (0°C to 52°C)
- Metal Bowl – 0 to 250 psig (0 to 17.2 bar)
32°F to 175°F (0°C to 80°C)
- Automatic Float Drain – 15 to 250 psig (1.0 to 17.2 bar)

Secondary Pressure Ranges –

- Standard Pressure2 to 125 psig (0 to 8.6 bar)
- Low Pressure1 to 60 psig (0 to 4.1 bar)
- High Pressure5 to 250 psig (0.4 to 17.2 bar)

- Sump Capacity2.8 Ounces
- Weight2.5 lb. (1.1 kg)

Materials of Construction

- Adjusting StemSteel
- BodyZinc
- Bonnet, Internal PartsPlastic
- Bowls Available – TransparentPolycarbonate
- Metal (With or Without Sight Gauge)Zinc
- Bowl GuardSteel
- CollarPlastic or Metal
- DiaphragmNitrile
- Drains –** Manual Twist Drain Standard
Body & NutPlastic
- Automatic Float Drain Optional
(Interchangeable for Field Conversions)
Operating Range10 to 250 psig (.7 to 17.2 bar)
- Housing, FloatPlastic
- SealsNitrile
- Springs, Push RodStainless Steel
- KnobPlastic
- Filter Elements – 40 Micron (Standard)Plastic
- SealsNitrile
- Sight GaugePolyamide (Nylon)
- Springs –** PoppetStainless Steel
- ControlSteel



Lubricators

Lubrication

Many pneumatic system components and most pneumatic tools require oil lubrication for proper operation and long service life. This lubricant is typically carried by the air stream. Too little oil can cause excessive wear and premature failure. Too much oil is wasteful and can become a contaminant, particularly when carried over with the air exhaust. Intermittent lubrication may be the worst situation because the oil film can dry out to form sludges and varnishes on internal surfaces.

Air line lubricators meter oil from a reservoir into the moving air stream. In general terminology, the oil droplets are usually termed a fog. For best results, the lubricator should be located as close as possible to the point where lubrication is required.

How to Select the Proper Lubricator

Use of proper lubricator can greatly extend the life of expensive downstream pneumatic equipment. Lubricators often are selected according to pipe size. Other selection factors are type of bowl material, bowl size, and refilling system capability. Bowls are available in both polycarbonate and metal. Polycarbonate offers the advantage or transparency, for simplified inspection of oil level and condition. However, caution must be exercised when using polycarbonate bowls in any area where certain chemicals are used. (Please read the warning carefully.)

In addition to choice of bowls, minimum and maximum flow rates and pressure requirements should also be considered. Be sure to check the pressure drop curves, to make certain the selected model will not create a higher pressure drop than the system design can tolerate.

Lubricator Construction

Bowls are available in polycarbonate and metal, subject to the same constraints discussed in the Filter Section. Transparent polycarbonate simplifies inspection of the oil level and checking for dirt and liquid condensate in the oil. Note that the system must be exhausted before removing the bowl.

In some models, the system must also be exhausted before opening the fill plug to recharge the lubricator. Other designs automatically bypass the air during refilling.

⚠ Warning

The plastic material used to manufacture the plastic bowls, and the sight gauge on metal bowls, may be attacked by certain chemicals. Do not use this lubricator on systems with air supplied by a compressor lubricated with synthetic oils or oils containing phosphate esters or chlorinated hydrocarbons. These oils can carry over into the air lines and chemically attack and possibly rupture the bowl or sight gauge. Also, do not expose the bowl or sight gauge to materials such as carbon tetrachloride, trichlorethylene, acetone, paint thinner, cleaning fluids, or other harmful materials, for they too will cause the plastic to craze and/or rupture. For use in environments where these, or any, chemicals may be present, consult the factory for approval.

Lubricator Installation


The lubricators listed in this catalog should be placed before any valving and stay pressurized before, during, and after machine tool cycles. These lubricators should be placed no farther away than 15 feet from the desired point of lubrication.

Lubricators

Lubrication Operation

Most lubricator designs include a high-velocity venturi section in the air flow path which creates a low-pressure area to draw oil from the reservoir through a capillary tube to the point of injection. There, the air stream breaks up the oil into droplets.

In a typical lubricator, filtered and regulated air enters the lubricator housing and is channeled in either of two directions depending on flow rate. At low flow rates, all the air passes through the venturi where it mixes with metered oil droplets. Under higher flow conditions, the spring-loaded bypass valve opens and the excess flow bypasses the venturi, then blends with the lubricated air at a downstream point. A manual adjustment (needle valve) in the housing sets the oil drip-rate into the air stream; a sight gauge allows that rate to be monitored. Fill plugs at the lubricator top provide access to refill the reservoir with oil. The bowl is removable for cleaning.

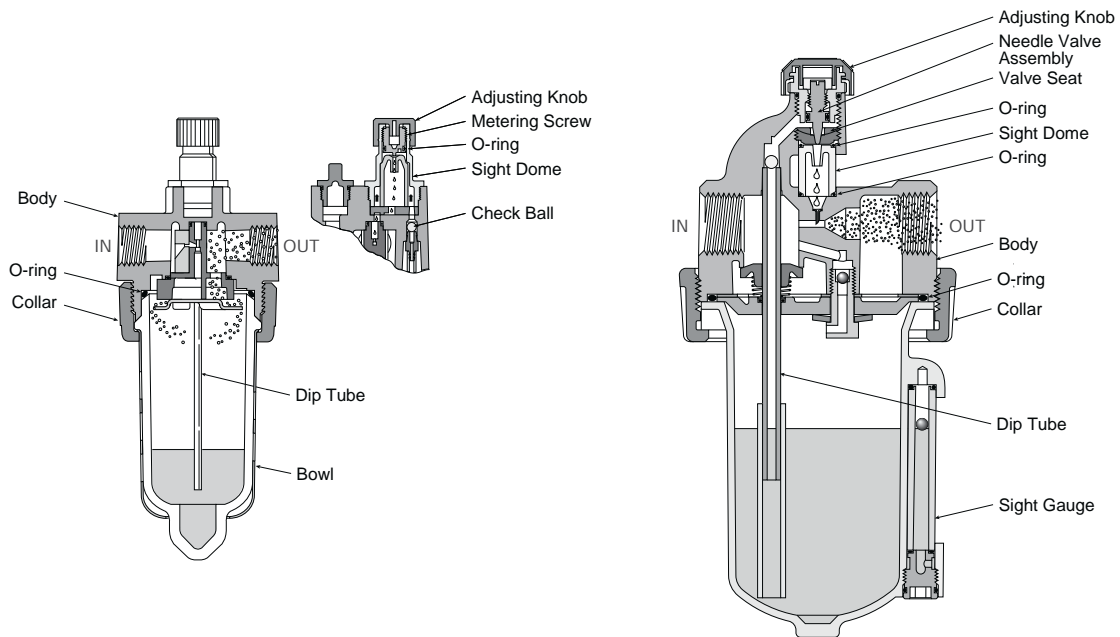

04L Mist Lubricators – Miniature




Features



I
T

CF
CF

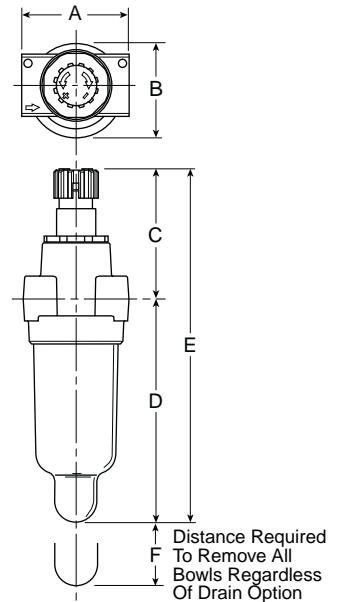

Port Size	NPT	
	Twist Drain	No Drain
B		04L00G*
		04L10G*
B	04L03G*	
	04L13G*	


04L Lubricator Dimensions		
A	B	C
D	D [†]	E
E [†]	F	

Standard part numbers shown bold.
For other models refer to ordering information below.

‡ For polycarbonate bowl see Caution on inside cover.
§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

I
T D

Ordering Information



Port Size
0 1/8 Inch
1 1/4 Inch

Bowl Options	
<u>Polycarbonate Bowl</u>	<u>Metal Bowl</u>
0 Without Drain	3 Twist Drain
T D	



Body
G Without Tamperproof Cap. No Fill Plug

Engineering Change Designator
Will be Entered at Factory

Port Type	
Blank	NPT
1	BSPP
2	BSPT

BOLD ITEMS ARE MOST POPULAR.

Technical Information

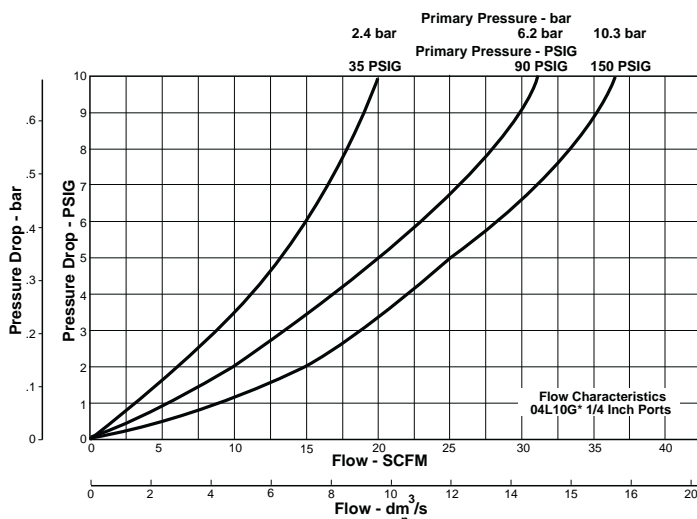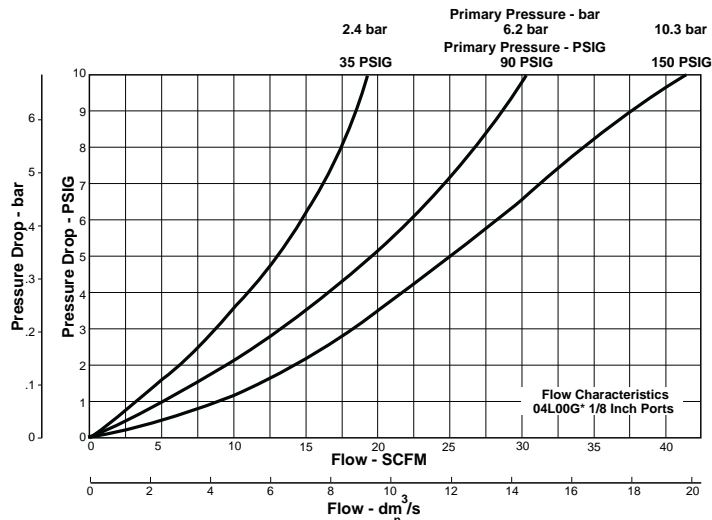

04L Mist Lubricator Kits & Accessories

Bowl Kits –

Poly Bowl –

- No DrainPS421
- Twist Drain.....PS420

Metal Bowl –

- Twist Drain (No Sight Gauge)PS447B

- Mounting Bracket Kit PS419

- Oil – 1 Gal..... F442002
- 12 Quart Case..... F442003
- 4 Gallon Case..... F442005

Specifications

- Bowl Capacity O
- Minimum Flow for Lubrication CF I
- Port Threads I
- Pressure & Temperature Ratings – B

B I
 F F C C
 Suggested Lubricant – F O
 U F
 F
 DO NOT USE OILS THAT CONTAIN ADDITIVES
 COULDED OILS CONTAINING OILS
 AITED DETENT OILS


Weight

Materials of Construction

- Body
- Bowls – T
- Drains – T B N
- Seals N
- Sight Dome




L508 Mist Lubricators – Miniature



Features



CF
 CF

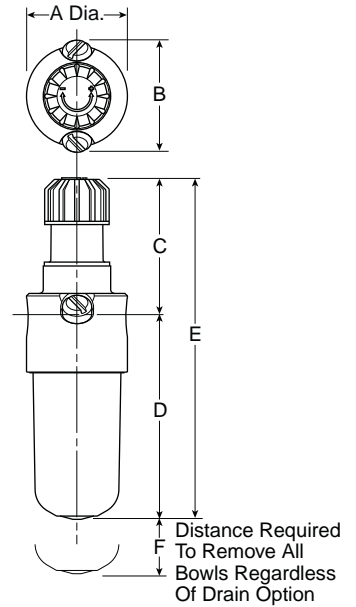


Port Size	NPT	
	No Drain	Twist Drain
B		
	L508-01A	L508-01AX9
	L508-02A	L508-02AX9
B		
	L508-01D	L508-01DX9
	L508-02D	L508-02DX9

L508 Lubricator Dimensions		
A	B	C
D	D†	E
E†	F	

Standard part numbers shown bold.
 For other models refer to ordering information below.
 ‡ For polycarbonate bowl see Caution on inside cover.
 § SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

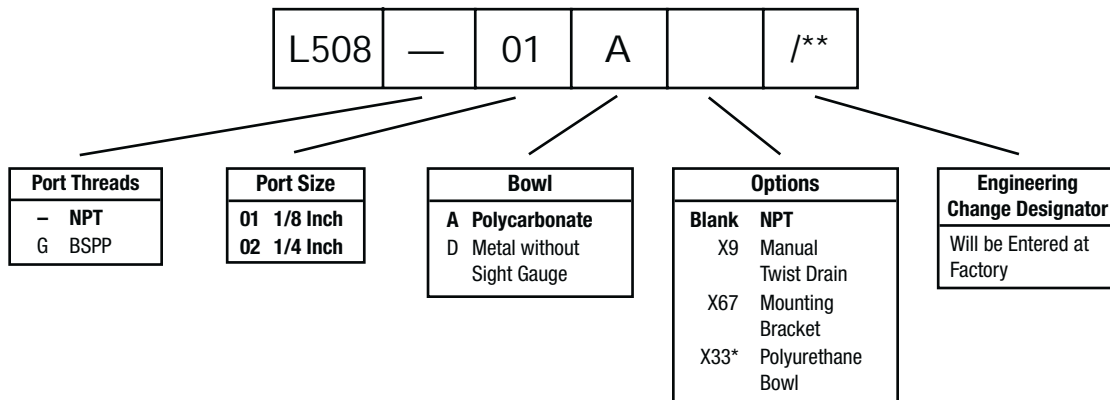


* Add .65" to overall length.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

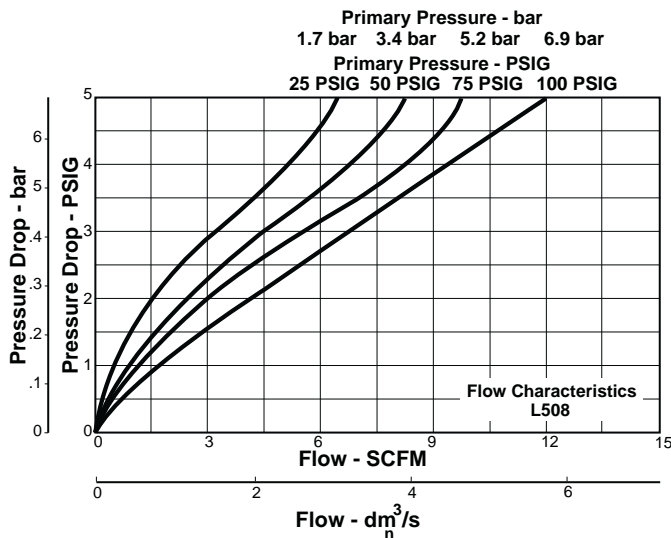

L508 Mist Lubricator Kits & Accessories

- Bowl Kits –
 - Polycarbonate Bowl –
 - No Drain BK508Y
 - Manual Twist Drain BK504Y
 - Metal Bowl –
 - No Drain BK509Y
 - Manual Twist Drain (No Sight Gauge)..... BK505Y
- Mounting Bracket Kit Must Be Ordered with Lubricator
- Oil –
 - 1 Gal. F442002
 - 12 Quart Case F442003
 - 4 Gallon Case F442005

Specifications

- Bowl Capacity 1 Ounce
- Minimum Flow for Lubrication 0.5 SCFM at 100 PSIG
- Port Threads 1/8, 1/4 Inch
- Pressure & Temperature Ratings –
 - Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
 32°F to 125°F (0°C to 52°C)
 - Metal Bowl – 0 to 300 PSIG (0 to 20.4 bar)
 40°F to 150°F (4°C to 65.6°C)

Suggested Lubricant – F442 Oil

Petroleum based oil of 100 to 200 SUS viscosity at 100°F and an aniline point greater than 200°F

(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Weight 0.4 lb. (0.18 kg)

Materials of Construction


- Body Aluminum
- Bowls –
 - Polycarbonate Polycarbonate
 - Metal (Without Sight Gauge) Zinc
- Drains –
 - Manual Twist..... Brass
- Seals Nitrile
- Sight Dome

L606 Micro-Mist Lubricators – Compact



Features

- Proportional oil delivery over a wide range of air flows
- Generates oil particles of 5 micron or smaller downstream to lubricate systems having complex piping arrangements
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- Ideal for low and high flow applications with changing air flow
- Transparent sight dome for 360° visibility.
- Yellow fill cap identifies Micro-Mist Lubricator
- High Flow: 1/4" – 40 SCFM §
3/8" – 60 SCFM §
1/2" – 90 SCFM §

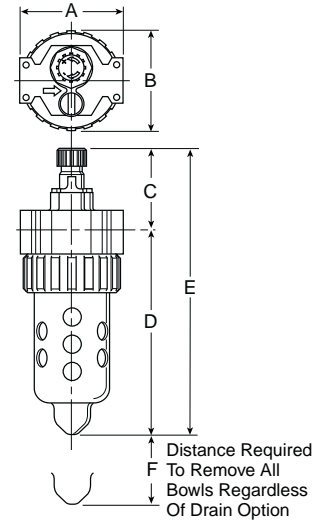


Port Size	NPT	
	Twist Drain	No Drain
Poly Bowl [‡] / Metal Guard		
1/4"		L606-022B*
3/8"		L606-032B*
1/2"		L606-042B*
Metal Bowl / Sight Gauge		
1/4"	L606-024B*	
3/8"	L606-034B*	
1/2"	L606-044B*	

L606 Lubricator Dimensions			
A	B	C	D
D [†]	E	E [†]	F

Inches (mm)
† With Twist Drain.

Standard part numbers shown bold.
For other models refer to ordering information below.
‡ For polycarbonate bowl and sight dome, see Caution on inside cover.
§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information



Port Threads
— NPT
G* BSPP

* 1/4 & 3/8 inch meet ISO 1179-1 Standard.

Port Size
02 1/4 Inch
03 3/8 Inch
04 1/2 Inch

Bowl Options	
Polycarbonate Bowl	Metal Bowl
2 Metal Bowl Guard / No Drain	4 Sight Gauge / Twist Drain
6 Metal Bowl Guard / Pressure Fill	8 Sight Gauge / Pressure Fill




Options
B With Fill Plug
C With Fill Plug/Nylon Sight Dome
F With Body Pressure Fill
G With Body Pressure Fill / Nylon Sight Dome

Engineering Level
* Will be Entered at Factory.

BOLD ITEMS ARE MOST POPULAR.



Technical Information

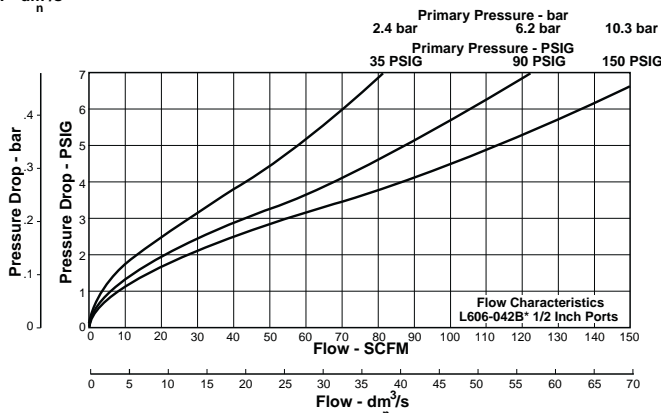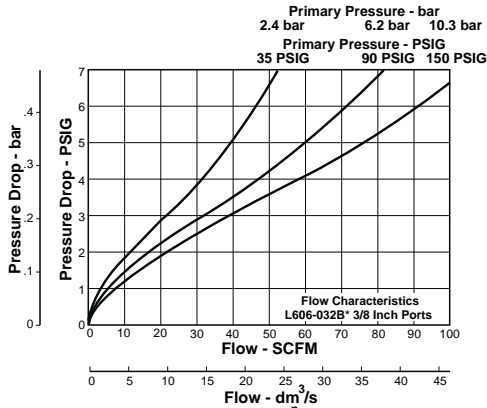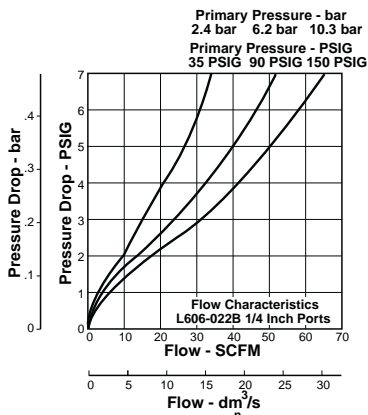

**L606 Micro-Mist Lubricator
 Kits & Accessories**

Adjustment Knob		
Adjustment Knob (Old L606)		606Y72
Bowl Guard Kit		
Bowl Kits –		
B N D		
T D		
F		
Plastic Bowl Guard (Old L606)		BK606Y
B T D		
F		
Zinc with Sight Gauge (Old L606)		BK605WY
Drain Kit – Twist Drain		
Fill Cap Kit		
Lubricator Service Kit		
Mounting Bracket Kit		
Mounting Bracket Kit (Old L606)		SAF602-0571
Oil –		F
C		F
C		F
Pressure Fill Adapter Kit		
Pressure Fill Button		
Button Head Fill Fitting (M14 Male Thread) (Old L606)		L606C14
Drip Tube Kit (Old L606)		DTK606
Drip Spout Kit (Old L606)		RK606SY
Sight Dome / Fill Cap Kit		
Nylon Sight Dome Kit		N
Repair Kits –		
Needle Valve Assembly (B, W) (Old L606)		RK606Y
Sight Gauge for “W” Bowl (Old L606)		RKB605WY

Specifications

Bowl Capacity					O
Minimum Flow for Lubrication				CF	
Port Threads					I
Pressure & Temperature Rating –					
B			F	F	C C
B			F	F	C C
Suggested Lubricant					F O
			U		F C
			F	C	
DO NOT USE OILS THAT CONTAIN SULFUR					
DO NOT USE OILS THAT CONTAIN LEAD					
DO NOT USE OILS THAT CONTAIN ZINC					
DO NOT USE OILS THAT CONTAIN COPPER					
DO NOT USE OILS THAT CONTAIN SILICON					
DO NOT USE OILS THAT CONTAIN PHOSPHORUS					
DO NOT USE OILS THAT CONTAIN NICKEL					
DO NOT USE OILS THAT CONTAIN CHLORINE					
DO NOT USE OILS THAT CONTAIN BROMINE					
DO NOT USE OILS THAT CONTAIN IODINE					
DO NOT USE OILS THAT CONTAIN ANTIMONY					
DO NOT USE OILS THAT CONTAIN ARSENIC					
DO NOT USE OILS THAT CONTAIN BARIUM					
DO NOT USE OILS THAT CONTAIN BISMUTH					
DO NOT USE OILS THAT CONTAIN CADMIUM					
DO NOT USE OILS THAT CONTAIN CHROMIUM					
DO NOT USE OILS THAT CONTAIN COBALT					
DO NOT USE OILS THAT CONTAIN GALLIUM					
DO NOT USE OILS THAT CONTAIN GERMANIUM					
DO NOT USE OILS THAT CONTAIN IRIDIUM					
DO NOT USE OILS THAT CONTAIN LITHIUM					
DO NOT USE OILS THAT CONTAIN MANGANESE					
DO NOT USE OILS THAT CONTAIN MOLYBDENUM					
DO NOT USE OILS THAT CONTAIN NIOBIUM					
DO NOT USE OILS THAT CONTAIN NICKEL					
DO NOT USE OILS THAT CONTAIN NIOBIUM					
DO NOT USE OILS THAT CONTAIN OSMIUM					
DO NOT USE OILS THAT CONTAIN PALLADIUM					
DO NOT USE OILS THAT CONTAIN PLATINUM					
DO NOT USE OILS THAT CONTAIN RUTHENIUM					
DO NOT USE OILS THAT CONTAIN SILICON					
DO NOT USE OILS THAT CONTAIN STRONTIUM					
DO NOT USE OILS THAT CONTAIN TANTALUM					
DO NOT USE OILS THAT CONTAIN TUNGSTEN					
DO NOT USE OILS THAT CONTAIN VANADIUM					
DO NOT USE OILS THAT CONTAIN ZINC					
DO NOT USE OILS THAT CONTAIN ZIRCONIUM					

Weight

Materials of Construction

Body					
Bowls – T					
Bowl Guard					
Collar					
Drain – Twist – Body & Nut					
Injector Meter Block & Base Assembly					
Seals					N
Sight Dome					N
Sight Gauge					N




L606 Micro-Mist Lubricators – Standard



Features

- Proportional oil delivery over a wide range of air flows
- Generates oil particles of 5 micron or smaller downstream to lubricate systems having complex piping arrangements
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- Ideal for low and high flow applications with changing air flow
- Transparent sight dome for 360° visibility
- Yellow fill cap identifies micro-mist lubricator
- High flow: 3/4" – 90 SCFM[§]

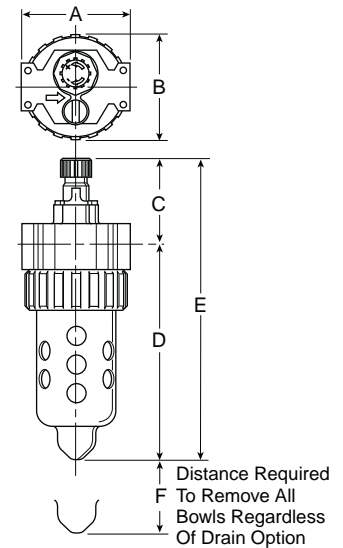

Port Size	NPT	
	Twist Drain	No Drain
Poly Bowl [‡] / Metal Guard		
3/4"		L606-062B*
Metal Bowl / Sight Gauge		
3/4"	L606-064B*	

L606 Lubricator Dimensions			
A	B	C	D
D [†]	E	E [†]	F

Standard part numbers shown bold.

For other models refer to ordering information below.


[‡] For polycarbonate bowl and sight dome, see Caution on inside cover.

[§] SCFM = Standard cubic feet per minute at 90 psig inlet and 5 psig pressure drop.

Inches (mm)

[†] With Twist Drain.


Ordering Information

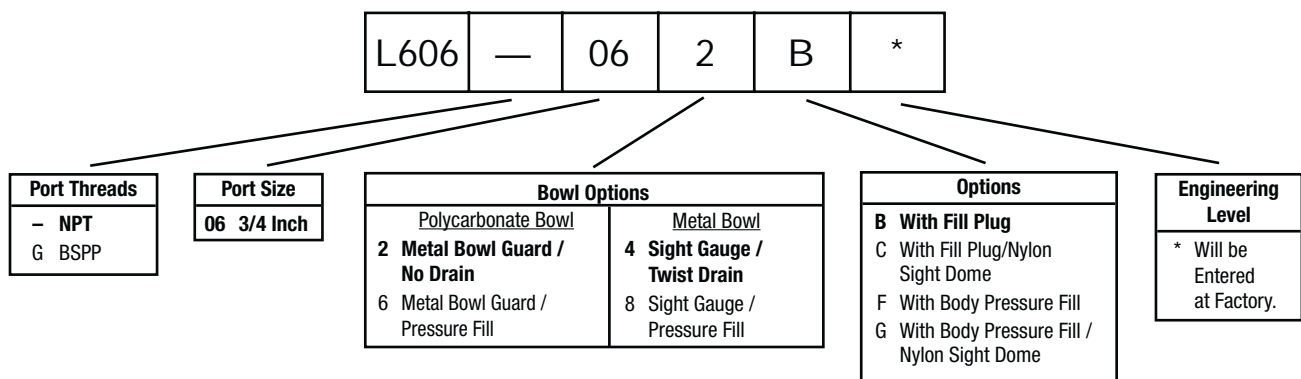

BOLD ITEMS ARE MOST POPULAR.



Technical Information

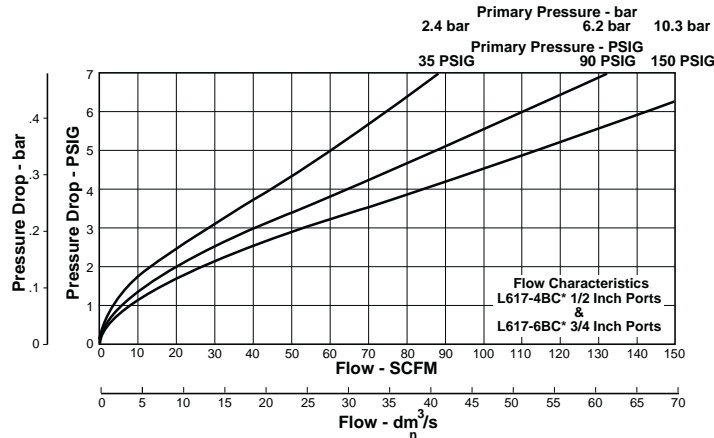

**L606 Micro-Mist Lubricator
 Kits & Accessories**

Adjustment Knob	
Adjustment Knob (Old L606)	606Y72
Bowl Guard Kit	
Bowl Kits –	
B N D	
T D	
F	
F	
Plastic Bowl Guard (Old L606).....	BK606A
B T D	
F	
Zinc with Sight Gauge (Old L606)	BK605WA
Aluminum (E) (Old L606)	BK603A
Aluminum with Sight Gauge (G) (Old L606)	BK606X30A
Drain Kit T D	
Fill Cap Kit	
Lubricator Service Kit	
Mounting Bracket Kit	
Mounting Bracket Kit (Old L606)	SAF602-0572
Oil –	F
C	F
C	F
Pressure Fill Adapter Kit	
Pressure Fill Button	
Button Head Fill Fitting (M14 Male Thread) (Old L606)	L606C14
Drip Tube Kit (Old L606)	DTK606
Drip Spout Kit (Old L606)	RK606SY
Remote Auto-Fill Device	C
Sight Dome / Fill Cap Kit	
Sight Dome Kit	
Nylon Sight Dome Kit	N
Repair Kits –	
Adjusting Knob (Old L606)	606Y72
Needle Valve Assembly (B, W) (Old L606)	RK606Y
Sight Gauge for “W” Bowl (Old L606)	RKB605WY
Sight Gauge for “G” Bowl (Old L606)	RKB606X30A


Specifications

Bowl Capacity		O
Minimum Flow for Lubrication	CF	I
Port Threads		I
Pressure & Temperature Rating –		
B	F	F C C
B	F	F C C
Suggested Lubricant		F O
	U	F C
	F C	
DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES		DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES
DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES		DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES
DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES		DO NOT USE OILS THAT CONTAIN ANTI-WEAR ADDITIVES
Weight		

Materials of Construction


Body	
Bowls – T	
Bowl Guard	
Collar	
Drain – T B N	
Injector Meter Block & Base Assembly	
Seals	N
Sight Dome	
Sight Gauge	N

L606 Mist Lubricators – Standard



Features

- Metal bowl with sight gauge - standard
- Polycarbonate sight dome
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- Large capacity bowl
- Optional high capacity bowl(s) available
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- Automatic fill optional (requires external pressurized oil supply)
- High flow: 3/4" – 325 SCFM§
1" – 350 SCFM§

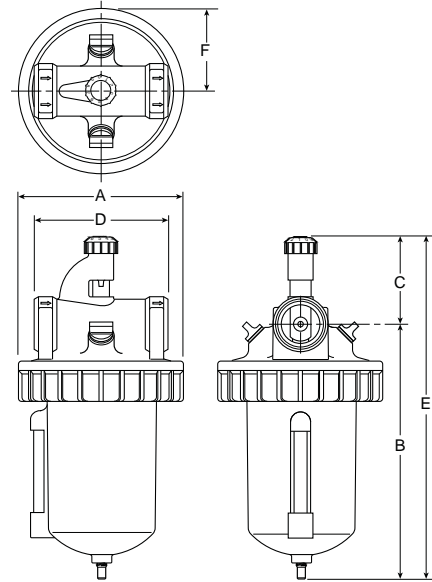

Port Size	NPT
	No Drain
Metal Bowl / Sight Gauge	
3/4"	L606-06W
1"	L606-08W
Metal Bowl 32 oz. without Sight Gauge	
3/4"	L606-06E
1"	L606-08E
Metal Bowl 64 oz. with Sight Gauge	
3/4"	L606-06G
1"	L606-08G

L606 Lubricator Dimensions					
A	B	C	D	E	F
L606-06W, L606-08W					
4.97 (126)	7.25 (184)	2.63 (67)	4.06 (103)	9.88 (251)	2.48 (63)
L606-06E, L606-08E					
4.97 (126)	10.75 (273)	2.63 (67)	4.06 (103)	13.38 (340)	2.48 (63)
L606-06G, L606-08G					
5.00 (127)	9.40 (239)	2.62 (66)	4.06 (103)	12.02 (305)	2.50 (64)


inches (mm)

Standard part numbers shown bold.

For other models refer to ordering information below.


§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

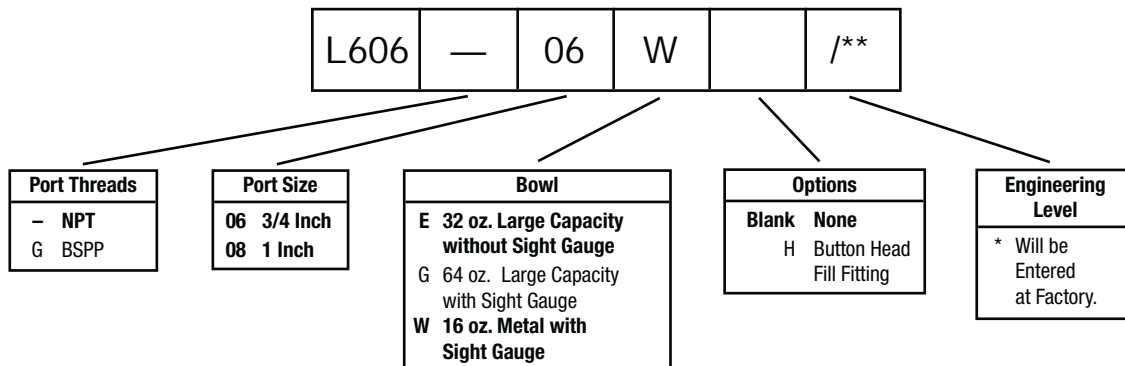


BOLD ITEMS ARE MOST POPULAR.

L606 Mist Lubricators – Standard



Features

- Metal bowl with sight gauge - standard
- Polycarbonate sight dome
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- Large capacity bowl
- Optional high capacity bowl(s) available
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- Automatic fill optional (requires external pressurized oil supply)
- High flow: 1-1/4" – 325 SCFM§
1-1/2" – 400 SCFM§

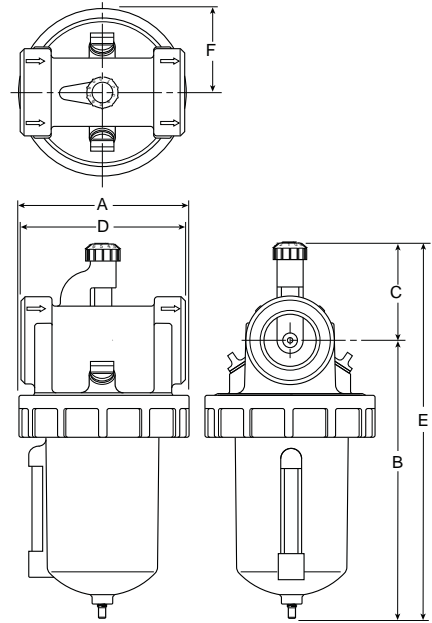

Port Size	NPT
	No Drain
Metal Bowl / Sight Gauge	
1-1/4"	L606-10W
1-1/2"	L606-12W
Metal Bowl 32 oz. without Sight Gauge	
1-1/4"	L606-10E
1-1/2"	L606-12E
Metal Bowl 64 oz. with Sight Gauge	
1-1/4"	L606-10G
1-1/2"	L606-12G


L606-10W12W & L606-10E12E

L606 Lubricator Dimensions					
A	B	C	D	E	F
L606-10W, L606-12W					
4.97 (126)	7.63 (194)	2.84 (72)	4.81 (122)	10.47 (266)	2.48 (63)
L606-10E, L606-12E					
4.97 (126)	11.13 (283)	2.84 (72)	4.81 (122)	13.97 (355)	2.48 (63)
L606-10G, L606-12G					
5.00 (127)	7.99 (203)	2.84 (72)	4.81 (122)	12.80 (325)	2.50 (64)

§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.




inches (mm)

Ordering Information

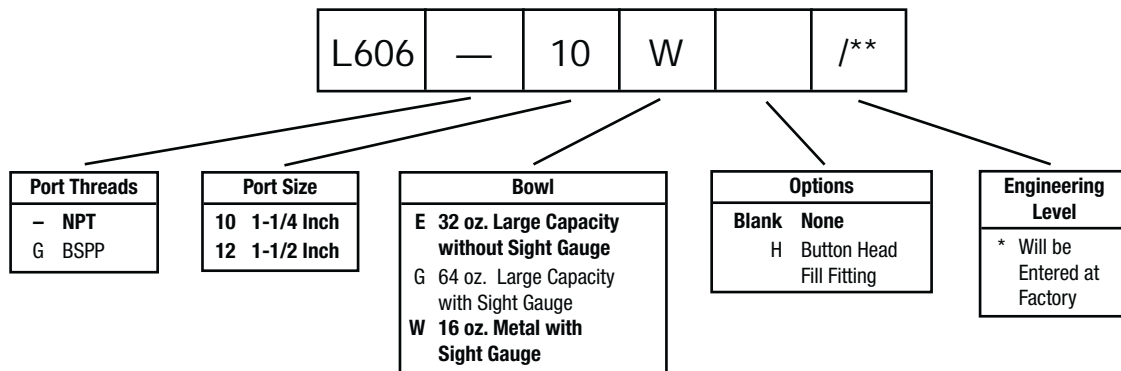

BOLD ITEMS ARE MOST POPULAR.

Technical Information

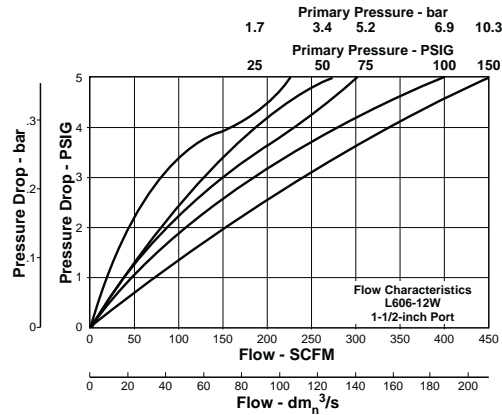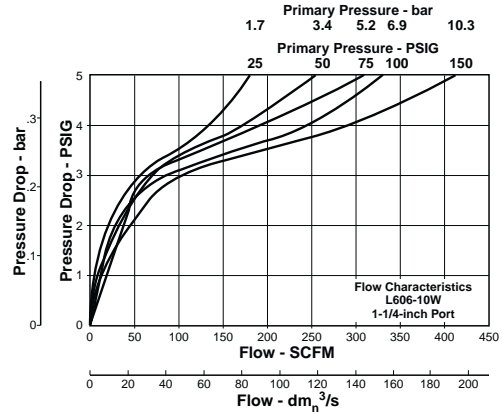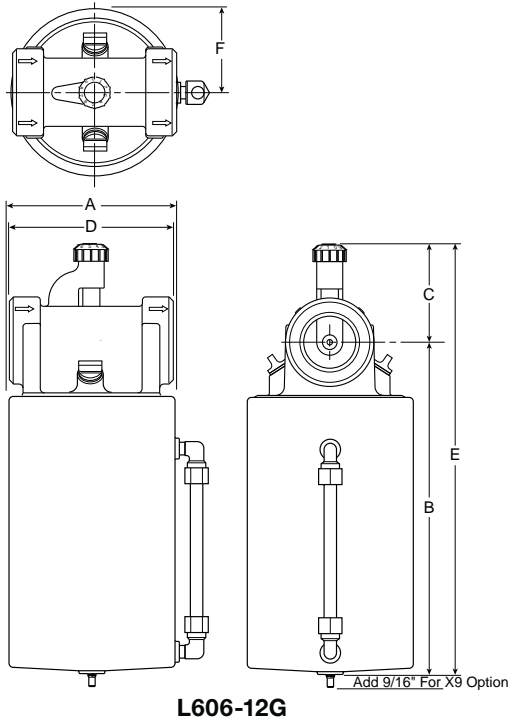

L606 Lubricator Kits & Accessories

Adjusting Knob

Bowl Kits –

A E
 A

B B
 B B
 B B

Button Head Fill Fitting

Dip Tube Kit

DT

Drip Spout Kit

Oil –

C
 C

F
 F
 F

Repair Kits – N

A A

B B
 B B
 A B

FI

Specifications

Bowl Capacity –

A E
 A N

O
 O
 O

Port Threads

I

Pressure & Temperature Ratings –

A B E

F F C C

A B

F F C C

N B

F F C C

Suggested Lubricant

DO NOT USE OILS THAT CONTAIN SULFUR, LEAD, COPPER, OR OTHER ADDITIVES WHICH WOULD DETRIMENTALLY AFFECT THE PERFORMANCE OF THE LUBRICATOR.

Weight –

A B E

A B

N B

Materials of Construction

Body

Bowls – E

A

Seals

A

N

B N




09L Mist Lubricators – Hi-Flow



Features

- Metal bowl with sight gauge and manual drain – standard
- Transparent sight dome for 360° visibility
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- High flow: 1000 – SCFMS

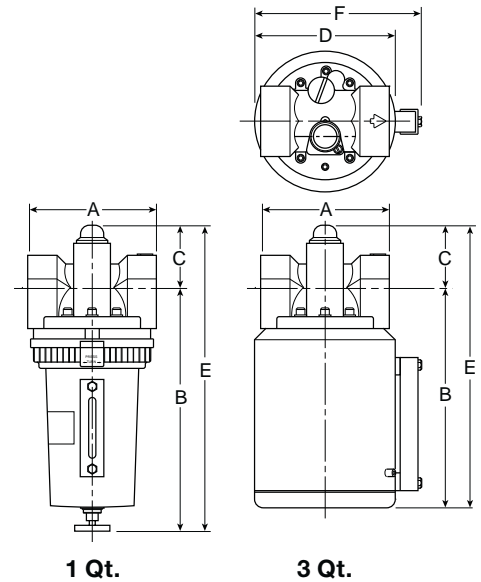


Port Size	NPT
Metal Bowl / Sight Gauge – 1 Quart	
2"	09L84BA
Metal Bowl / Sight Gauge – 3 Quart	
2"	09L8PBA

09L Lubricator Dimensions						
	A	B	C	D	E	F
1 Qt.						
3 Qt.						

Inches (mm)

Standard part numbers shown bold.
For other models refer to ordering information below.
§ SCFM = Standard Cubic Feet Per Minute at 900 PSIG Inlet, and 5 PSIG Pressure Drop.


Ordering Information

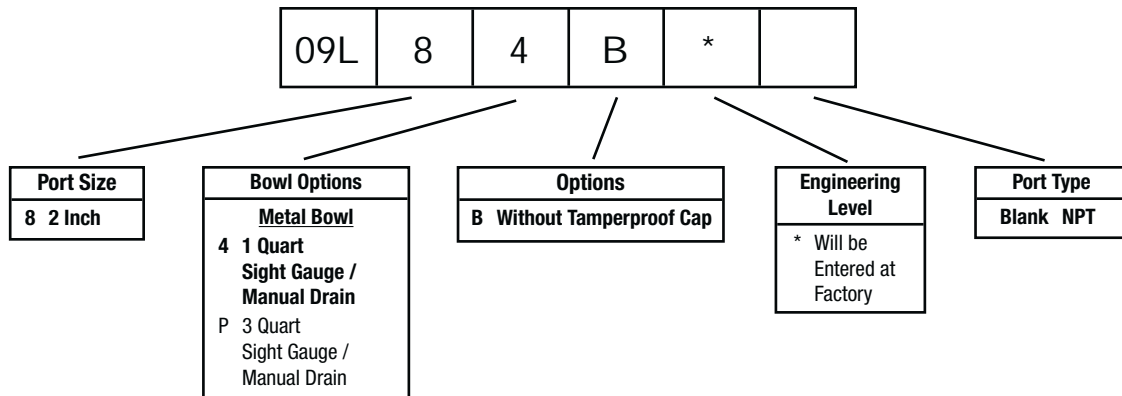

BOLD ITEMS ARE MOST POPULAR.



Technical Information

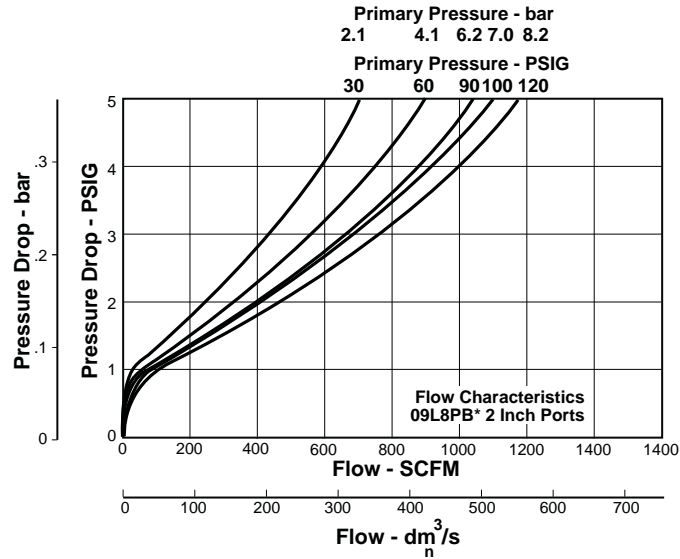

09L Lubricator Kits & Accessories

- Fill Cap Kit
- Lubricator Service Kit
- Metal Bowl – T D
- Oil – C F F F
- Sight Dome Kit
- * 1 Quart Bowl

Specifications

- Bowl Capacity O
- Bowl
- Drain T D
- Port Threads I
- Pressure & Temperature Rating I F F C C
- Suggested Lubricant F O
- DO NOT USE OILS CONTAINING ADDITIVES
 WHICH WILL CAUSE CORROSION OR
 DAMAGE TO THE LUBRICATOR
- Weight



Materials of Construction

- Body A D C



Close Nippled Combinations – 14 Miniature Series

Two-Unit
Combo

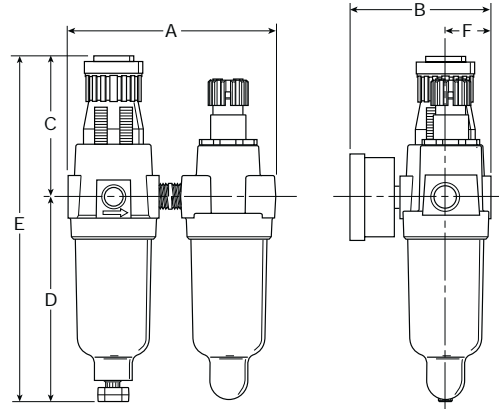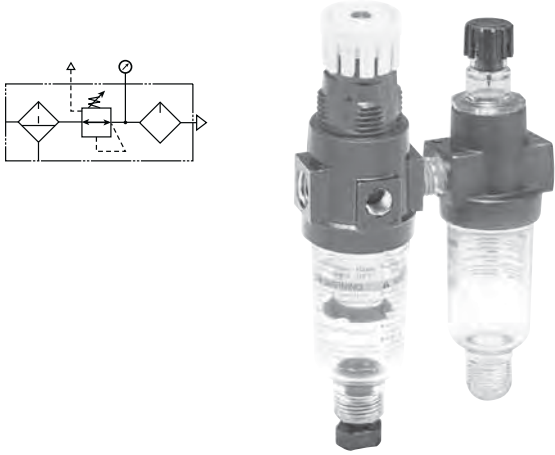



Series	Port	Model Numbers
14G		14G01B13F0G*
		14G11B13F0G*

For other models, refer to ordering information on next page.
For polycarbonate bowl see Caution on inside cover.

A	B	C	D	E	F

I
N A

Three-Unit
Combo

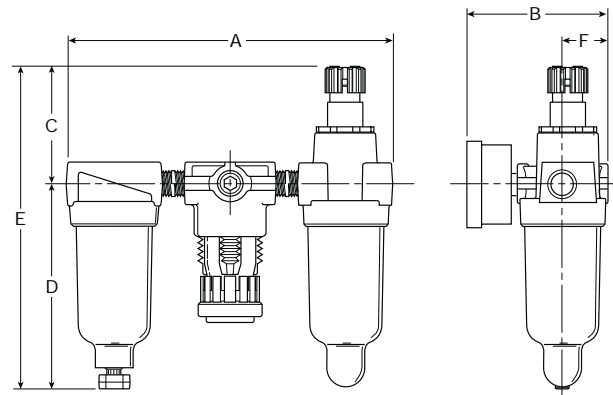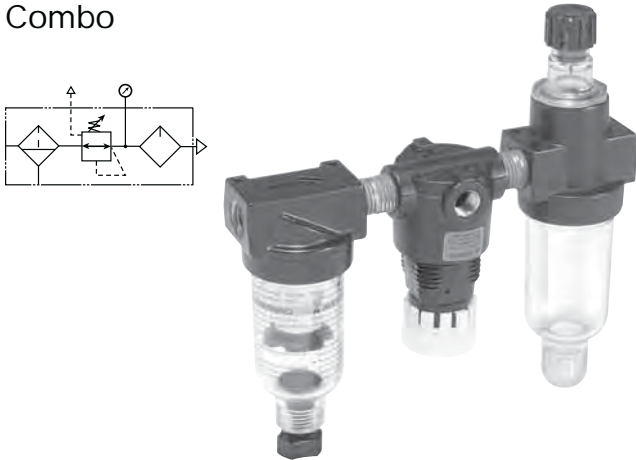

Series	Port	Model Numbers
14A		14A01B13F0G*
		14A11B13F0G*

For other models, refer to ordering information on next page.
For polycarbonate bowl see Caution on inside cover.

A	B	C	D	E	F


I
N A

BOLD ITEMS ARE MOST POPULAR.



Close Nippled Combinations – 14 Miniature Series

Ordering Information

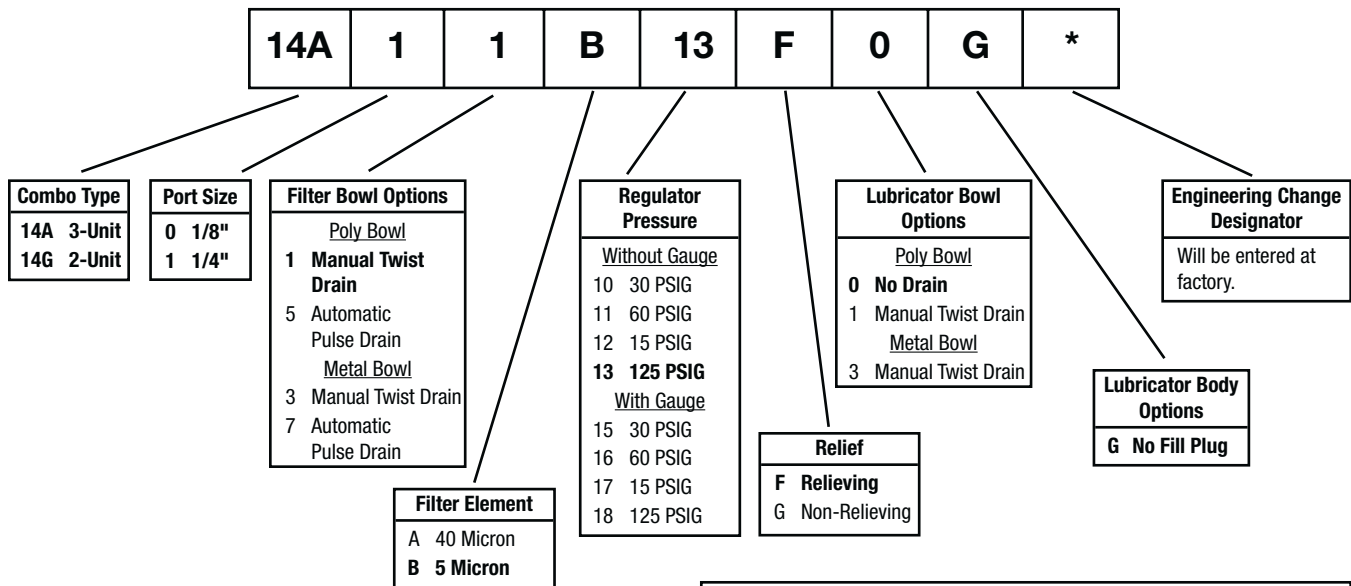


⚠ WARNING

Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

⚠ CAUTION:
REGULATOR PRESSURE ADJUSTMENT – T

F

Mounting Bracket Kits

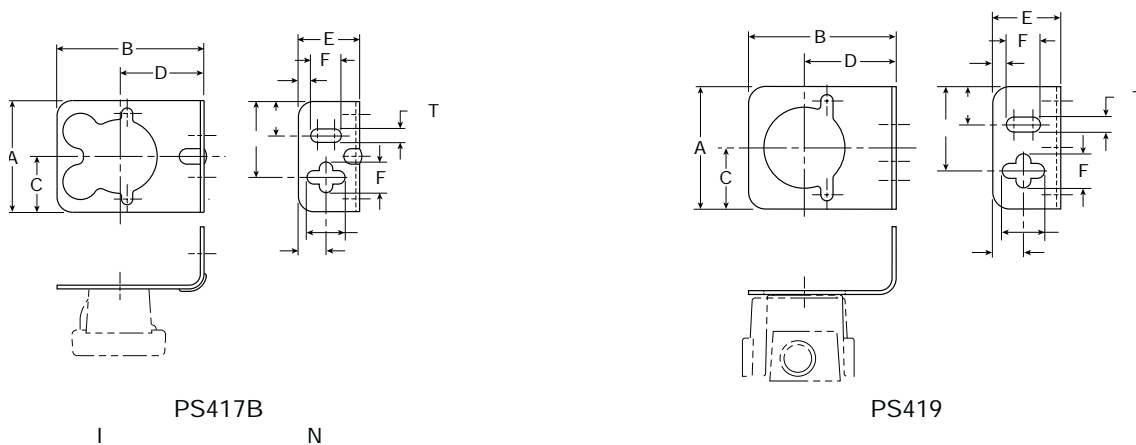



Dimensions

A	B	C	D	E	F	G	H	J	K	L	M	Kit
												PS417B F F E
												PS419

I
N A

Close Nippled Combinations – C528 Miniature Series

Two-Unit
Combo

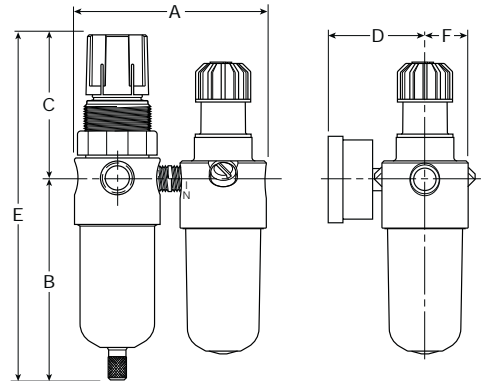



Series	Port	Model Numbers
C528BL		C528**BLAHCA
		C528**BLDHCD

** Port Size 01 = 1/8", 02 = 1/4".
For other models, refer to ordering information on next page.
For polycarbonate bowl see Caution on inside cover.

A	B	C	D	E	F

I
N A

Three-Unit
Combo

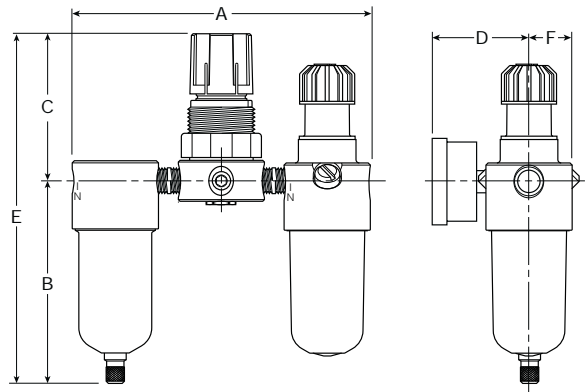

Series	Port	Model Numbers
C528FRL		C528**FRLAHCA
		C528**FRLDHCD

** Port Size 01 = 1/8", 02 = 1/4".
For other models, refer to ordering information on next page.
For polycarbonate bowl see Caution on inside cover.

A	B	C	D	E	F


I
N A

BOLD ITEMS ARE MOST POPULAR.



Close Nipped Combinations – C528 Miniature Series


Ordering Information

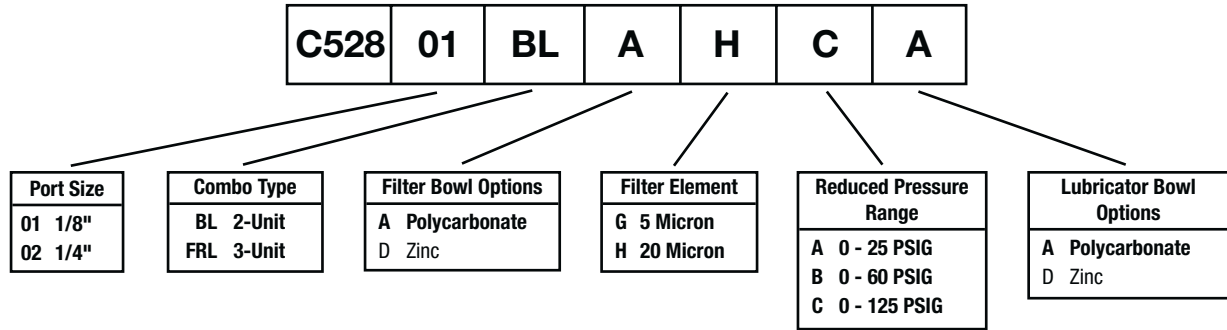

⚠ WARNING
Product rupture can cause serious injury. Do not connect regulator to bottled gas. Do not exceed maximum primary pressure rating.

⚠ CAUTION:
REGULATOR PRESSURE ADJUSTMENT – T
T
F

Mounting Bracket Kit



SA161X57

C

N

Dimensions




A	B	C	D	E	F	G	H	J	K	L

I
N A

Close Nippled Combinations – C10 Compact & Standard Series

- See individual component pages for details.

Two-Unit Combo

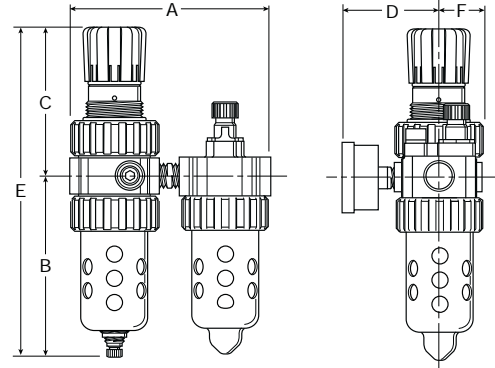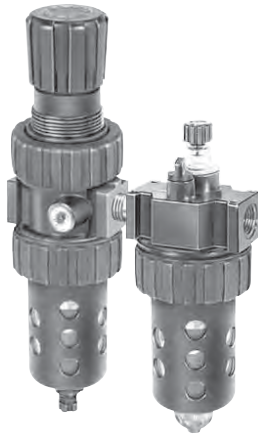



Series	Port Size	Model Numbers
C10	1/4" (Compact)	C10-02BL2A11A2B*
	3/8" (Compact)	C10-03BL2A11A2B*
	1/2" (Compact)	C10-04BL2A11A2B*
	3/4" (Standard)	C10-06BL2A11A2B*

For other models, refer to ordering information on next page.

C10 2-Unit Combination Dimensions					
A	B	C	D	E	F
C10-02BL, C10-03BL, C10-04BL Compact					
C10-06BL Standard					

Inches (mm)
 • All dimensions nominal.

Three-Unit Combo

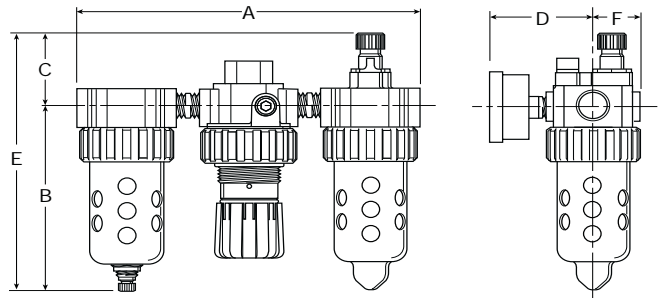

Series	Port Size	Model Numbers
C10	1/4" (Compact)	C10-02FRL2A11A2B*
	3/8" (Compact)	C10-03FRL2A11A2B*
	1/2" (Compact)	C10-04FRL2A11A2B*
	3/4" (Standard)	C10-06FRL2A11A2B*

For other models, refer to ordering information on next page.

C10 3-Unit Combination Dimensions					
A	B	C	D	E	F
C10-02FRL, C10-03FRL, C10-04FRL Compact					
9.45 (240)	5.69 (145)	2.24 (57)	3.18 (81)	7.93 (201)	1.37 (35)
C10-06FRL Standard					
10.74 (2738)	6.97 (177)	2.41 (61)	3.44 (87)	9.38 (238)	1.63 (41)



Inches (mm)
 • All dimensions nominal.

BOLD ITEMS ARE MOST POPULAR.



Close Nippled Combinations – C10 Compact & Standard Series

Ordering Information

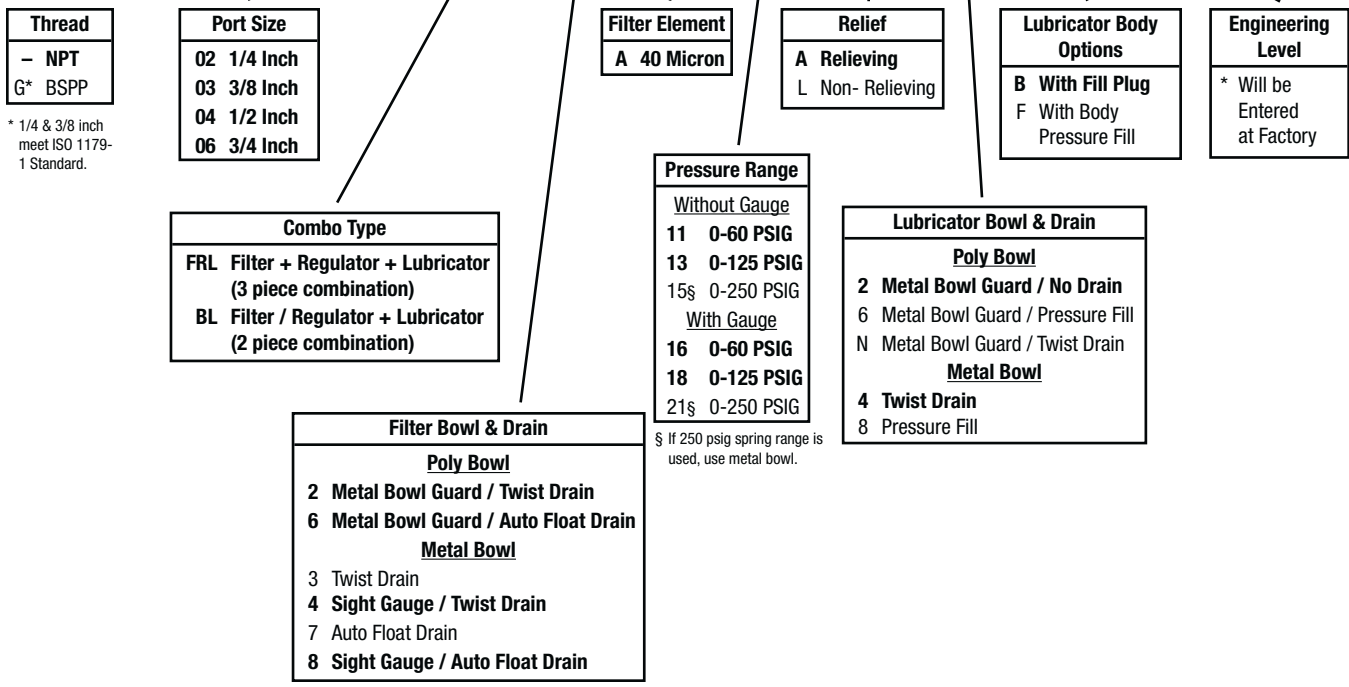

BOLD ITEMS ARE MOST POPULAR.

	<p>CAUTION: REGULATOR PRESSURE ADJUSTMENT – T</p> <p style="text-align: right;">T</p> <p>F</p>
--	--

	<p>WARNING</p> <p>Product rupture can cause serious injury. Do not connect regulator to bottled gas. Do not exceed maximum primary pressure rating.</p>
--	--

For polycarbonate bowl and sight dome, see Caution on Inside Cover.

Kits & Accessories

(See individual component sections for other kits and accessories.)



- Mounting Bracket Kit (Includes Panel Mount Nut)**
- 1/4", 3/8", 1/2"PS707
 - 3/4"PS807



Standard Combinations – C628 Series

Three-Unit Combo

- See individual component pages for details.
- Gauges included on combinations.

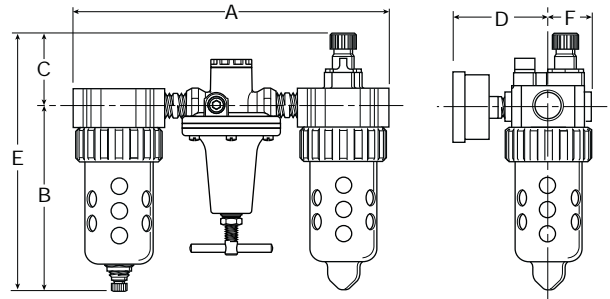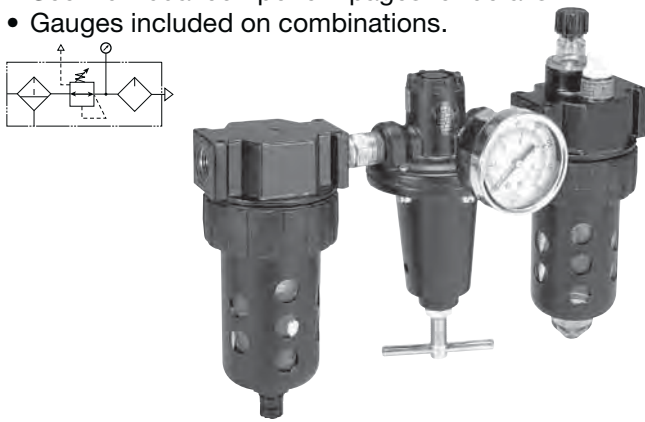

Series	Port Size	Model Numbers
C628	1/4"	C628-02FRL2ACA2B*
	3/8"	C628-03FRL2ACA2B*
	1/2"	C628-04FRL2ACA2B*

A	B	C	D	E	F
C628-02FRL, C628-03FRL					
C628-04FRL					

For other models, refer to ordering information.

Inches (mm)
• All dimensions nominal.

Ordering Information



Thread
- NPT
G* BSPP

Port Size
02 1/4 Inch
03 3/8 Inch
04 1/2 Inch

Filter Element
A 40 Micron

Relief
A Relieving
L Non-Relieving

Lubricator Body Options
B With Fill Plug
F With Body Pressure Fill

Engineering Level
* Will be Entered at Factory

* 1/4 & 3/8 inch meet ISO 1179-1 Standard.

Combo Type
FRL Filter + Regulator + Lubricator (3 piece combination)

Pressure Range
C 0-125 psig
D 0-250 psig

Filter Bowl & Drain
Poly Bowl!
2 Metal Bowl Guard / Twist Drain
6 Metal Bowl Guard / Auto Float Drain
Metal Bowl!
3 Twist Drain
4 **Sight Gauge / Twist Drain**
7 Auto Float Drain
8 **Sight Gauge / Auto Float Drain**

Lubricator Bowl & Drain
Poly Bowl
2 Metal Bowl Guard / No Drain
6 Metal Bowl Guard / Pressure Fill
N Metal Bowl Guard / Twist Drain
Metal Bowl
4 **Twist Drain**
8 Pressure Fill

⚠ WARNING
Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

⚠ CAUTION:
REGULATOR PRESSURE ADJUSTMENT – T

F T

For polycarbonate bowl and sight dome, see Caution on Inside Cover.



BOLD ITEMS ARE MOST POPULAR.



Standard Combinations – C628 Series

Three-Unit Combo

- See individual component pages for details.
- Gauges included on combinations.

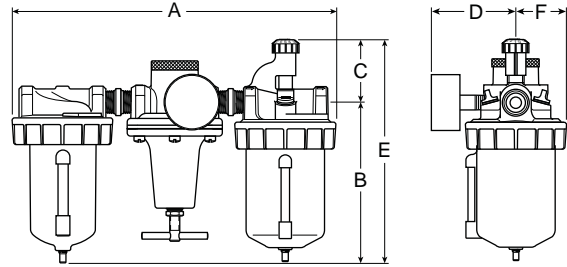


Series	Port Size	Model Numbers
C628		C628-06FRLWJCW
		C628-08FRLWJCW
		C628-10FRLWJCW
		C628-12FRLWJCW

A	B	C	D	E	F
C628-06FRL, C628-08FRL					
C628-10FRL, C628-12FRL					

Inches (mm)
• All dimensions nominal.

For other models, refer to ordering information below.

Ordering Information



Thread - NPT	Port Size 06 3/4 Inch 08 1 Inch 10 1-1/4 Inch 12 1-1/2 Inch	Combo Type FRL Filter + Regulator + Lubricator (3 piece combination)	Filter Element J 40 Micron	Drains and Options H Button Head Fill Fitting (Lubricator) K Non-Relieving Regulator Q External Heavy Duty Auto Drain (Filter) R Internal Auto Drain (Filter) X9 Manual Twist Drain on Lubricator (Increases Product Length by 9/16 Inch)
		Filter Bowl Options E 32 oz. Large Capacity wo/ Sight Gauge W 16 oz. Metal w/Sight Gauge	Pressure Range C 0-125 psig D 0-250 psig	
			Lubricator Bowl Options E 32 oz. Large Capacity wo/ Sight Gauge W 16 oz. Metal w/Sight Gauge	

CAUTION:
REGULATOR PRESSURE ADJUSTMENT – T

T

F

WARNING

Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

BOLD ITEMS ARE MOST POPULAR.



Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories

WARNING:

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS ("PRODUCTS") CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:

U

F

E

B

1. GENERAL INSTRUCTIONS

- 1.1. Scope: This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.
- 1.2. Fail-Safe: Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.
- 1.3. Relevant International Standards: For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See www.iso.org for ordering information.
- 1.4. Distribution: Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.5. User Responsibility: Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
 - Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
 - Assuring that all user's performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
 - Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
 - Assuring compliance with all applicable government and industry standards.
- 1.6. Safety Devices: Safety devices should not be removed, or defeated.
- 1.7. Warning Labels: Warning labels should not be removed, painted over or otherwise obscured.
- 1.8. Additional Questions: Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2. PRODUCT SELECTION INSTRUCTIONS

- 2.1. Flow Rate: The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.
- 2.2. Pressure Rating: Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for maximum pressure ratings.
- 2.3. Temperature Rating: Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.
- 2.4. Environment: Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.
- 2.5. Lubrication and Compressor Carryover: Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.
- 2.6. Polycarbonate Bowls and Sight Glasses: To avoid potential polycarbonate bowl failures:
 - Do not locate polycarbonate bowls or sight glasses in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
 - Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, ketones, esters or certain alcohols.

D

Safety Guide

2.7. Chemical Compatibility: F

T T T

D

2.8. Product Rupture:

D

D

D

C

3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS

3.1. Component Inspection:

A

F
DO NOT

3.2. Installation Instructions:

T

I

I

F

F
C A E

3.3. Air Supply: T

F

4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS

4.1. Maintenance: E

F

T

D

A

4.2. Installation and Service Instructions: B

B

F

I

I

F

T
C A E

4.3. Lockout / Tagout Procedures: B

O A

CF

A

A T C

E

F
T

4.4. Visual Inspection: A

A

D

A

I

E

D

Caution: Leak detection solutions should be rinsed off after use.

4.5. Routine Maintenance Issues:

4.6. Functional Test: B

4.7. Service or Replacement Intervals: I

F

E

F

4.8. Servicing or Replacing of any Worn or Damaged Parts: T

F

T

D

D

I

A

O A

CF

A

A T C

E

O A
T

D

I

I

4.9. Putting Serviced System Back into Operation: F

F

I

I



The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors ("Seller") are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods or work described will be referred to as "Products".

- 1. Terms and Conditions.** Seller's willingness to offer Products, or accept an order for Products, to or from Buyer is subject to these Terms and Conditions or any newer version of the terms and conditions found on-line at www.parker.com/saleterms/. Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document issued by Buyer.
- 2. Price Adjustments; Payments.** Prices stated on Seller's quote or other documentation offered by Seller are valid for 30 days, and do not include any sales, use, or other taxes unless specifically stated. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and is due 30 days from the date of invoice or such other term as required by Seller's Credit Department, after which Buyer shall pay interest on any unpaid invoices at the rate of 1.5% per month or the maximum allowable rate under applicable law.
- 3. Delivery Dates; Title and Risk; Shipment.** All delivery dates are approximate and Seller shall not be responsible for any damages resulting from any delay. Regardless of the manner of shipment, title to any products and risk of loss or damage shall pass to Buyer upon placement of the products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.
- 4. Warranty.** Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve months from the date of delivery to Buyer or 2,000 hours of normal use, whichever occurs first. The prices charged for Seller's products are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED HEREUNDER. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**
- 5. Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon delivery. No claims for shortages will be allowed unless reported to the Seller within 10 days of delivery. No other claims against Seller will be allowed unless asserted in writing within 30 days after delivery. Buyer shall notify Seller of any alleged breach of warranty within 30 days after the date the defect is or should have been discovered by Buyer. Any action based upon breach of this agreement or upon any other claim arising out of this sale (other than an action by Seller for an amount due on any invoice) must be commenced within 12 months from the date of the breach without regard to the date breach is discovered.
- 6. LIMITATION OF LIABILITY.** UPON NOTIFICATION, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE. **IN NO EVENT SHALL SELLER BE LIABLE TO BUYER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, EVEN IF SELLER HAS BEEN NEGLIGENT, WHETHER IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**
- 7. User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.
- 8. Loss to Buyer's Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.
- 9. Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.
- 10. Buyer's Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller shall retain a security interest in the goods delivered and this agreement shall be deemed a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.
- 11. Improper use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any claim, liability, damages, lawsuits, and costs (including attorney fees), whether for personal injury, property damage, patent, trademark or copyright

infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, improper application or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Product; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

12. Cancellations and Changes. Orders shall not be subject to cancellation or change by Buyer for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change product features, specifications, designs and availability with notice to Buyer.

13. Limitation on Assignment. Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

14. Force Majeure. Seller does not assume the risk and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure") Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.

15. Waiver and Severability. Failure to enforce any provision of this agreement will not waive that provision nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

16. Termination. Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days written notice of termination. Seller may immediately terminate this agreement, in writing, if Buyer: (a) commits a breach of any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or by a third party (d) makes an assignment for the benefit of creditors, or (e) the dissolves or liquidates all or a majority of its assets.

17. Governing Law. This agreement and the sale and delivery of all Products hereunder shall be deemed to have taken place in and shall be governed and construed in accordance with the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.

18. Indemnity for Infringement of Intellectual Property Rights. Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this Agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

19. Entire Agreement. This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged.

20. Compliance with Law, U. K. Bribery Act and U.S. Foreign Corrupt Practices Act. Buyer agrees to comply with all applicable laws and regulations, including both those of the United Kingdom and the United States of America, and of the country or countries of the Territory in which the Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA") and the U.S. Anti-Kickback Act (the "Anti-Kickback Act"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that they are familiar with the provisions of the U. K. Bribery Act, the FCPA and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer shall not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase products or otherwise benefit the business of Seller.

02/12

Parker Hannifin Corporation
Pneumatic Division
8676 E. M89
P.O. Box 901
Richland, MI 49083 USA
Tel: 269 629 5000
Fax: 269 629 5385

Applications Engineering
Phone: 877 321 4PDN Option #2
E-mail: pdnapps@parker.com
Customer Support
Phone: 877 321 4PDN Option #1
E-mail: pdncustsvc@parker.com
Web site: www.parker.com/watts

