


# Cop-R-Lube®

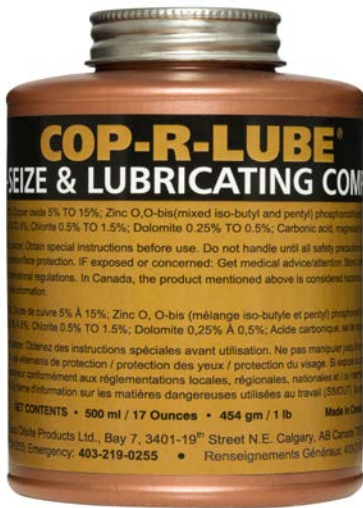

Cop-R-Lube® is a versatile thread compound and anti-seize for use on a number of threaded connections. It has extreme pressure additives as well as corrosion inhibitors to ensure that threads make up properly and have a clean breakout on disassembly. Cop-R-Lube® resists rust and galvanic pitting when applied to metal surfaces.

Cop-R-Lube® contains fine copper flake that plates out on metal surfaces and serves as a barrier to prevent metal to metal contact in the connection.

## ▶ SERVICE RECOMMENDATIONS

Cop-R-Lube® is recommended as a premium grade, high temperature anti-seize for use on bolts, nuts and studed connections. It is used by machine shops, the automotive industry, metal fabricators, equipment manufacturers as well as numerous home upkeep and repair applications.

## ▶ PERFORMANCE CHARACTERISTICS

- A copper based product that contains amorphous graphite to prevent metal compaction
- Blended with anti-seize agents to prevent galling and thread damage during break-out
- Contains corrosion inhibitors that act as a barrier to galvanic pitting during storage
- Recommended for higher torque applications

## ▶ PRODUCT SPECIFICATIONS

Thickener	Calcium Sulfonate Complex
Fluid Type	Petroleum / Synthetic
Flash Point	> 180°C / 356°F
Service Rating	200°C / 392°F
NLGI Grade	1
Colour	Copper
Friction Factor	1.15
Pen Range	300 – 360 (ASTM D217) seasonal adjustment
Brushability	-40°C / -40°F
Drop Point	> 204°C / 400°F

## ▶ PACKAGING

225 ml Brush Top Can	Net 227 gm / ½ lb
500 ml Brush Top Can	Net 454 gm / 1 lb
1 l Can	Net 907 gm / 2 lb

**Warranty:** This compound shall be free of defects at time of manufacture. Warranty shall be limited to the refund of the purchase price. All other liability is negated and disclaimed and Topco Oilsite Products shall not be liable for consequential or incidental damages.



[www.topcooilsite.com](http://www.topcooilsite.com)

toll free: 1-800-222-6448

